



## STAR ONLINE PUBLICATION



**Case Number:** S2508000077


**Release Date:** September 2025

**Symptom/Vehicle Issue:** Radio Frequency Hub (RFH) Fails Flash Update Fails

**Technician Observation:** The technician has attempted to flash the rfhub multiple times with a repeated message the flash has failed.

**Discussion:** In some cases even while maintaining the proper battery voltage the RFHUB flash fails and will not complete. In these rare cases where the RFHUB flash will may not complete, remove the B+ feed Fuse 8 for the cluster and reattempt the flash.

Example: While performing TSB 08-232-25

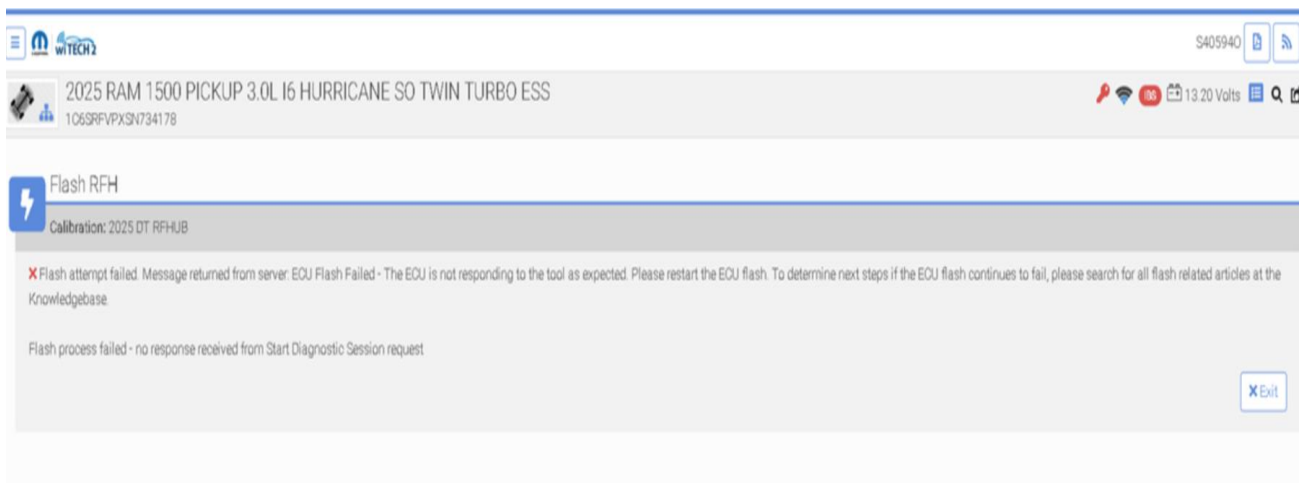

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

**Contact STAR Center, or your Technical Assistance Center Via TechConnect, eCONTACT or Service Library entry if no solution is found.**