


Title:	Husky 3 Foam Upgrades			
Number:	PB_757	Release Date:	12/02/2025	
Revision Number:	Not Applicable	Revision Date:	Not Applicable	
Chassis Type:	Custom Chassis			
Component Description:	Upgraded Husky 3 Display/Control Head, Condensed Manifold, Foam Pump, and Power Unit			

This is a Parts Bulletin. The upgrades outlined in this bulletin are optional. Parts and labor associated with these upgrades are not covered under warranty. Parts associated with this product upgrade are available for purchase through the dealer network.

Subject:

We are excited to share several updates to our Husky 3 foam system. This has been a collaboration of your feedback to improve durability, manage parts obsolescence along with industry changes with foam application.

Description:

Display/Control Head:



- The current Husky 3 display uses components that are becoming obsolete. We are working with our supplier on a new version that keeps the existing features and simple operation.
- New features will be added over time as we continue to develop the control system.
- The new display will be backwards compatible using a conversion harness and mounting plate.
- **Planned implementation in the first quarter of 2026.**

Parts Impacted	
PN	Description
2063970	Controller, H-3


Retrofit Parts	
PN	Description
4794684	Adapter, Plate, H3, Retrofit
4773771-0001	Display, H3, Gen 2
4773773-0001	Controller, H3, Gen 2
4773775	Harness, H3 Foam, Retrofit
4773776	Harness, H3, Adapter, Display

Foam-Draft Controls (Condensed Manifold Design):



- The current foam draft control assembly on the left is being replaced with a manifold design to provide a simpler installation and operation.
- **Planned implementation in the fourth quarter of 2025.**

Foam Pump Updates:

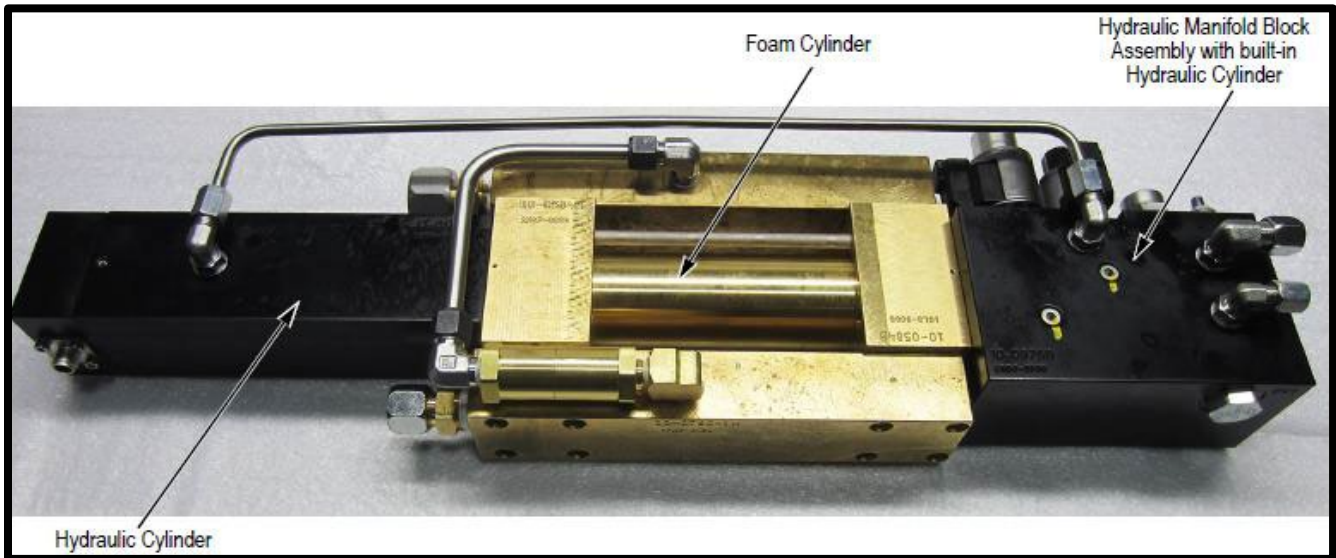

- The foam pump now uses **Buna seals** instead of **EPDM seals** to enhance durability.
- Please continue to follow the operation manual (PM-F-OM590) for foam system use and flushing procedures.
- See *SB_446 Husky 3 Foam Pump – GEN 1 Pump Discontinued* and *PB_383 Husky 3 Pump Refurbishment Program* for PN's and information required to upgrade to the new Gen 2.1 foam pump.
- See *Husky 3 Gen.1 to Gen.2 Replacement Work Instruction* for the replacement procedure for the new foam pump.
 - These work instructions can be found on PierceParts.com under "Technical Support".
- **This change was implemented in December 2024.**

Husky 3 Power Unit Updates:



- The current power unit assembly on the left has been revised due to obsolescence of the electric motor and the removal of the now-unnecessary heat exchanger.
- As a result, the overall package is more compact and the symbol on the approval drawing will reflect the new design.
- **This change was implemented in December 2024.**

Parts Impacted	
PN	Description
2359989	Power Unit Assy, H-3

Retrofit Parts	
PN	Description
4544849	Power Unit Assy, H-3

If any additional support is needed, please open a technical support incident on www.pierceparts.com.