



Service Bulletin

Bulletin No.: PIC6511C

Date: January, 2026

PRELIMINARY INFORMATION


Subject: Diagnostic Tip - Unwanted Park Assist Indication

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Cadillac	Lyriq	2023 - 2026		All	All	All	All
Chevrolet	Traverse (All New)	2024 - 2026		All	All	LK0	All
GMC	Acadia	2024 - 2026		All	All	LK0	All

Involved Region or Country	North America
Condition	A customer may comment that the Park Assist will indicate an object detected intermittently from either the left or right front middle sensors.
Cause	Possible interference from front License Plate Frame.

Correction

Example of Park Assist indicator.

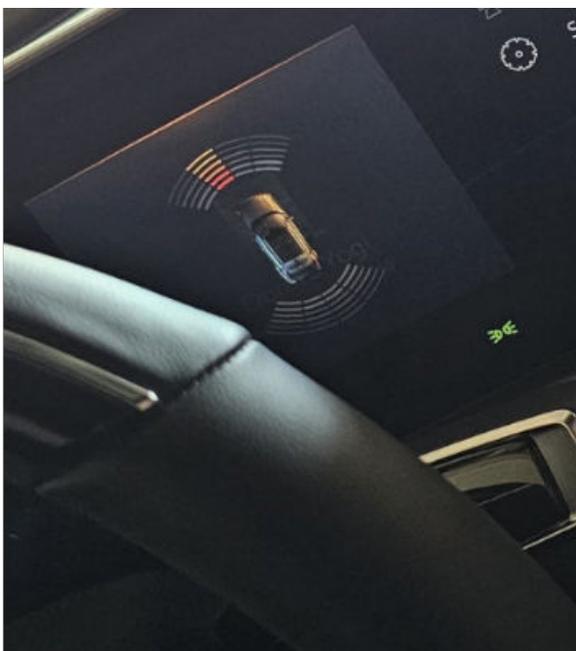

6383071



6383072

1. Check for a License Plate Frame to be installed on the front License Plate similar to the picture above.
2. If a License Plate Frame is present, remove the frame and re-evaluate for the concern.
3. If the concern is no longer present, do not re-install the License Plate Frame.
4. If the concern is still present, refer to normal SI Diagnostics.

Version	4
Modified	07/12/2023 - Created on. 07/31/2024 - Updated Models. 08/13/2025 - Updated Model Years. 01/26-2026 - Updated Model Years.

