



Service Bulletin

Bulletin No.: PIT6477A


Date: January, 2026

PRELIMINARY INFORMATION

Subject: Unable to Perform GDS2 Automated Bleed After Master Cylinder Replacement

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Cadillac	Escalade	2026		ALL	ALL	ALL	ALL
Cadillac	Escalade ESV	2026		ALL	ALL	ALL	ALL
Chevrolet	Suburban	2026		ALL	ALL	ALL	ALL
Chevrolet	Tahoe	2026		ALL	ALL	ALL	ALL
GMC	Yukon	2026		ALL	ALL	ALL	ALL
GMC	Yukon XL	2026		ALL	ALL	ALL	ALL

Involved Region or Country	North America
Condition	Some Technicians may notice that they get an error screen when trying to perform the automated bleed after master cylinder replacement, (See Error Screen Below).
Cause	Software Anomaly with GDS2 Software.

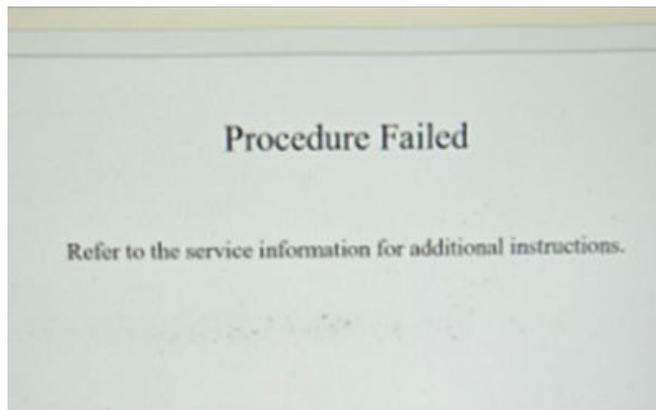

7058016

Correction

In some cases, performing a 12V battery disconnect for several minutes and then attempting the GDS2 automated bleed procedure a second time has allowed the procedure to successfully complete.

If you continue to have issues, then engineering is investigating the concern. The PI will be updated or replaced with a TSB once a determination has been made

Do not replace the A104 Brake Master Cylinder assembly as this will not correct the issue.

Version	2
Modified	01/26/2026- Created on 01/30/2026- Updated to add additional note to correction field

