



Countries: CANADA, MEXICO Document ID: IK1300197  
 Availability: Revision: 0  
 Major System: TRANSMISSION Created: 1/15/2026  
 Current Language: English Last Modified: 1/16/2026  
 Other Languages: NONE Author: Frank Amstadt  
 Viewed: 40

[Less Info](#)

Hide Details

Coding Information

Copy Link 	Copy Relative Link 	Bookmark  <a href="#">View My Bookmarks</a>	Add to Favorites 	Print 	Provide Feedback 	Helpful  1	Not Helpful  0
---------------	------------------------	---	----------------------	-----------	----------------------	------------------	----------------------

Title: T14 Upper Transmission Harness Updates

Applies To: LT, RH, HV, HX, S13, T14

## CHANGE LOG

Please refer to the change log text box below for recent changes to this article:

09/23/2015 - Initial Article Release

## DESCRIPTION

This document will guide the user through T14 Upper Transmission Harness replacement along with TOSS (Transmission Output Shaft Sensor) replacement on select, effected vehicles.

## SYMPTOM(s)

Diagnostic Trouble Code(s) & Dashboard Indicator Light(s):

DTC/Light	Description
N/A	

Customer Observations or Concerns:

## SPECIAL TOOL(s) / SOFTWARE


Tool Description	Tool Number	Comments	Instructions
N/A			

## SERVICE PARTS INFORMATION

Kit Description	Part Number	Quantity Required	Notes
Rear Gearbox Harness Cable, Gms	112221N91	1	
Output Shaft Speed Sensor	115139N1	1	

## DIAGNOSTIC STEP(S)

The Rear Gearbox Harness (Upper Transmission Harness) has been updated for better fitment. One key change is a new harness side connector design for the TOSS (Transmission Output Shaft Sensor) to match the updated TOSS. The new harness and new TOSS use different keying than the older versions, which has caused confusion when updated harnesses does not fit the original TOSS.

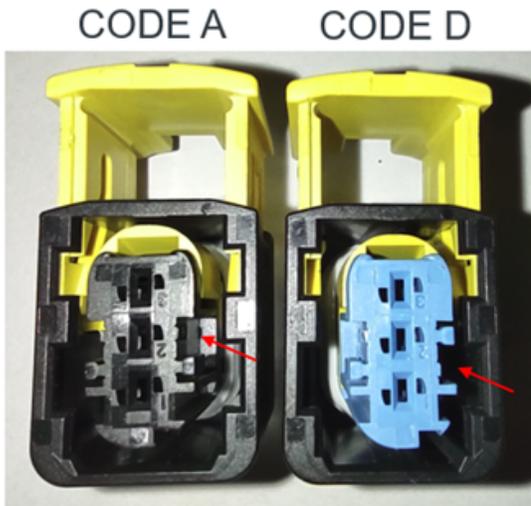

To avoid confusion and reduce downtime:

- **If diagnostics indicate replacing the transmission harness (112221N91):**  
Check that the new harness fits the TOSS currently installed.
  - If it does **not** fit, the TOSS must also be replaced with the updated version (115139N1).
- **If diagnostics indicate replacing the TOSS:**  
Check that the new TOSS (115139N1) fits the existing harness.
  - If the connector does **not** fit, the existing harness is the original version and must be replaced with the updated harness (112221N91).

# WARRANTY INFORMATION

## Warranty Claim Coding:

Refer to the [Warranty Coding Manual](#) for Group and Noun Codes.

---

## Standard Repair Time(s):

Refer to the [SRT Manual](#) for Repair Times

---

# OTHER RESOURCES

[Master Service Information Site](#)

 Hide Details

### Feedback Information

Viewed: 39  
Helpful: 1  
Not Helpful: 0

No Feedback Found