



## STAR ONLINE PUBLICATION



**Case Number: S2609000003 REV. A**

**Release Date:** February 2026


**Symptom/Vehicle Issue:** Active Diagnostic Trouble Code (DTC) U3FFF-00 Setting In The PCM

**Models Affected:** 25-26MY DJ, D2, DD, DJ, RAM 2500, 3500, 4500, 5500

**Customer Complaint/Technician Observation:** During pre-delivery inspection (PDI) the technician may find an active DTC setting the in the PCM U3FFF-00. The customer may or may not have a malfunction indicator lamp (MIL) illuminated and while viewing the vehicle scan report (VSR) an active U3FFF-00 setting in the PCM.

**Note: DO NOT replace any modules for this DTC.**

**Discussion:** The authenticated diagnostic access (ADA) in the PCM is in a disabled status and will need to be enabled to correct this condition. Currently, there is a routine in WiTECH to correct this condition. The DTC must be active for the routine to start. Follow the prompts until they are finished.

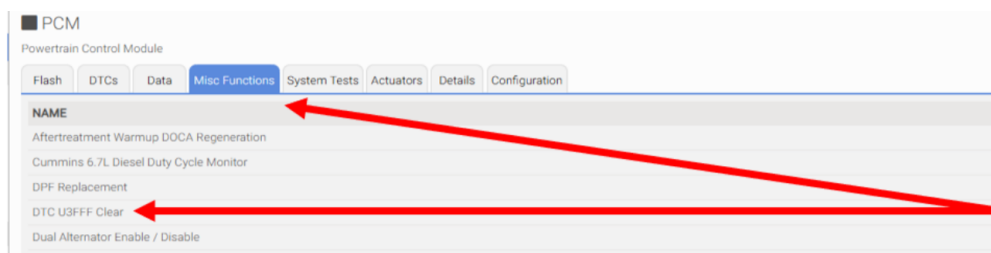

- DTC U3FFF Clear routine can be found under the PCM Misc. Functions Tab

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

**Contact STAR Center, or your Technical Assistance Center Via TechConnect, eCONTACT or Service Library entry if no solution is found.**