

 Preview Solution CBR-2565-1

Trailer, 12Volt Right/Left Direction Indicator Circuit Warning - AN (4) - PR - VN (4)

Published 5 March 2026

Valid For

Volvo Chassis - VN (4)

Mack Chassis - AN (4), PR

Model Year 2024 to current

The purpose of this CBR is to address proper troubleshooting of the following faults and address instrument cluster pop up

Overview


Instances of the following DTCs (below) are known to be short circuits in the trailer wiring and associated circuitry.

If fault tracing performed and leads to no fault found it has been determined to be a design flaw in the TBIOM detection logic (high amperage detection).

There is no correction at this time. This will be a Software and parameter correction, exact timing is unknown. It is recommended to perform a key cycle and functionality will return to normal operation.

TBIOM - C101E-11 - Trailer, 12V Right Direction Indicator Circuit

TBIOM - C101D-11 - Trailer, 12V Left Direction Indicator Circuit

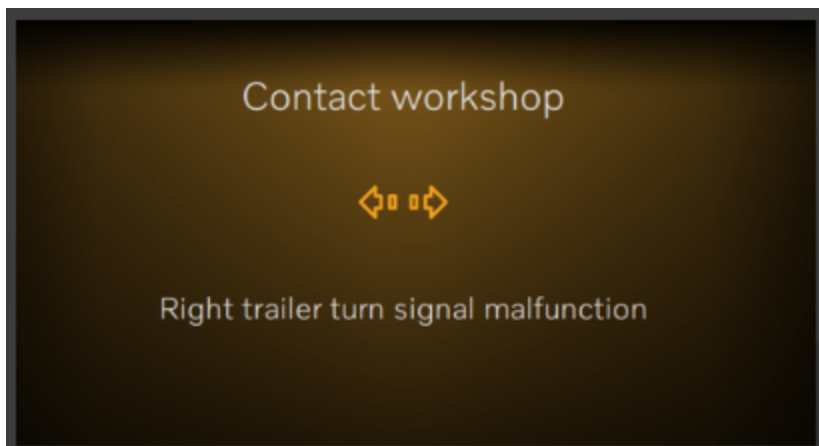

Related links and attachments

No links or attachments available



Share

to others that might find it helpful



Feedback

[Give feedback](#)

to help improve the content of this article