

## 174 - MB.OS 1.3.7 - IC Message "Driver Assistance System Functions Limited Please Drive with Caution See Operator's Manual" on every key cycle, All ADAS functions work correctly - U142791

---


Topic number	LI54.71-P-080653
Version	2
Function group	54.71 - Camera and radar-assisted assistance systems
Date	5/28/26
Validity	174 on MB.OS 1.3.7
Reason for change	Remedy Update

---

### Complaint

After updating MB.OS to 1.3.7, every key cycle displays consistent instrument cluster message "Driver Assistance System Functions Limited Please Drive with Caution See Operator's Manual".

Note: Verify this is the exact message, there are other variants of white ADAS cluster messages.

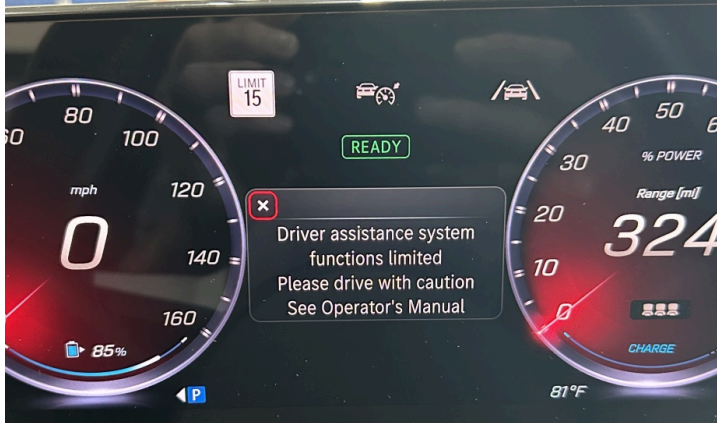

To verify MB.OS number, it can be found in:



1. A26/17 in Xentry under version or
2. VeDoc > Vehicle Information for Control Units (below reference, vehicle is on 1.3.0)

VEHICLE INFORMATION FOR CONTROL UNITS	
Secure software communication certificate class	MB.OS car package release customer version 1.3.0
Electronic drive line management certificate class	Car package release ID
	Car package release name IC1141 WVC2025-02_25.02.2.15 (Stable)
	Car package release version C119_M00R_2025-1-00_24.02.2.15.rc

The driver assistance control unit N62/5 Processor will also have an active and stored DTC U142791 - "Implausible data were received from the control unit 'Head unit'. The parameter is outside the permissible range."

### Attachments

---

File	Description
<p>MBOS Package Number.jpg</p>  <p>VEHICLE INFORMATION FOR CONTROL UNITS</p> <p>Secure onboard communication certificate chain MB OS car package release customer version 1.3.0</p> <p>Electronic drive line management certificate chain Car package release ID</p> <p>Car package release name [C174] HWC2025-02 25.49.2.15 [Stable]</p> <p>Car package release version C174_MAIN_2026-1.00_25.49.2.15-rc</p>	
<p>1.3.7 ADAS White Message on Start.jpg</p>  <p>Driver assistance system functions limited Please drive with caution See Operator's Manual</p>	

## Cause

Under Determination.

## Remedy

Check for new MB.OS update on May 29, 2026 from 1.3.7 to 1.3.10. If available, update and bus sleep (30 minutes). Re-check vehicle after bus sleep for presence of cluster message.

If message has cleared and concern is resolved, release the vehicle.

If not, open a TIPS case to Body, Chassis, and Entertainment inbox.

## Disclaimer

NOTE: The information contained in this document is intended for use by trained, professional technicians with the knowledge to properly and safely perform diagnosis and repairs on Mercedes-Benz vehicles, using Mercedes-Benz approved tools and equipment. It informs service technicians about conditions that could occur in certain vehicles and provides information that could assist in proper vehicle diagnosis, service, or repair. It does not indicate that a defect is present in any vehicle referenced in this document nor does it imply warranty coverage. DO NOT assume that a symptom or condition, or a described cause of a symptom or condition, affects any particular vehicle or groups of vehicles, or that a described repair applies to any particular vehicle or groups of vehicles. There can be multiple causes resulting in the same or similar symptoms or conditions described in this document, and trained professional service technicians must use their diagnostic skills to make evaluations on a case-by-case basis. The information contained in this document does not guarantee warranty coverage nor does it extend the vehicle's warranty in any way.

## Symptoms

# XENTRY Tips

---

Communication/information > Assistance and warning systems > Distronic > Function > Warning message in instrument cluster
Communication/information > Assistance and warning systems > Distronic > Function > Malfunction
Communication/information > Assistance and warning systems > Distronic > Display message > Function error
Communication/information > Information display > Displays > Multifunction display > Multifunction display, error messages > Implausible messages despite properly functioning message systems
Communication/information > Information display > Indicator lamp > lit
Communication/information > Assistance and warning systems > ATTENTION ASSIST > Warning message in instrument cluster

## Operation numbers/damage codes

Op. no.	Operation text	Time	Damage code	Note
---------	----------------	------	-------------	------