



Thor Motor Coach Technical Service Bulletin

TSB #	TSB 26-06		
Description/Title:	DC/DC Charger setting		
Affected Product Line(s):	Certain model year 2026-2027 Eddie Bauer Van, Palladium, Sanctuary, Talavera, Tranquility		
Service Campaign # :	RC000343		
Codes:	Inspect Only: TMCTS80251U Inspect with Repair: TMCTS80251J	Document Date:	8/31/2026
Time Allowed:	Inspect Only: 0.1 Inspect with Repair: 0.1	Document Revision:	A

Issue:

It has been discovered the DC/DC Charger may not have the correct (LiFePO4) type of house batteries selected. Constant exposure to improper charging will result in incomplete charging and/or premature battery aging.

Instructions:


1. Locate the DC/DC Charger under the passenger seat using the access door on the side of the pedestal.



2. Ensure the MODE setting is on LiFePO₄.



As a precautionary measure, ensure the grounding cable & stud under the passenger cockpit chair is secure and tight with the star washer touching the chassis metal and not on top of the ground cable with no contact to chassis metal.

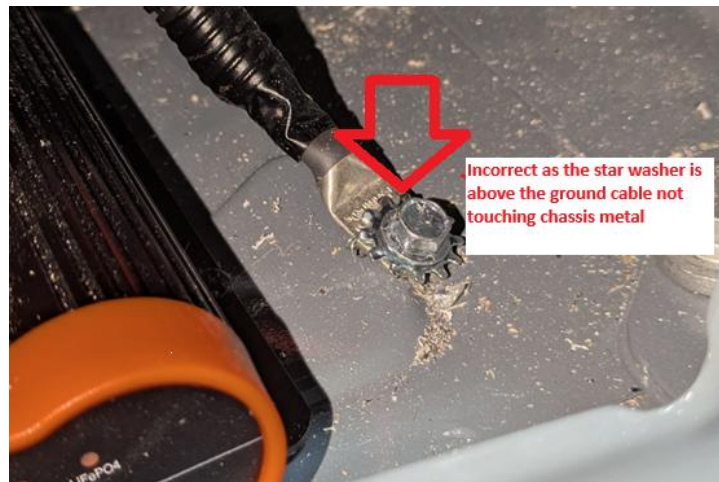



Thor Motor Coach Technical Service Bulletin

