



Service Bulletin

Bulletin No.: PIT5869B

Date: August, 2026

PRELIMINARY INFORMATION

Subject: SES MIL / AC Blows Warm Air / Fuse F4DR Open / DTC B1AA3 U3018 U3505

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Cadillac	Escalade	2021 - 2026		All	All	All	All
Cadillac	Escalade ESV	2021 - 2026		All	All	All	All
Chevrolet	Suburban	2021 - 2026		All	All	All	All
Chevrolet	Tahoe	2021 - 2026		All	All	All	All
GMC	Yukon	2021 - 2026		All	All	All	All
GMC	Yukon XL	2021 - 2026		All	All	All	All


Involved Region or Country	North America
Condition	Some customers may comment on the following symptoms: - SES MIL - A/C blows warm air - DTCs B1AA3 U3018 U3505 - Fuse F4DR open
Cause	The cause of these concerns could be circuit 4786, to the Front Floor Console Compartment Lamp, shorting out, opening the BCM 2 fuse F4DR.

Correction

If a root cause is not found after following normal SI diagnostics, then gain access to the front floor console lid hinge area to inspect the wiring for the console compartment lamp, see below. In some cases, the two circuits to the compartment lamp will be broken and shorted together, as shown. Repair/Replace any damaged circuits following normal SI wiring repairs.

Diagnostic Tip: Beginning with the 2025 model year, Service Information (SI) now includes BCM fused output schematics that can be used to identify all BCM outputs supplied by a specific fused input, such as F4DR. To view all outputs powered by the F4DR fuse, build SI as follows: Power and Signal Distribution → Wiring Systems and Power Management → Schematic and Routing Diagrams → F4DR Fuse and Body Control Module Fused Outputs

This information can be a valuable diagnostic aid when investigating concerns related to circuits powered by a specific BCM fused input.

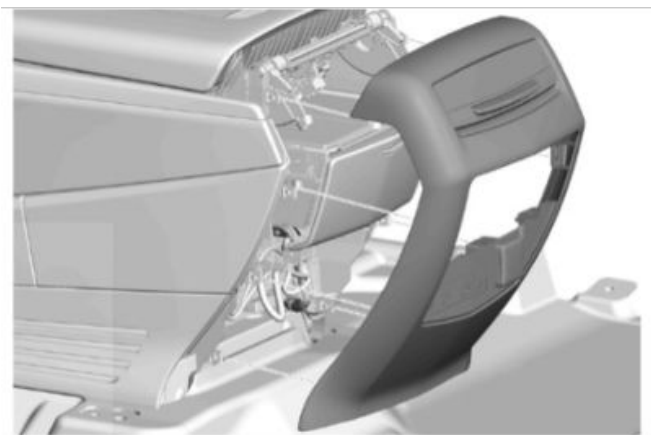

5927126



5927127

Warranty Information

For wiring repairs covered under warranty, please refer to latest version of bulletin 10-00-89-005 for warranty information on wire/connector repairs.

Version	3
Modified	11/29/2021 - Created on. 09/06/2023 - Update model years 08/26/2026 - Update to the correction and model sections

