

McLaren 750S Door Pocket Rework

This document is uncontrolled when printed. Before use, check the Knowledge Base within the McLaren Retailer Portal to verify that this is the current version.

Document Information

Location: Interior

Topic: McLaren 750S Door Pocket Rework

Condition: N/A

Diagnostic Trouble Codes: N/A

Measure


If the door pocket is reported an inoperative, please perform the below steps on the door pocket pendulum C-clip.

1. Remove the door casing, as per MSP instructions

2. Remove the clip from the door pocket pendulum:



3. Use pliers to make the clip visually straight - put it on a flat surface to check. Ensure the washer is still in place.

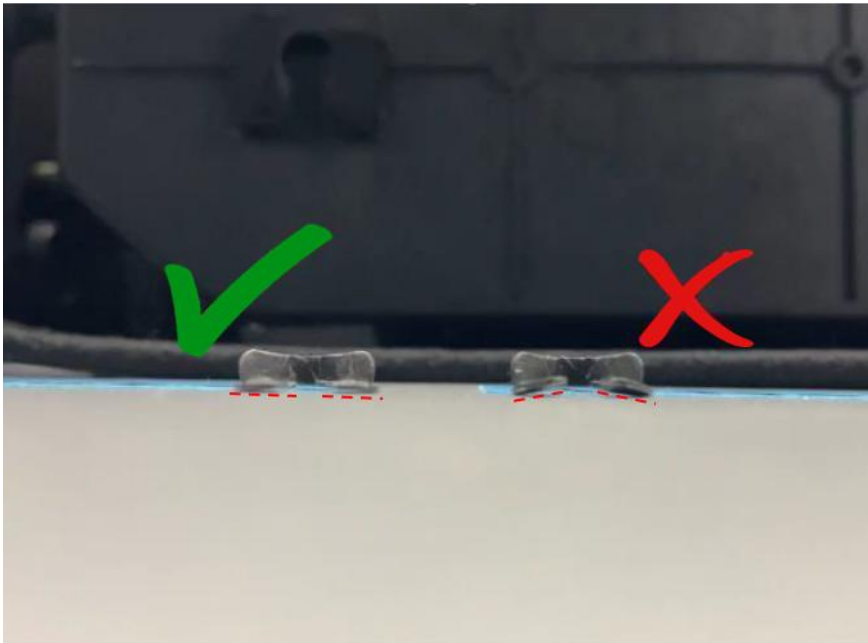

4. Fit the flattened clip back onto the door pocket pendulum
5. Refit the door casing, as per MSP instructions
6. Repeat for the other door

If replacement clips are required, please raise a Technical Request.

Parts Information

ASSY-DOOR CASING