

The Second Hand of the Sport Chrono Clock (Stopwatch) Runs Unevenly or Jumps Anti-Clockwise (71/26)

Model Line: **Macan (XAB)**

Model Year: **from 2024 to 2025**

Equipment: **Sport Chrono Package Plus (M-no. 8LH)**

Concerns: **Sport Chrono clock (stopwatch)**


Cause: **The customer complains that the second hand of the Sport Chrono clock (stopwatch) runs unevenly and sometimes jumps anti-clockwise.**

Information: Faulty timings in the bus system of the Sport Chrono clock (stopwatch) can occasionally lead to the above complaint.

Replacing the Sport Chrono clock (stopwatch) is not required for this complaint.

Action: In the event of a customer complaint, establish a bus idle of at least 10 minutes on the vehicle. Lock the vehicle and place the driver's key outside the reception area of the vehicle.

Installation Position:

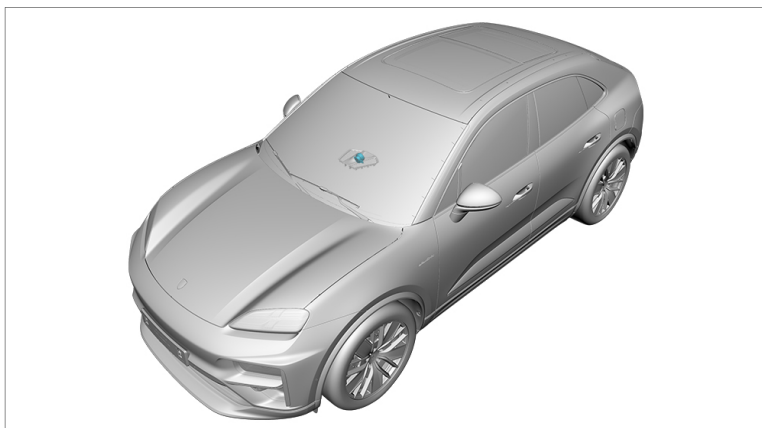

Stopwatch installation position

Important Notice: Technical Bulletins issued by Porsche Cars North America, Inc. are intended only for use by professional automotive technicians who have attended Porsche service training courses. They are written to inform those technicians of conditions that may occur on some Porsche vehicles, or to provide information that could assist in the proper servicing of a vehicle. Porsche special tools may be necessary in order to perform certain operations identified in these bulletins. Use of tools and procedures other than those Porsche recommends in these bulletins may be detrimental to the safe operation of your vehicle, and may endanger the people working on it. Properly trained Porsche technicians have the equipment, tools, safety instructions, and know-how to do the job properly and safely. Part numbers listed in these bulletins are for reference only. The work procedures updated electronically in the Porsche PIWIS diagnostic and testing device take precedence and, in the event of a discrepancy, the work procedures in the PIWIS Tester are the ones that must be followed.

© 2026 Porsche Cars North America, Inc.