



PARTS FLASH

REFERENCE NO.: RF-26-04

DATE: 09/29/2026

APPLICABLE MODEL(S): 2024-2026 CX-90 and 2025-2026 CX-70

SUBJECT: ORDERING REQUIREMENT FOR AT COMPONENTS FOR H3T (INLINE 6)

Use this guide before ordering or replacing an AT component on applicable H3T vehicles.

QUICK CHECKLIST BEFORE ORDERING

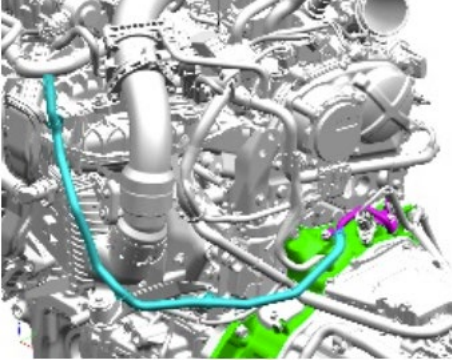
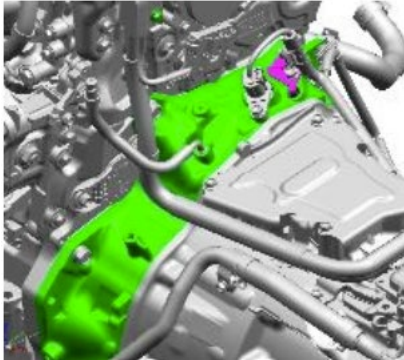
- Confirm the vehicle is a CX-90 (KK) or CX-70 (KJ) with H3T and is within the applicable market coverage.
- In GEPC, identify the AT component part number for the vehicle.
- Use the GEPC lookup tables below to determine whether the vehicle requires Table A or Table B parts.
- Order the complete set of parts listed in the applicable table. DO NOT order the AT component by itself.
- Check whether water hose removal is required for that GEPC part number.
- Follow the applicable WSM repair procedure for AT component removal/installation, water hose removal, and oil hose/oil pipe installation in MGSS.

IMPORTANT: If only the AT component is ordered, required replacement parts will be missing, and the repair cannot be completed.

DESIGN CHANGE DETAILS

1. Water hose discontinuation

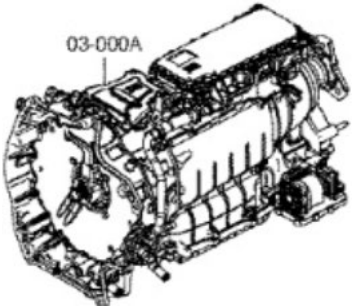
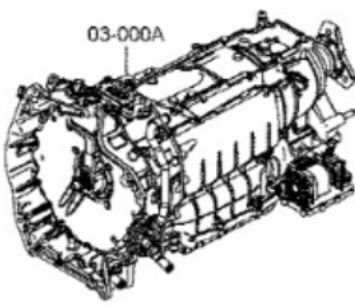
Early production vehicles were equipped with a water hose that was later discontinued. When replacing the AT component on vehicles that require water hose removal, remove the water hose. Current service AT components do not include a provision for water hose installation, and the hose does not need to be reinstalled.

	
Prior to water hose discontinuation (water hose shown in purple)	After water hose discontinuation (harness bracket shown in purple)

2. Inverter is not included with the service AT component

The inverter is reused and is not included with service AT components. Before ordering, check the AT component part number in GEPC and use Table A or Table B to order all required parts together.

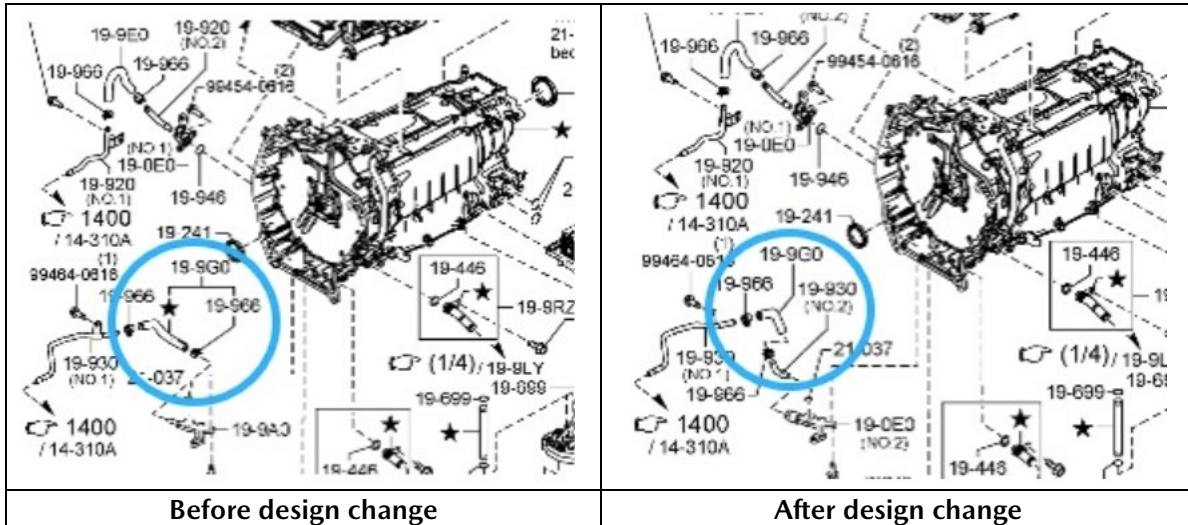
IMPORTANT: If DTCs for inverter are present or WSM indicates inverter replacement is needed, order inverter separately.

	
AT component with inverter	Service AT component without inverter

3. Oil hose and oil pipe design change

The oil hose and oil pipe were redesigned and are not interchangeable with previous-design parts. When replacing the AT component, the oil hose and oil pipe must be replaced together with the AT component.

IMPORTANT: If the oil hose and oil pipe are not ordered, the repair cannot be completed.



GEPC LOOKUP: DETERMINE THE REQUIRED PARTS TABLE

GEPC Catalog AULW01: '24MY/'25MY CX-90 H3T

Parts Number On GEPC	List of Parts to be Ordered	Water Hose Removal	Spec./Notes
M3YH-03-000	Table A	Required	-
M3YH-03-000A	Table A	NOT Required	No Water Hose was installed at Mass Production
M3YL-03-000A	Table A	NOT Required	No Water Hose was installed at Mass Production
M3YJ-03-000	Table B	Required	-
M3YJ-03-000A	Table B	NOT Required	No Water Hose was installed at Mass Production
M3YM-03-000	Table B	Required	-
M3YM-03-000A	Table B	NOT Required	No Water Hose was installed at Mass Production

GEPC Catalog AULS01: '25MY CX-70 H3T

Parts Number On GEPC	List of Parts to be Ordered	Water Hose Removal	Spec./Notes
M3YP-03-000A	Table A	NOT Required	No Water Hose was installed at Mass Production
M3YL-03-000A	Table A		
M3Y7-03-000A	Table B		
M3YM-03-000A	Table B		

GEPC Catalog AULW02 & AULS02: '26MY CX-90 H3T & '26MY CX-70 H3T

Parts Number On GEPC	List of Parts to be Ordered	Water Hose Removal	Spec./Notes
M3YL-03-000A	Table A	NOT Required	No Water Hose was installed at Mass Production
M3YM-03-000A	Table B		

PARTS TO ORDER

PARTS DEPARTMENT ACTION: Order every line in the applicable table. The AT components, oil hose, oil pipe, and inverter installation gaskets are all required for the repair.

NOTE:

- DO NOT order the AT component alone.
- Reuse the inverter but order the required installation gaskets.
- Order the oil hose and oil pipe with the AT component because previous-design parts are not compatible.
- Remove the water hose only when the GEPC lookup table indicates removal is required.

Table A

Parts Number To Ordered	Description	Qty.	Notes
M3X3-03-000	A/T CPT.	1	For H3T Regular Gasoline
RZM5-19-9G1	HOSE, OIL	1	Due to non-interchangeability
RZM5-19-931	PIPE, OIL	1	Due to non-interchangeability
MR01-30-3A1	GASKET	1	[R], For inverter installation
MR01-30-3A2	GASKET	1	[R], For inverter installation
MR01-30-3A3	GASKET	1	[R], For inverter installation
MR01-30-3A4	GASKET	1	[R], For inverter installation

[R]: Replacement parts

Table B

Parts Number To Ordered	Description	Qty.	Notes
M3X4-03-000	A/T CPT.	1	For H3T Premium Gasoline
RZM5-19-9G1	HOSE, OIL	1	Due to non-interchangeability
RZM5-19-931	PIPE, OIL	1	Due to non-interchangeability
MR01-30-3A1	GASKET	1	[R], For inverter installation
MR01-30-3A2	GASKET	1	[R], For inverter installation
MR01-30-3A3	GASKET	1	[R], For inverter installation
MR01-30-3A4	GASKET	1	[R], For inverter installation

[R]: Replacement parts

REPAIR PROCEDURE REFERENCES

Repair Operation	WSM Reference / Note
AT component replacement when water hose removal is required	No WSM reference / the vehicle with the water hose, remove it when replacing the AT component.
Oil hose and oil pipe installation	The newly purchased AT component is equipped with a Type A oil pipe component, while the original AT component is equipped with a Type B oil pipe component. Type A  Type B  When installing the purchased oil hose and oil pipe, follow the instructions in the "Oil Pipe Component Installation Note" section of AUTOMATIC TRANSMISSION REMOVAL/INSTALLATION [MM8AX-EC].
Inverter gasket installation	INVERTER REMOVAL/INSTALLATION [H3T]