INFORMATION REDACTED
PURSUANT TO THE FREEDOM OF
INFORMATION ACT (FOIA), 5 U.S.C.
552(B)(6)

FD BY: FCA US LLC

[redacted]

EHICLE MADE IN: CANADA

[redacted]

DATE OF MFR (BUILT): 12–20 GVWR: 6300 LB / 2858 K
GAWR FRONT: 3200 LB / 1452 KG WITH GAWR REAR: 3200 LB /
17X7.0 RIMS 17X7.0
235/65R17 TIRES 235/65R17
AT 250 kPa / 36 PSI COLD AT 250 kPa / 36 PSI
TYPE: MPV PAINT: PW7 MDH: 121814

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.A. FEDERAL MOTOR V
STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN

ENERGY SECURITY AGENCY
ESA

RISK ANALYSIS PL

(RAP STICKER)

The Energy Security Agency has determined this vehicle presents a SERIOUS risk of electrical shock, electrocution, and/or fire.

LEVEL 3- RED

RECOMMENDATIONS

- KEEP VEHICLE 50 FEET FROM ALL EXPOSURES
- LIMIT VEHICLE'S MOVEMENT TO CRITICAL ONLY
- IF VEHICLE HAS BEEN SUBMERGED OR SPRAYED WITH WATER, POSITION THE VEHICLE SO WATER WILL DRAIN OUT OF THE HIGH VOLTAGE BATTERY
- MONITOR VEHICLE FOR SMOKE, FIRE, OR ARCHING
- DO NOT HANDLE HIGH VOLTAGE COMPONENTS

THIS VEHICLE REQUIRES A SECOND RISK ANALYSIS TO BE PERFORMED. CALL THE ESA 20-24 HOURS FROM THE TIME LISTED BELOW

1-855-ESA-SAFE OR 1-855-372-7233

[redacted]

8·31·23

DATE/TIME - RISK ANALYSIS #1

DATE/TIME - RISK ANALYSIS #2

PLACE THIS STICKER ON THE WINDSHIELD OR DRIVERS SIDE WINDOW. IF GLASS IS NOT PRESENT, PLACE ON FRONT DOOR OR HOOD.

HIGH VOLTAGE SHUTDOWN COMPLETE YES ☑ NO ☐

RISK ANALYSIS

LEVEL 3- RED

RECOMMENDATIONS

- KEEP VEHICLE 40 FEET FROM ALL EXPOSURES
- LIMIT VEHICLE'S MOVEMENT TO CRITICAL ONLY
- IF VEHICLE HAS BEEN SUBMERGED OR SPRAYED WITH WATER, POSITION THE VEHICLE SO WATER WILL DRAIN OUT OF THE HIGH VOLTAGE BATTERY
- MONITOR VEHICLE FOR SMOKE, FIRE, OR ARCHING
- DO NOT HANDLE HIGH VOLTAGE COMPONENTS

THIS VEHICLE REQUIRES A SECOND RISK ANALYSIS TO BE PERFORMED

372-7233

8-31-23

HIGH VOLTAGE SHUTDOWN COMPLETE YES NO

STEVENS CREE

CHRYSLER

Jeep

TEMPORARY IDENTIFICATION

fore delivery to the purchaser)

[redacted]

[redacted]

RY LICENSE PLATE NUMBER

92

DATE FIRST SOLD AS A NEW VEHICLE *(MM/DD/YYYY)*

01/27/2021

408-248-1800

MOPAR

AS

MADE IN CANADA

ACOUSTIC

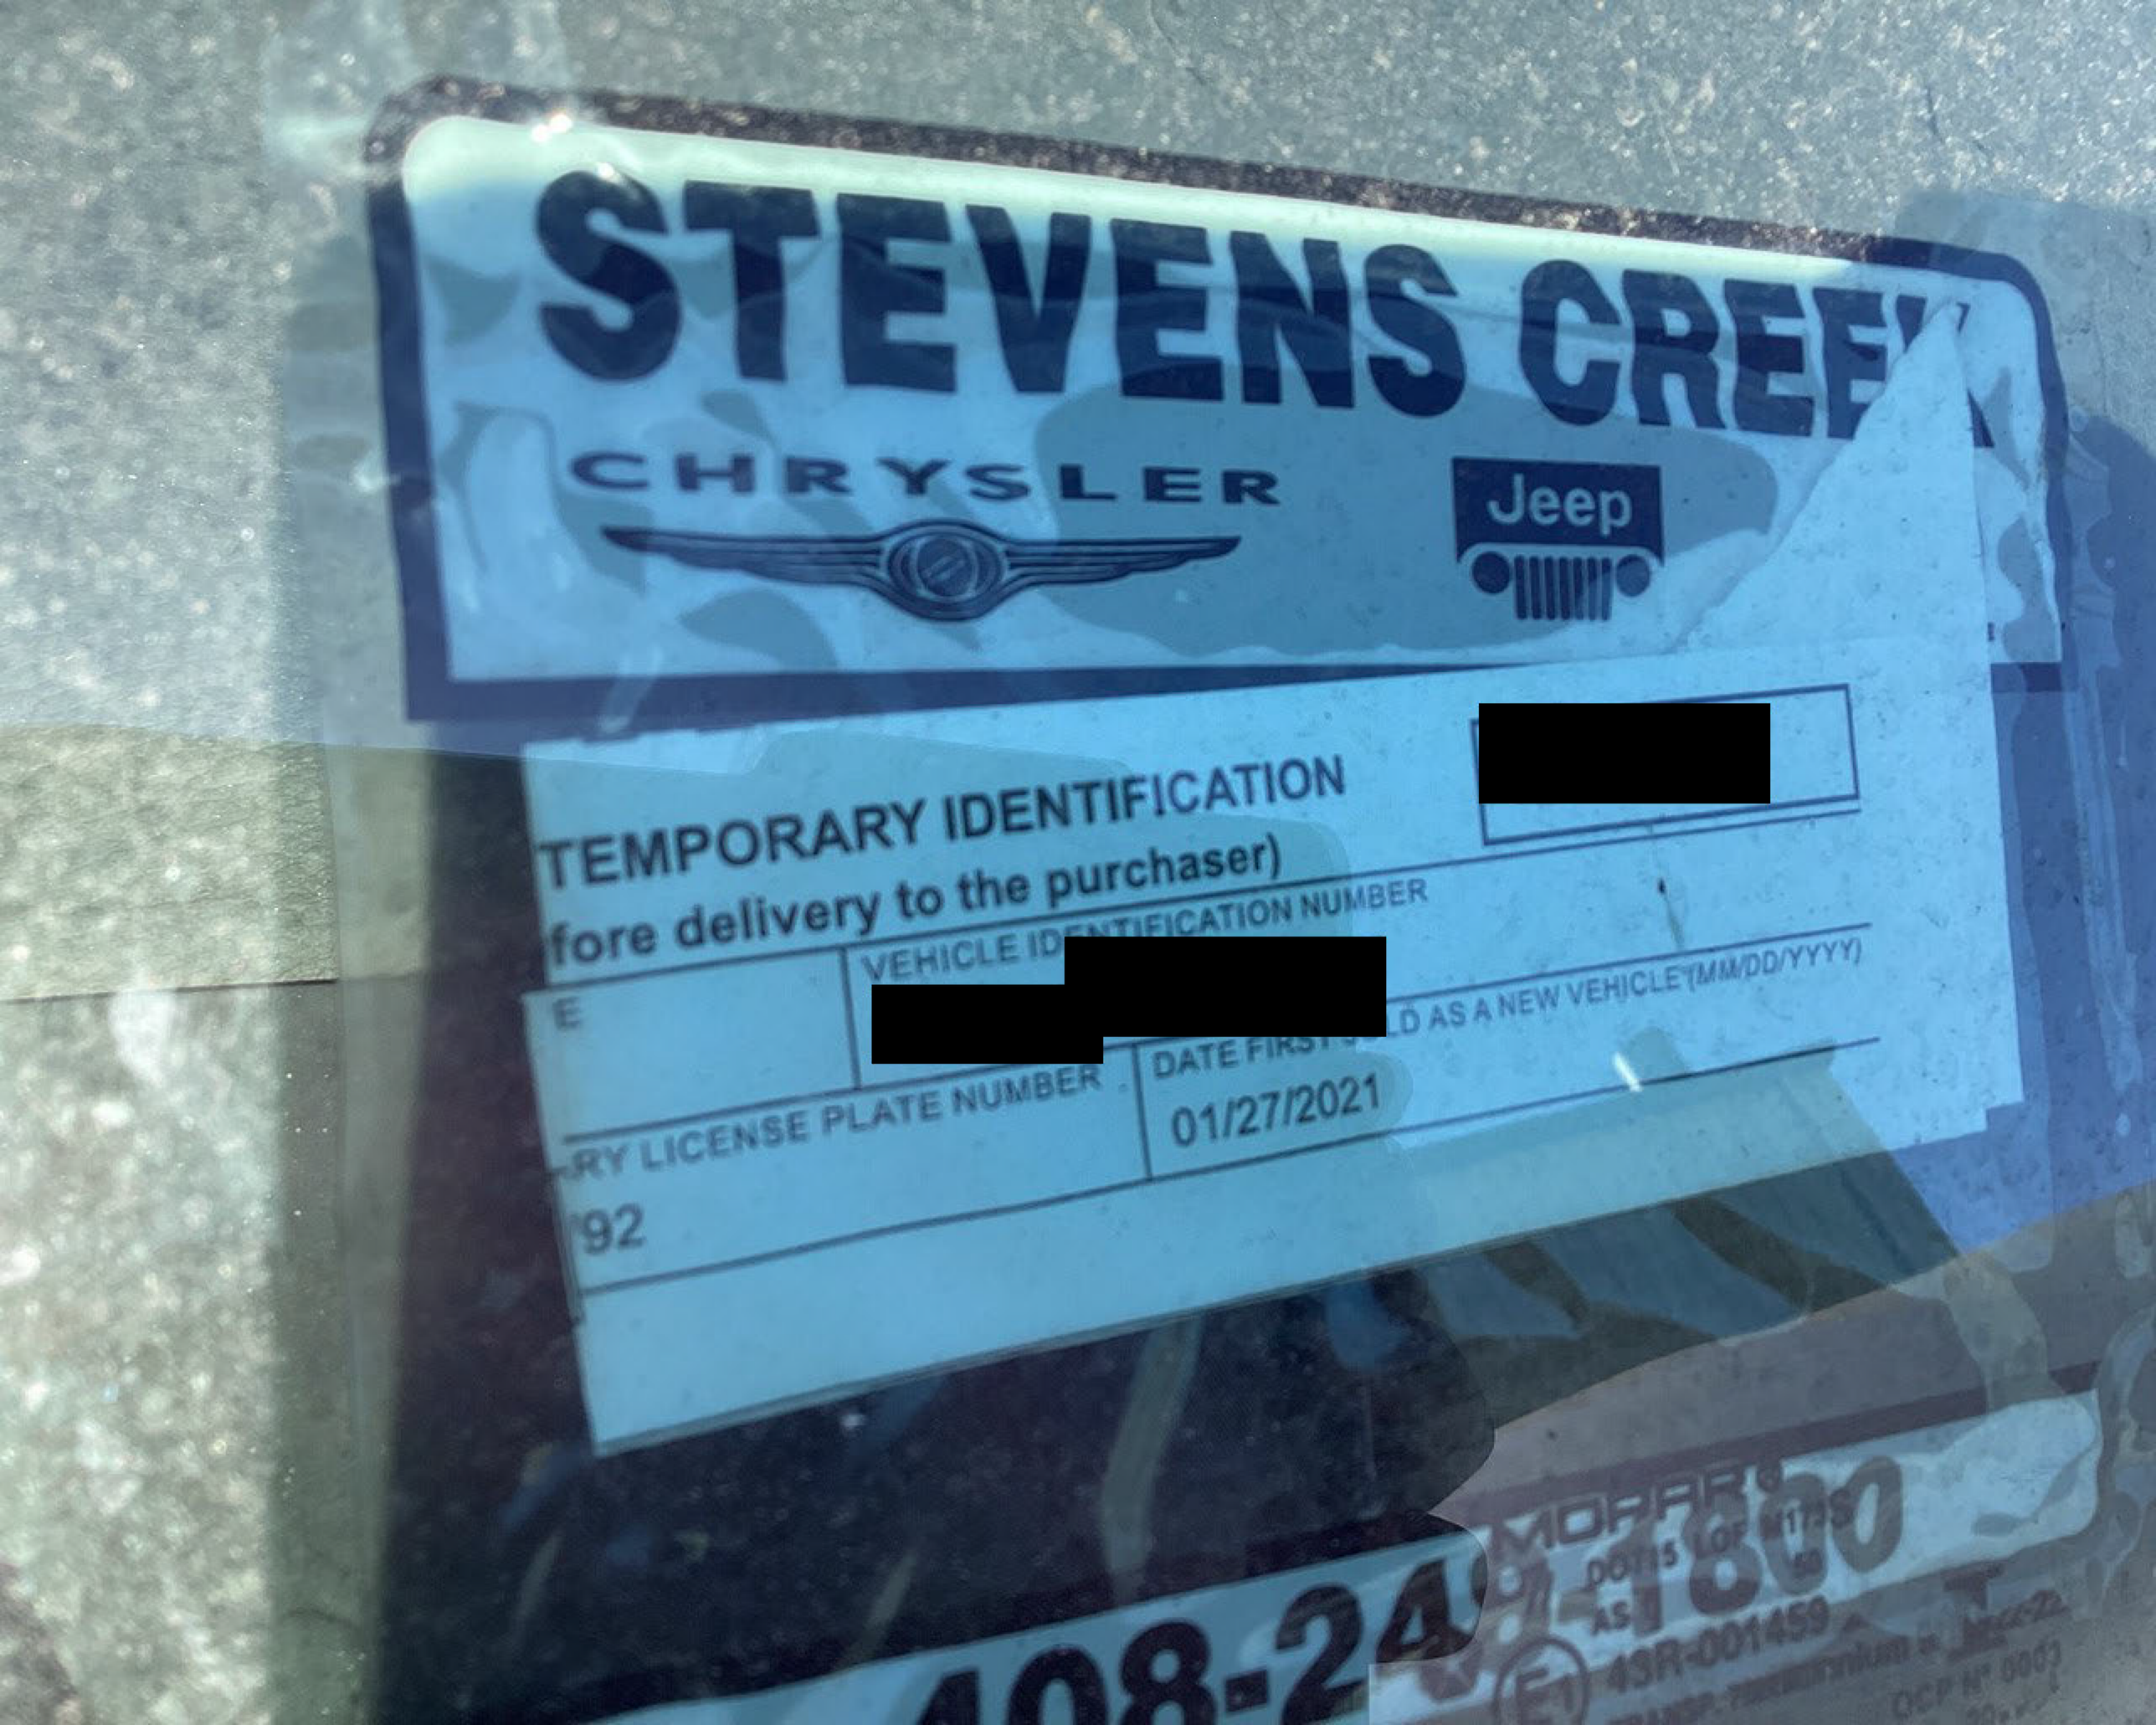
STEVENS CREE
CHRYSLER
Jeep
[redacted]
TEMPORARY IDENTIFICATION
fore delivery to the purchaser)
E
VEHICLE ID[redacted]TIFICATION NUMBER
[redacted]
LD AS A NEW VEHICLE (MM/DD/YYYY)
RY LICENSE PLATE NUMBER
DATE FIRS
01/27/2021
92
MOPAR
408-24
1800
43R-001459




HYBRID


HYBRID












HYBRID






PACIFICA
HYBRID


HYBRID
PACIFICA


HYBRID






HYBRID














WARNING
MISE EN GARDE






BYD






115 V AC
150 W




















VENTIS
MX4
INDUSTRIAL
SCIENTIFIC


BW
MX4


ENTIS
MX4
INDUSTRIAL
SCIENTIFIC











[redacted]

HYBRID

PACIFICA
































































INDUSTRIAL
SCIENTIFIC
VENTIS
MX4
PPM
%LEL
%VOL







































EXPRESS SERVICE

Use the link below to download our companion cell phone app to make service appointments from your cell phone.

SERVICEEXPRESS.US/PREMI[redacted]

Syn. 0w20
28750


WARNING
EVEN WITH ADVANCED AIRBAGS
CHILDREN CAN BE KILLED OR SERIOUSLY INJURED BY
THE AIRBAG.
THE BACK SEAT IS THE SAFEST PLACE FOR CHILDREN.
NEVER PUT A REAR-FACING CHILD SEAT IN THE FRONT.
ALWAYS USE SEATBELTS AND CHILD RESTRAINTS.
SEE OWNER'S MANUAL FOR MORE INFORMATION ABOUT
AIRBAGS.
05108 114A
MISE EN GARDE
MÊME AVEC DES SACS GONFLABLES PERFECTIONNÉS
LES ENFANTS PEUVENT ÊTRE TUÉS OU GRAVEMENT BLESSÉS PAR
UN SAC GONFLABLE.
LA MEILLEURE PLACE POUR LES ENFANTS EST LA PLACE ARRIÈRE.
NE JAMAIS PLACER UN SIÈGE POUR BÉBÉ ORIENTÉ VERS
L'ARRIÈRE À L'AVANT DU VÉHICULE.
TOUJOURS UTILISER LES CEINTURES ET LES SYSTÈMES
DE RETENUE POUR ENFANT.
CONSULTER LE GUIDE DU PROPRIÉTAIRE POUR PLUS
DE RENSEIGNEMENTS SUR LES SACS GONFLABLES.










































































HYBRID


HYBRID


HYBRID


HYBRID




3900






HYBRID
ENGINE OIL
SAE 0W-20
DAT COOLANT


HYBRID



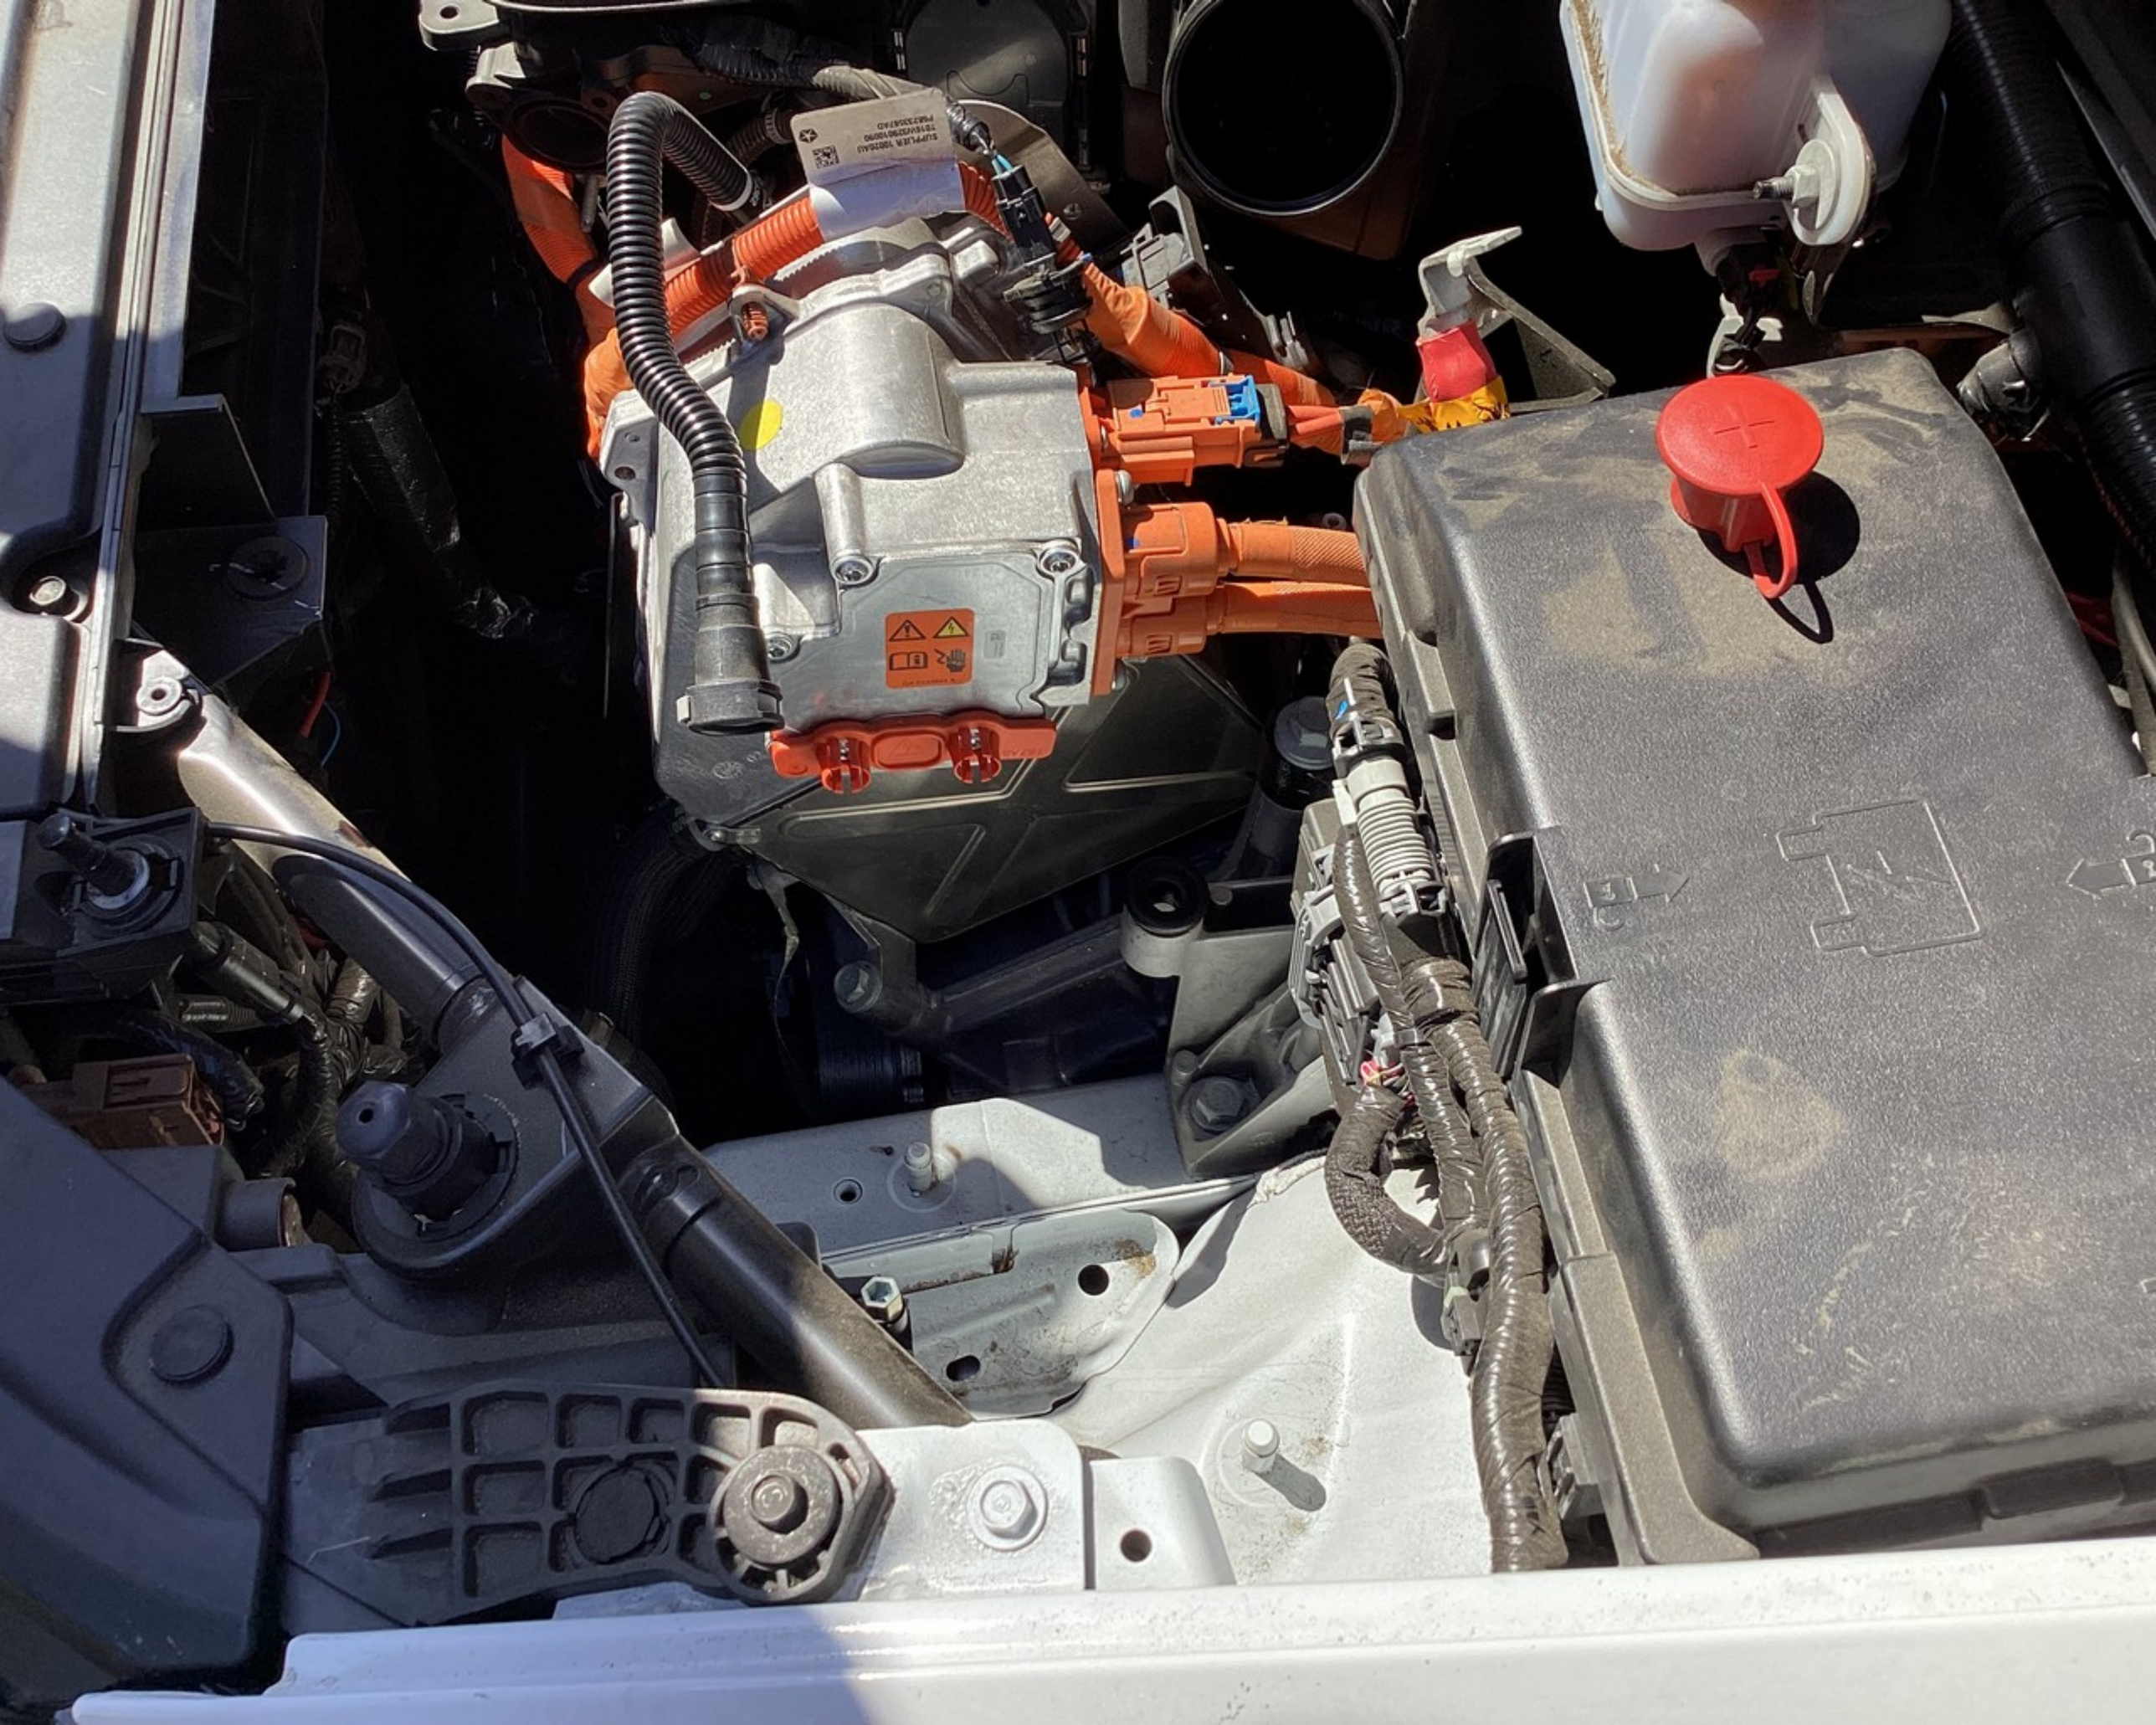


OA 0144844 A

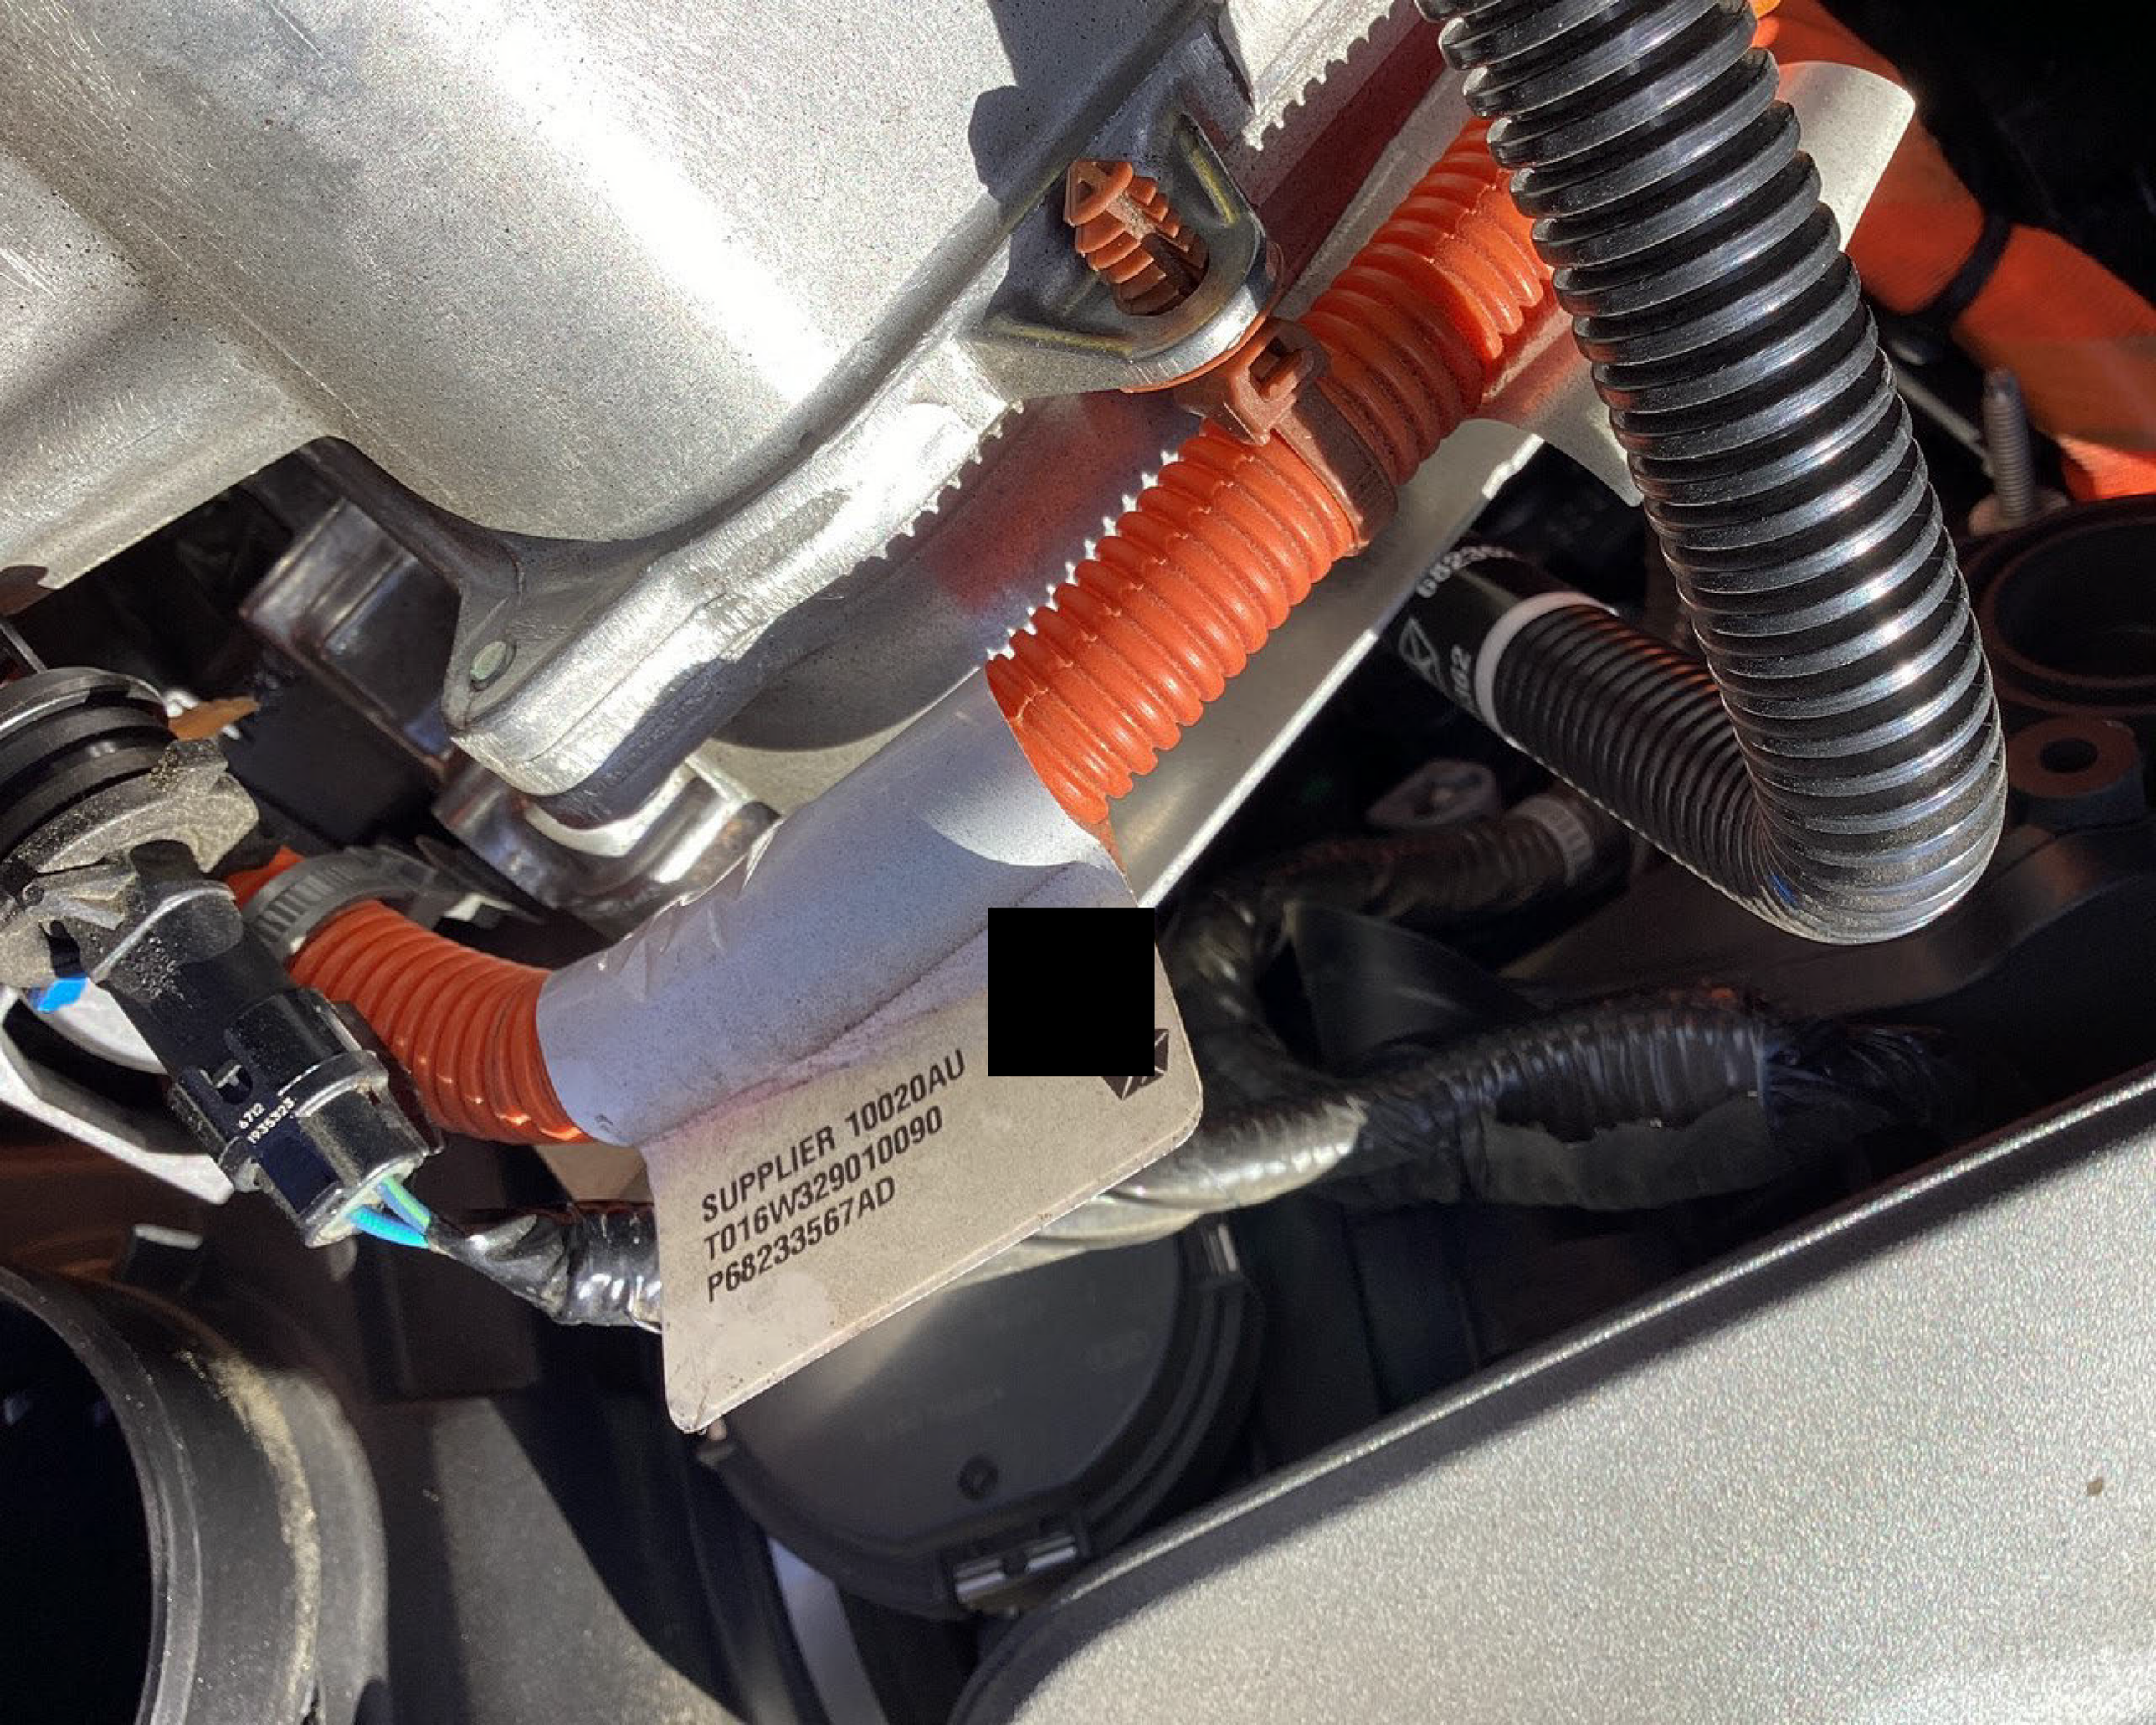
SUPPLIER 10020AU
T016W329010090
P68233567AD

SCRAP IF DROPPED

[redacted]

MAGNETI MARELLI

TMMVL2410A0021

P05185115AF

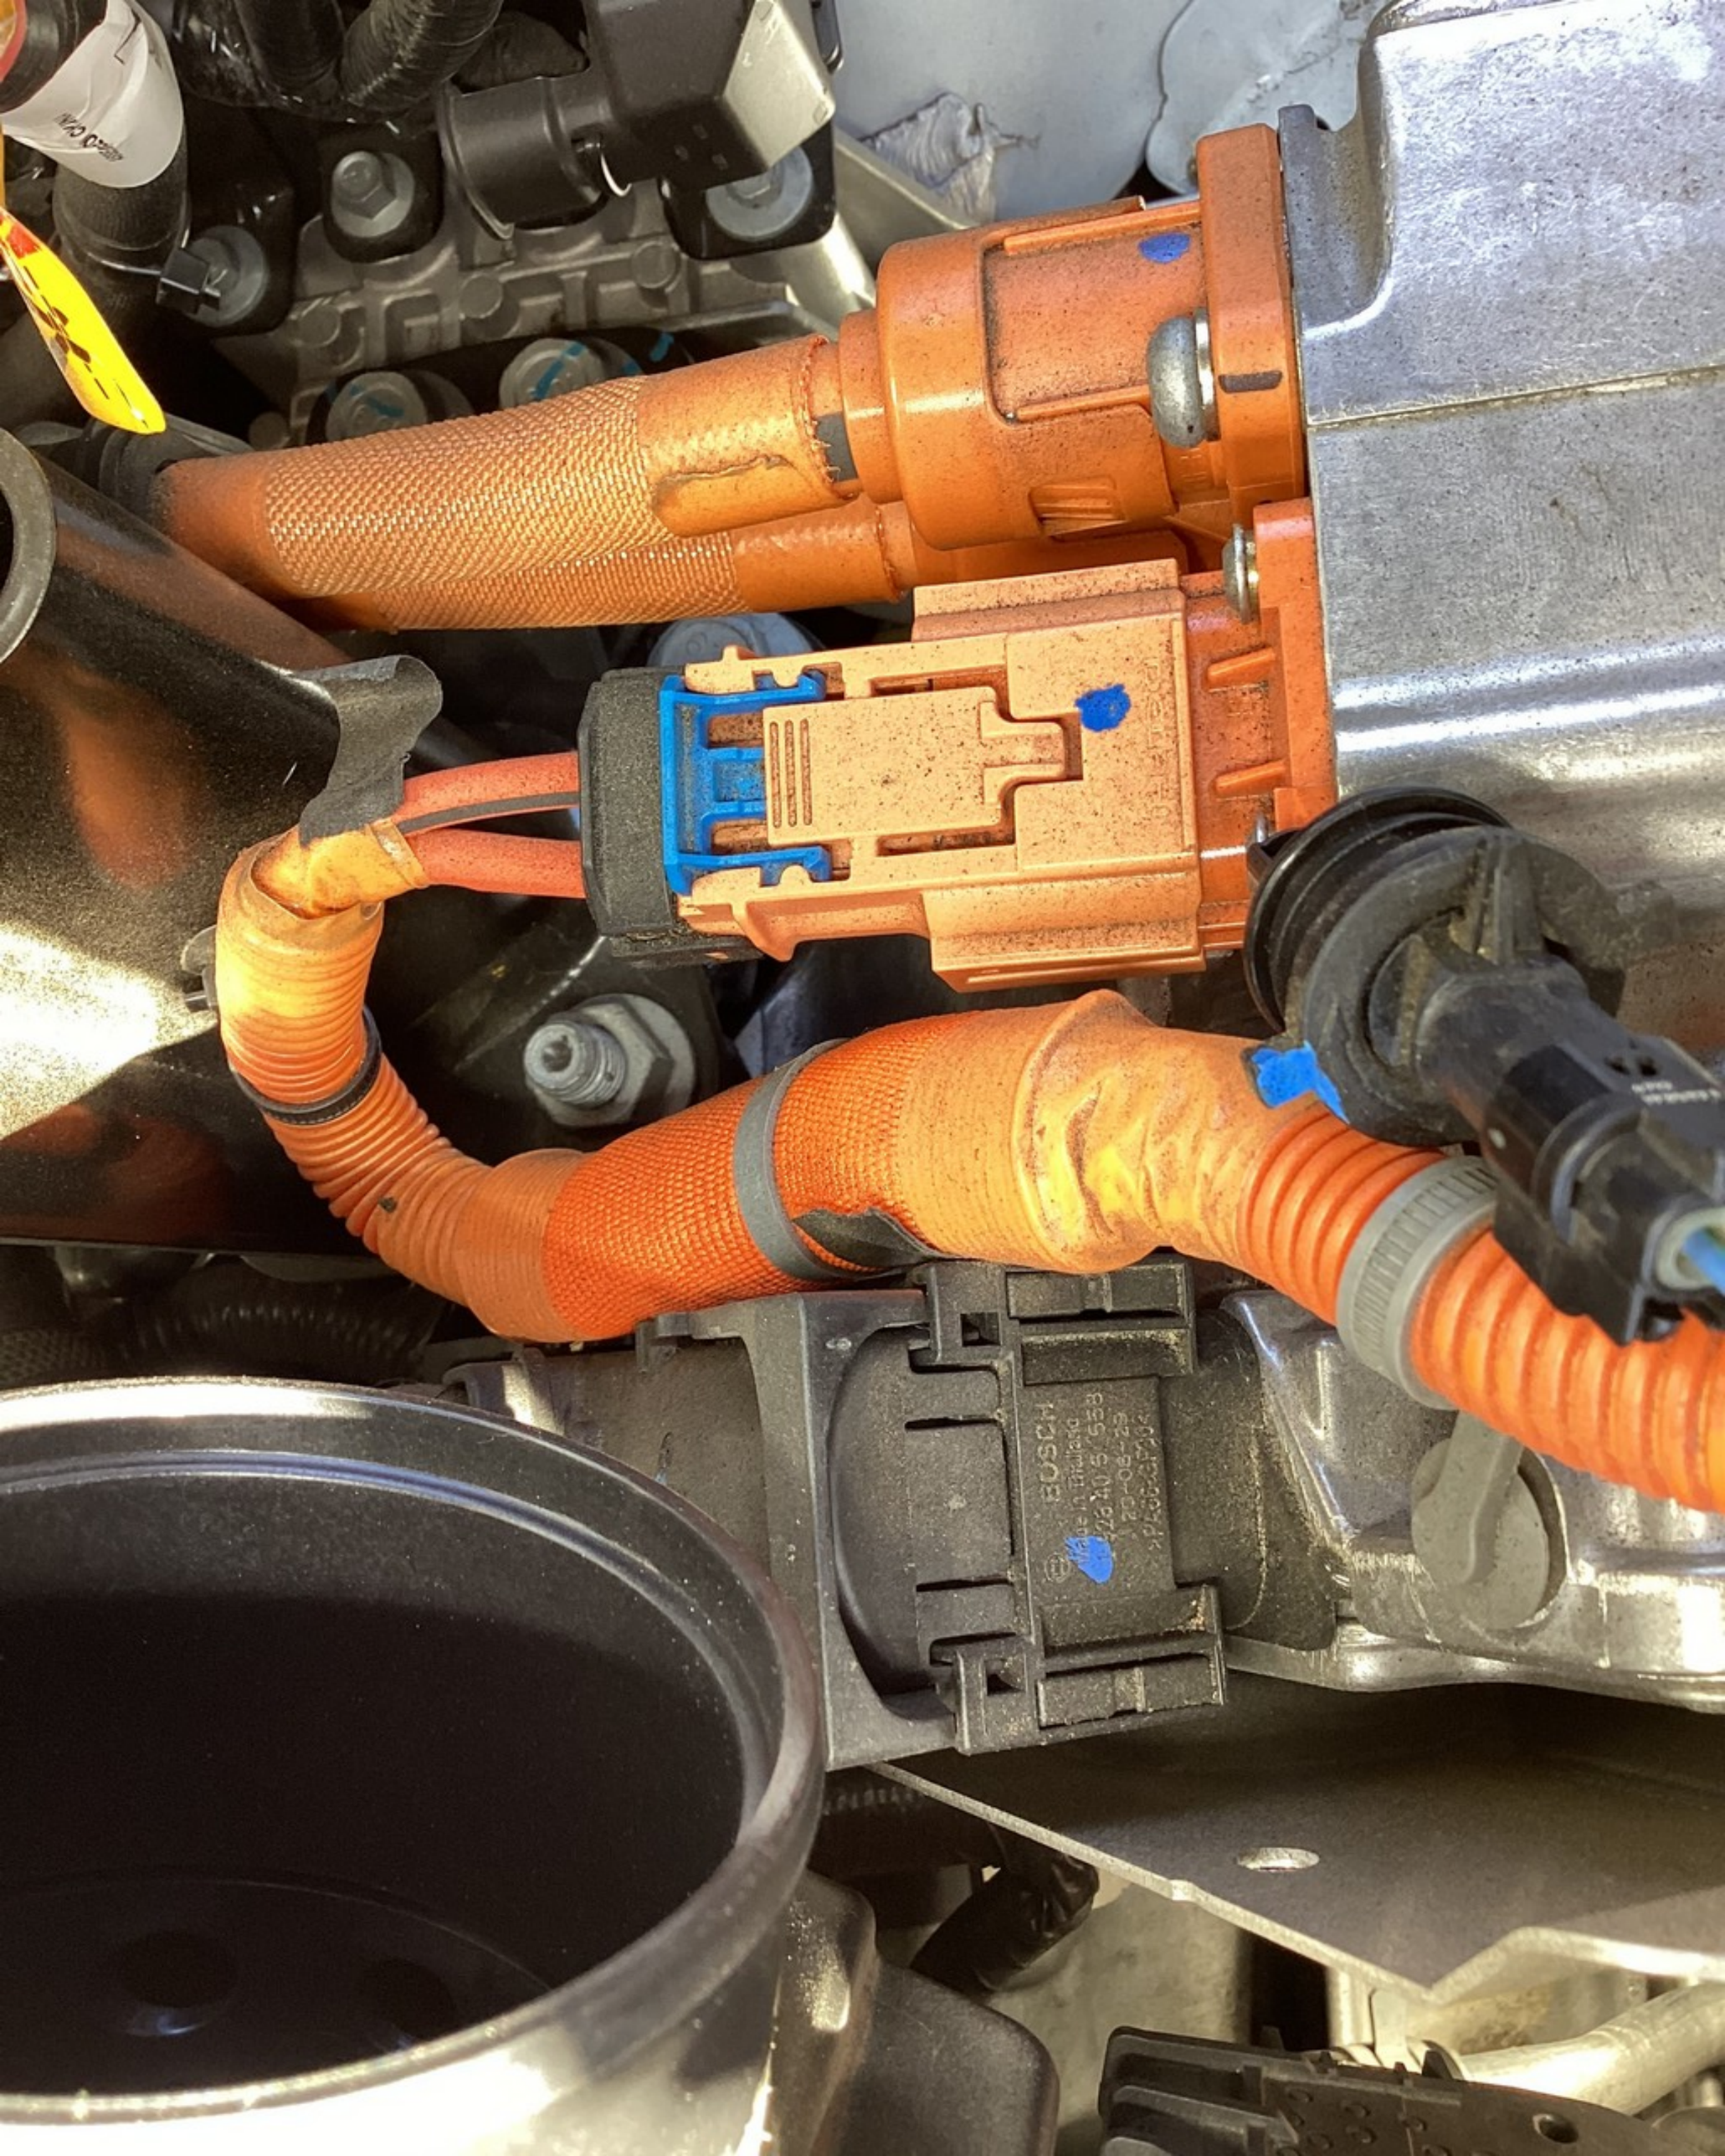
BOSCH

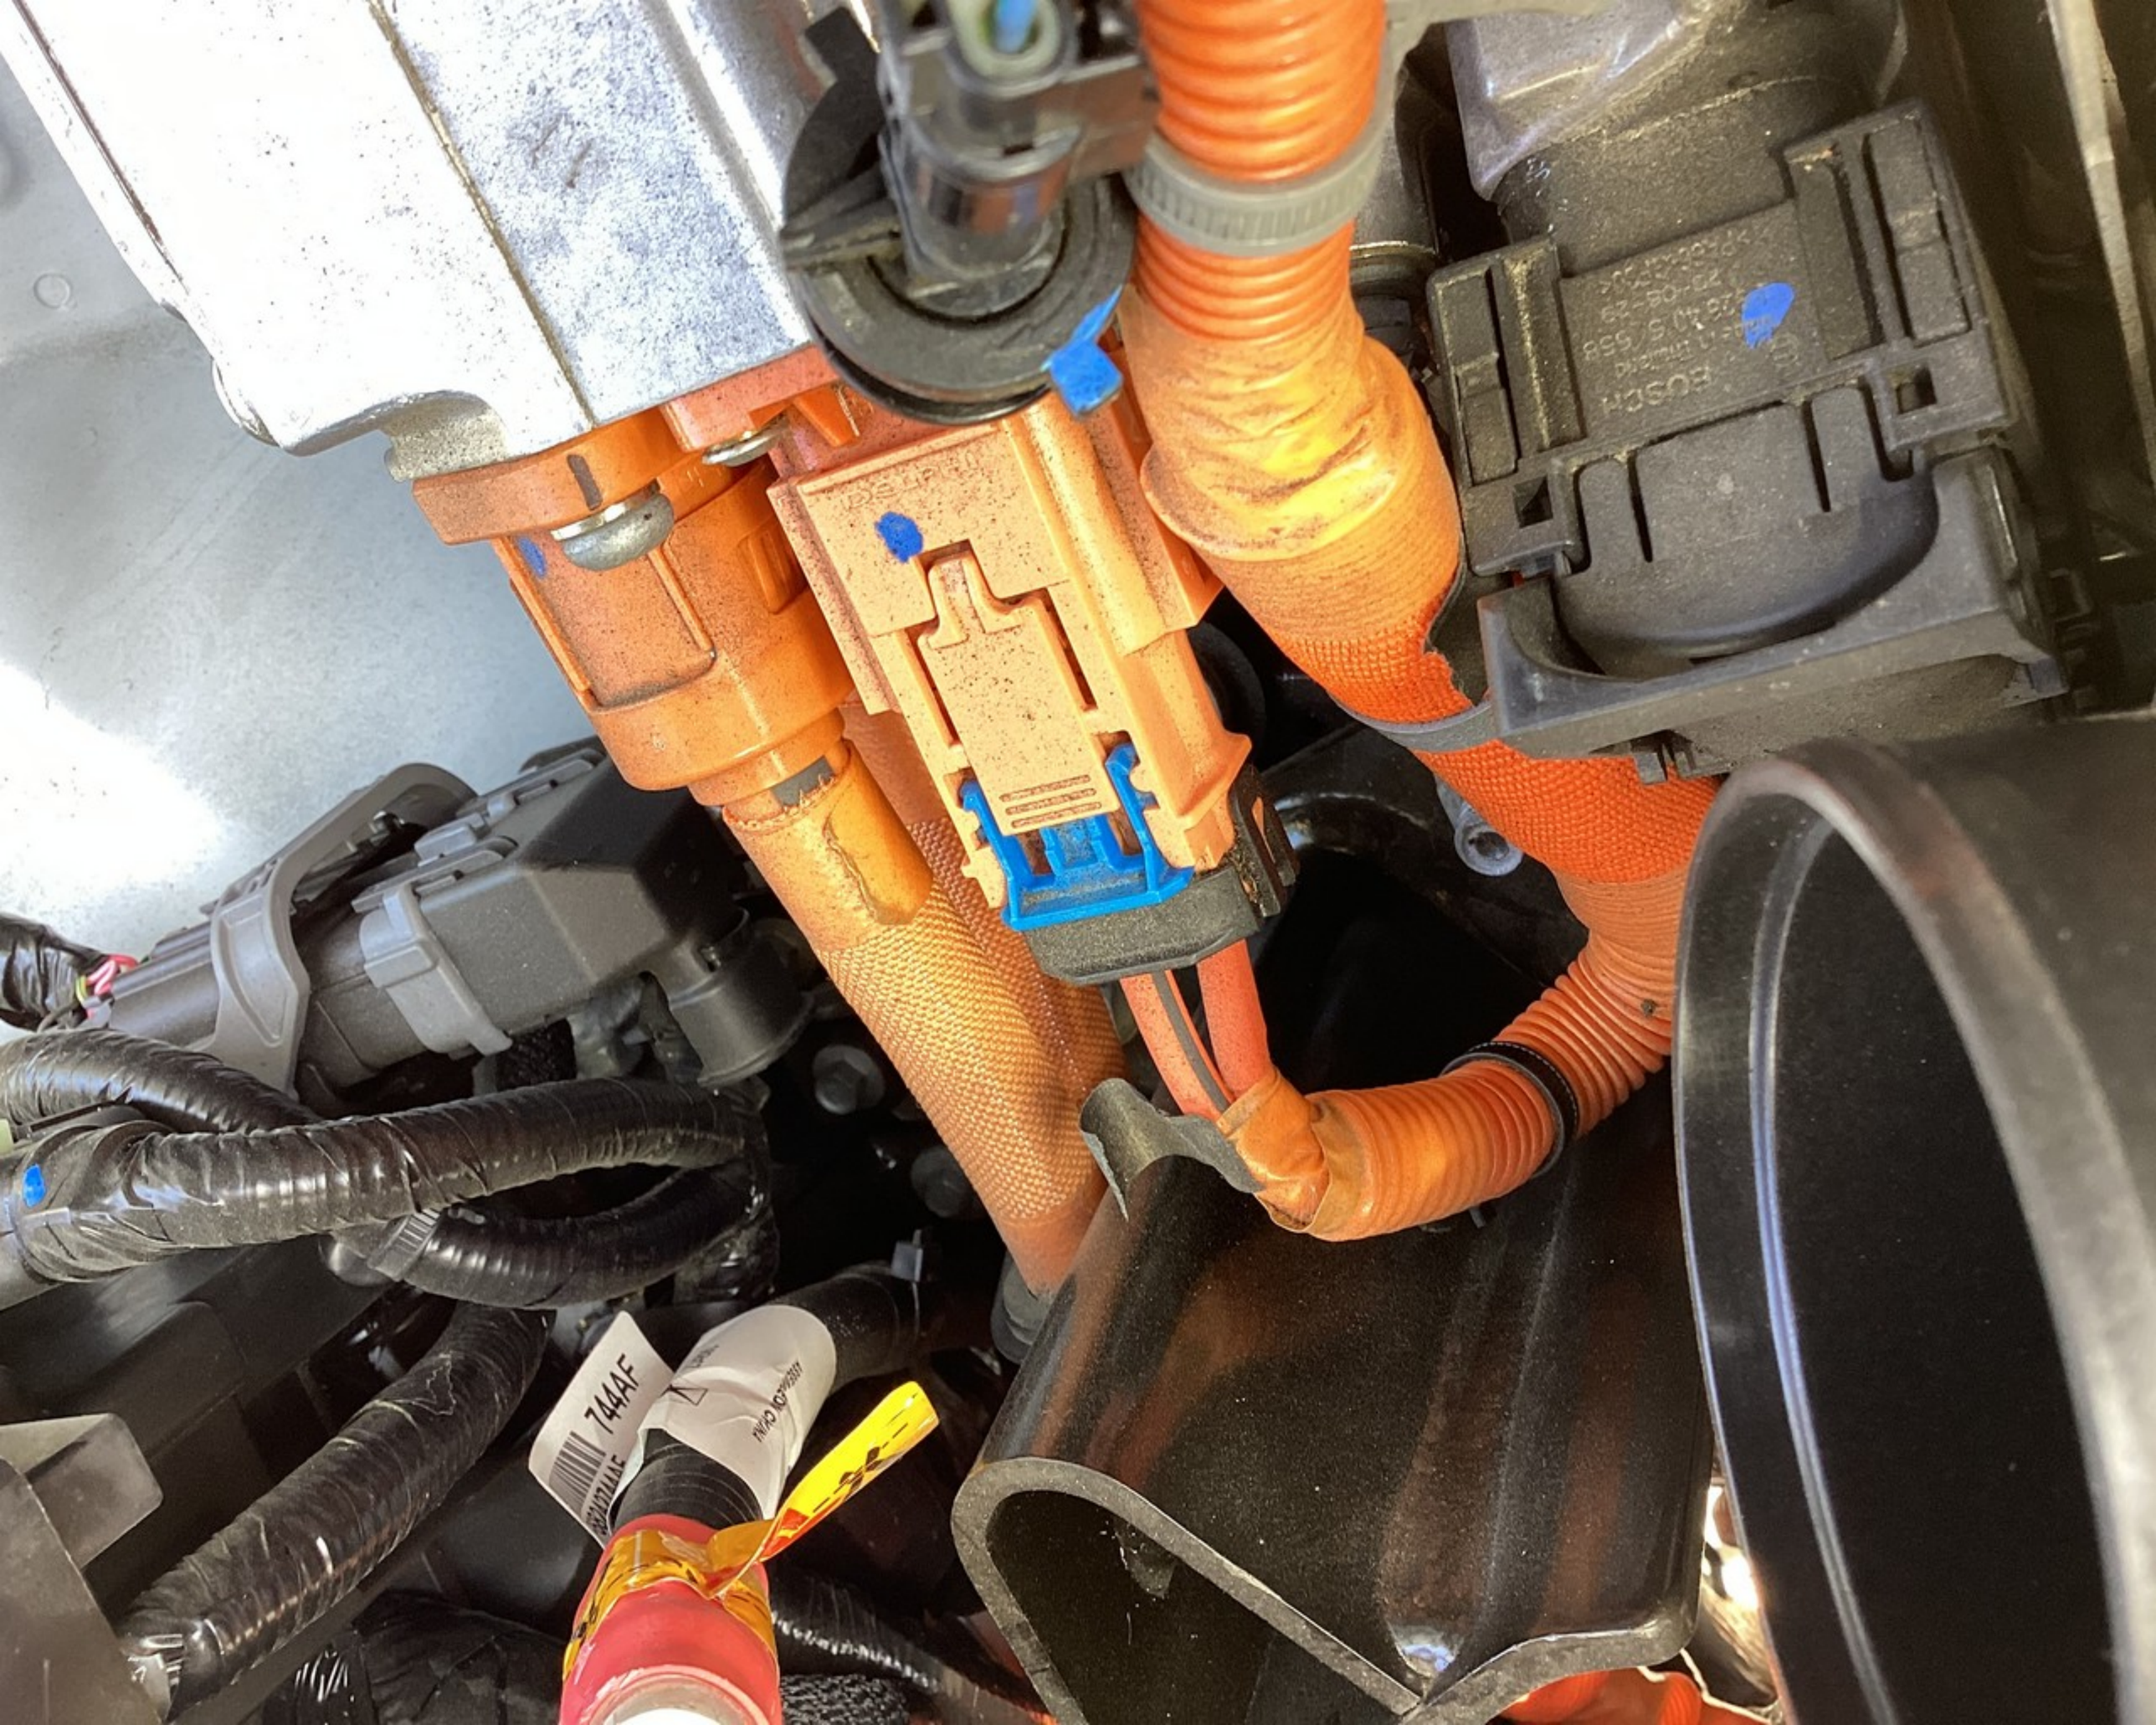
744AF



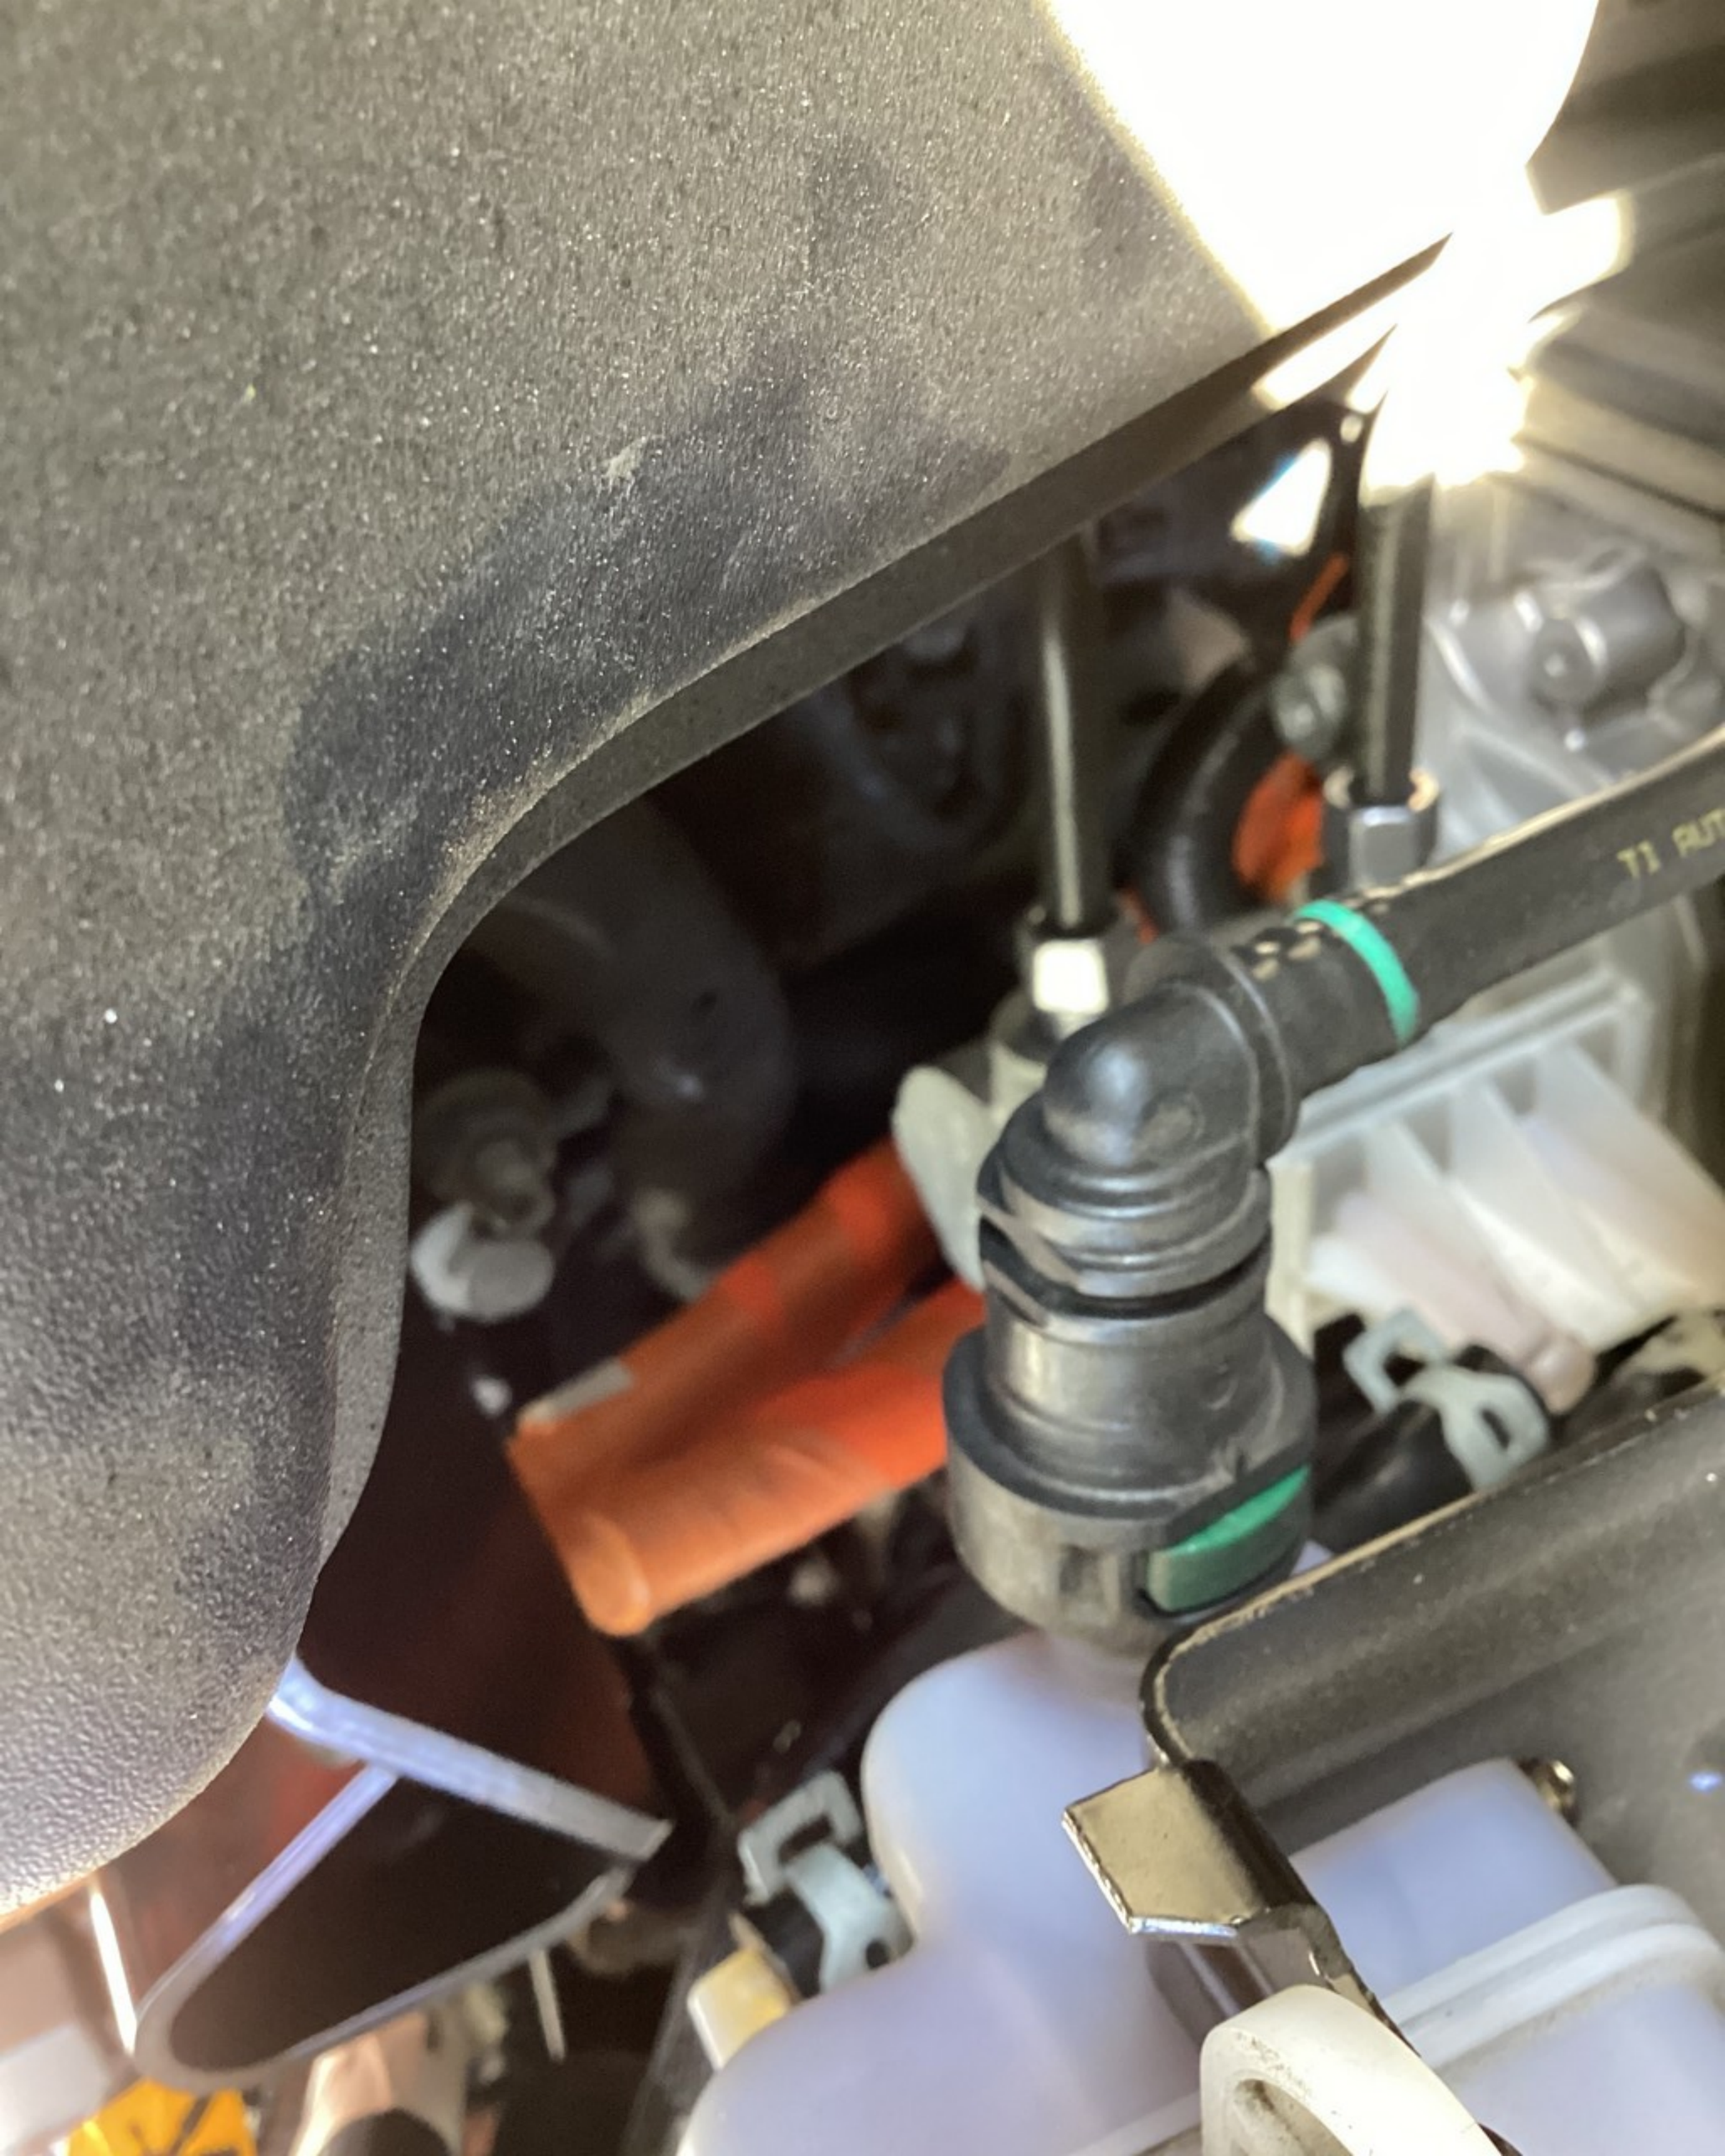




5810-0807
0807
6356-5509
REV.001

6356-5509
UB1 B REV.001
>PP+20T+10GF<




SAE 0W-20
68272801AA
5 PSI
34.5 kPa
OAT COOLANT
MS-12106


5 PSI
34.5 kPa
OAT COOLANT
MS-12106


BTL IN
OAT COOLANT
MS-12106
5 PSI
34.5 kPa
68272801AA
68249655AD
ENGINE OIL

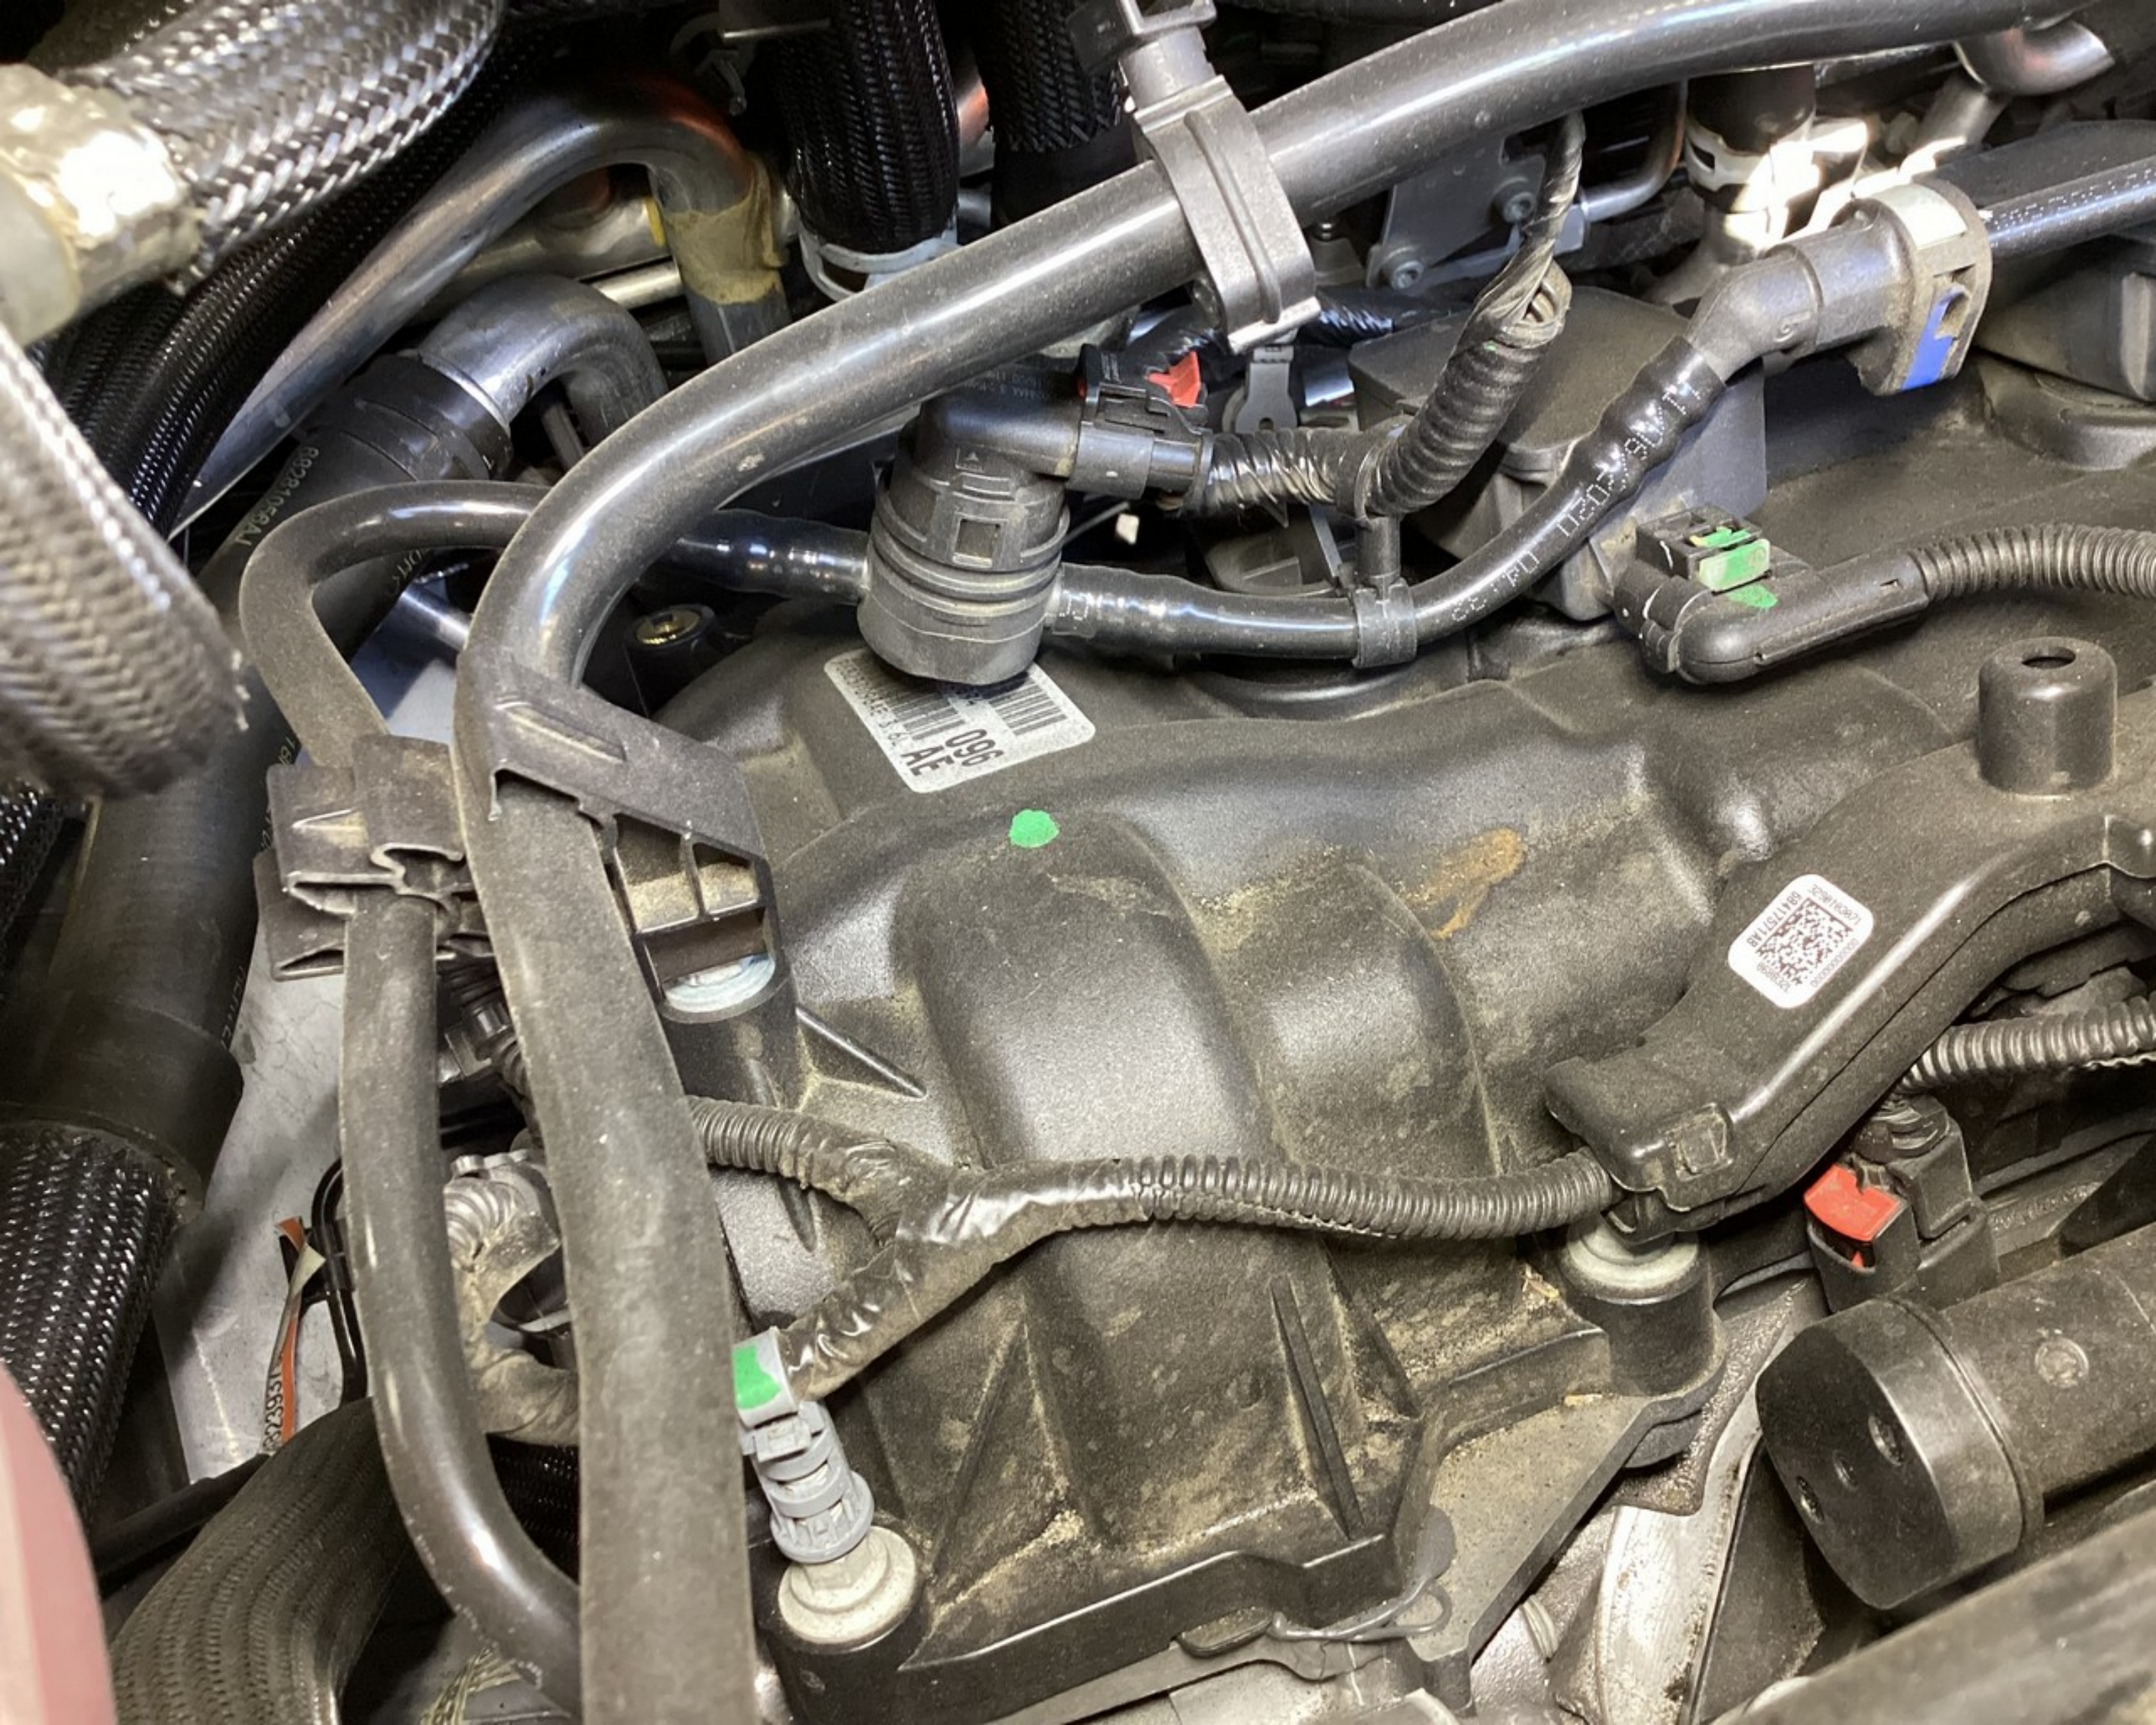

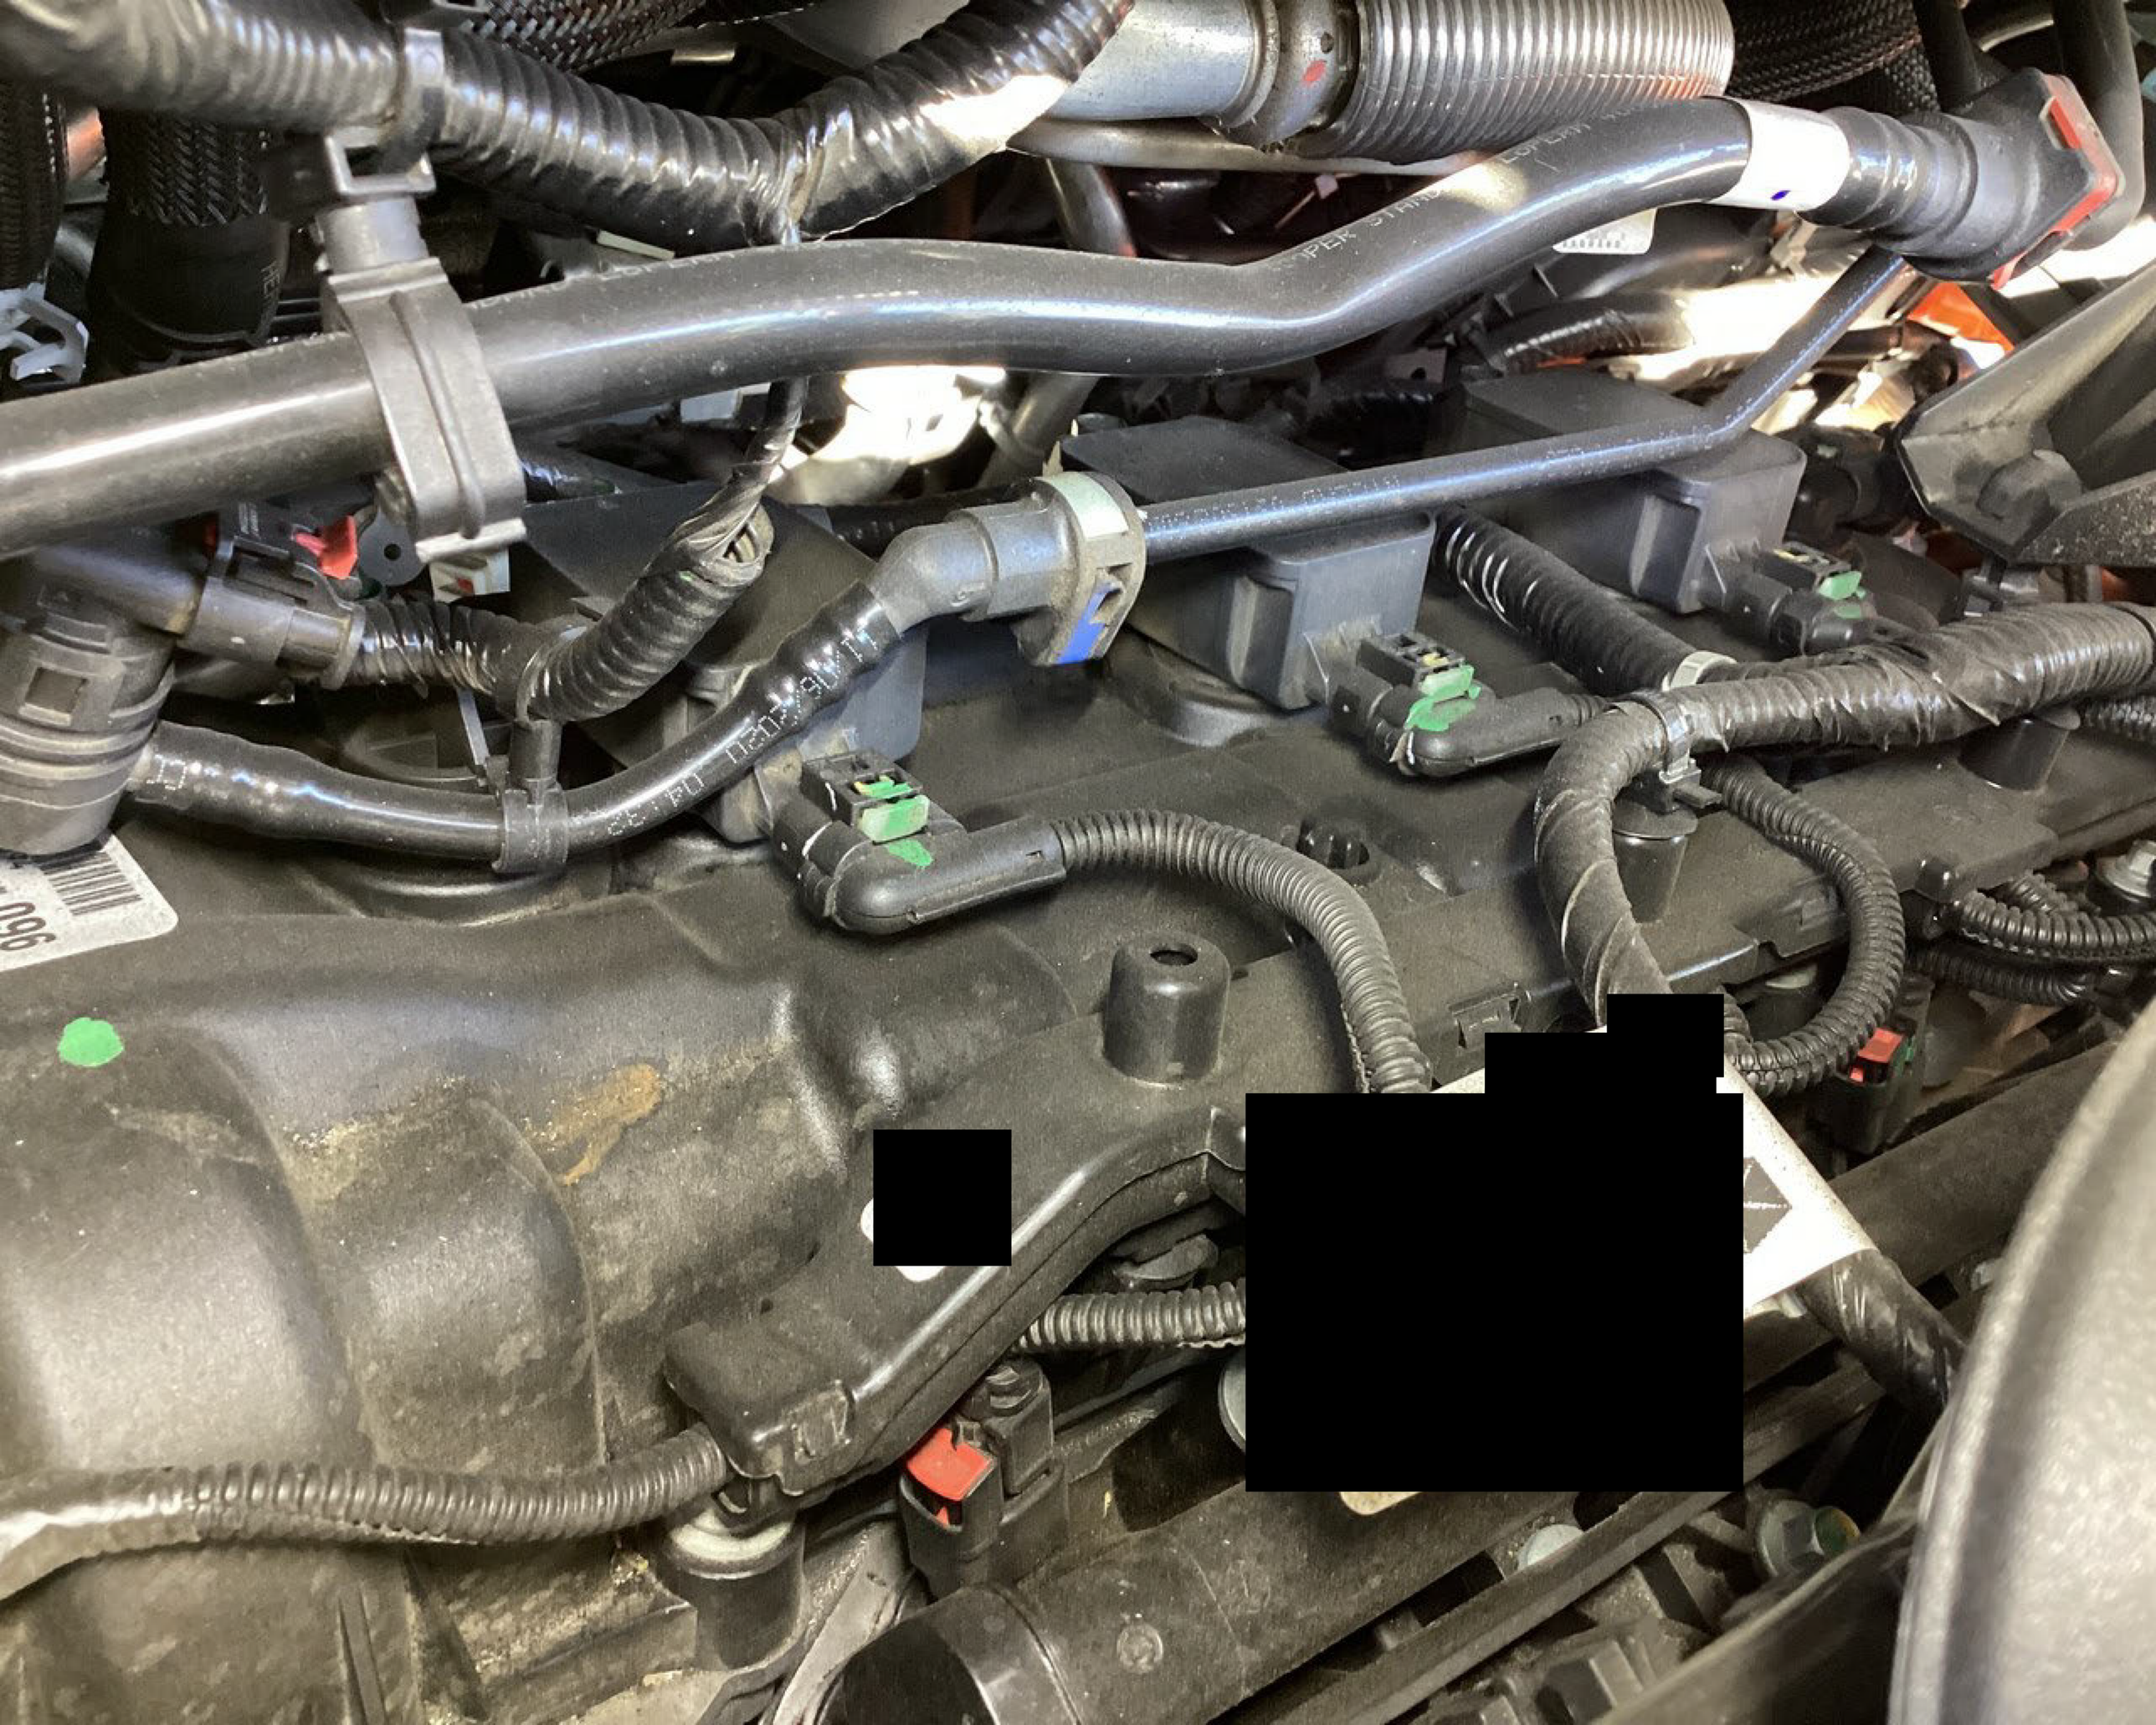

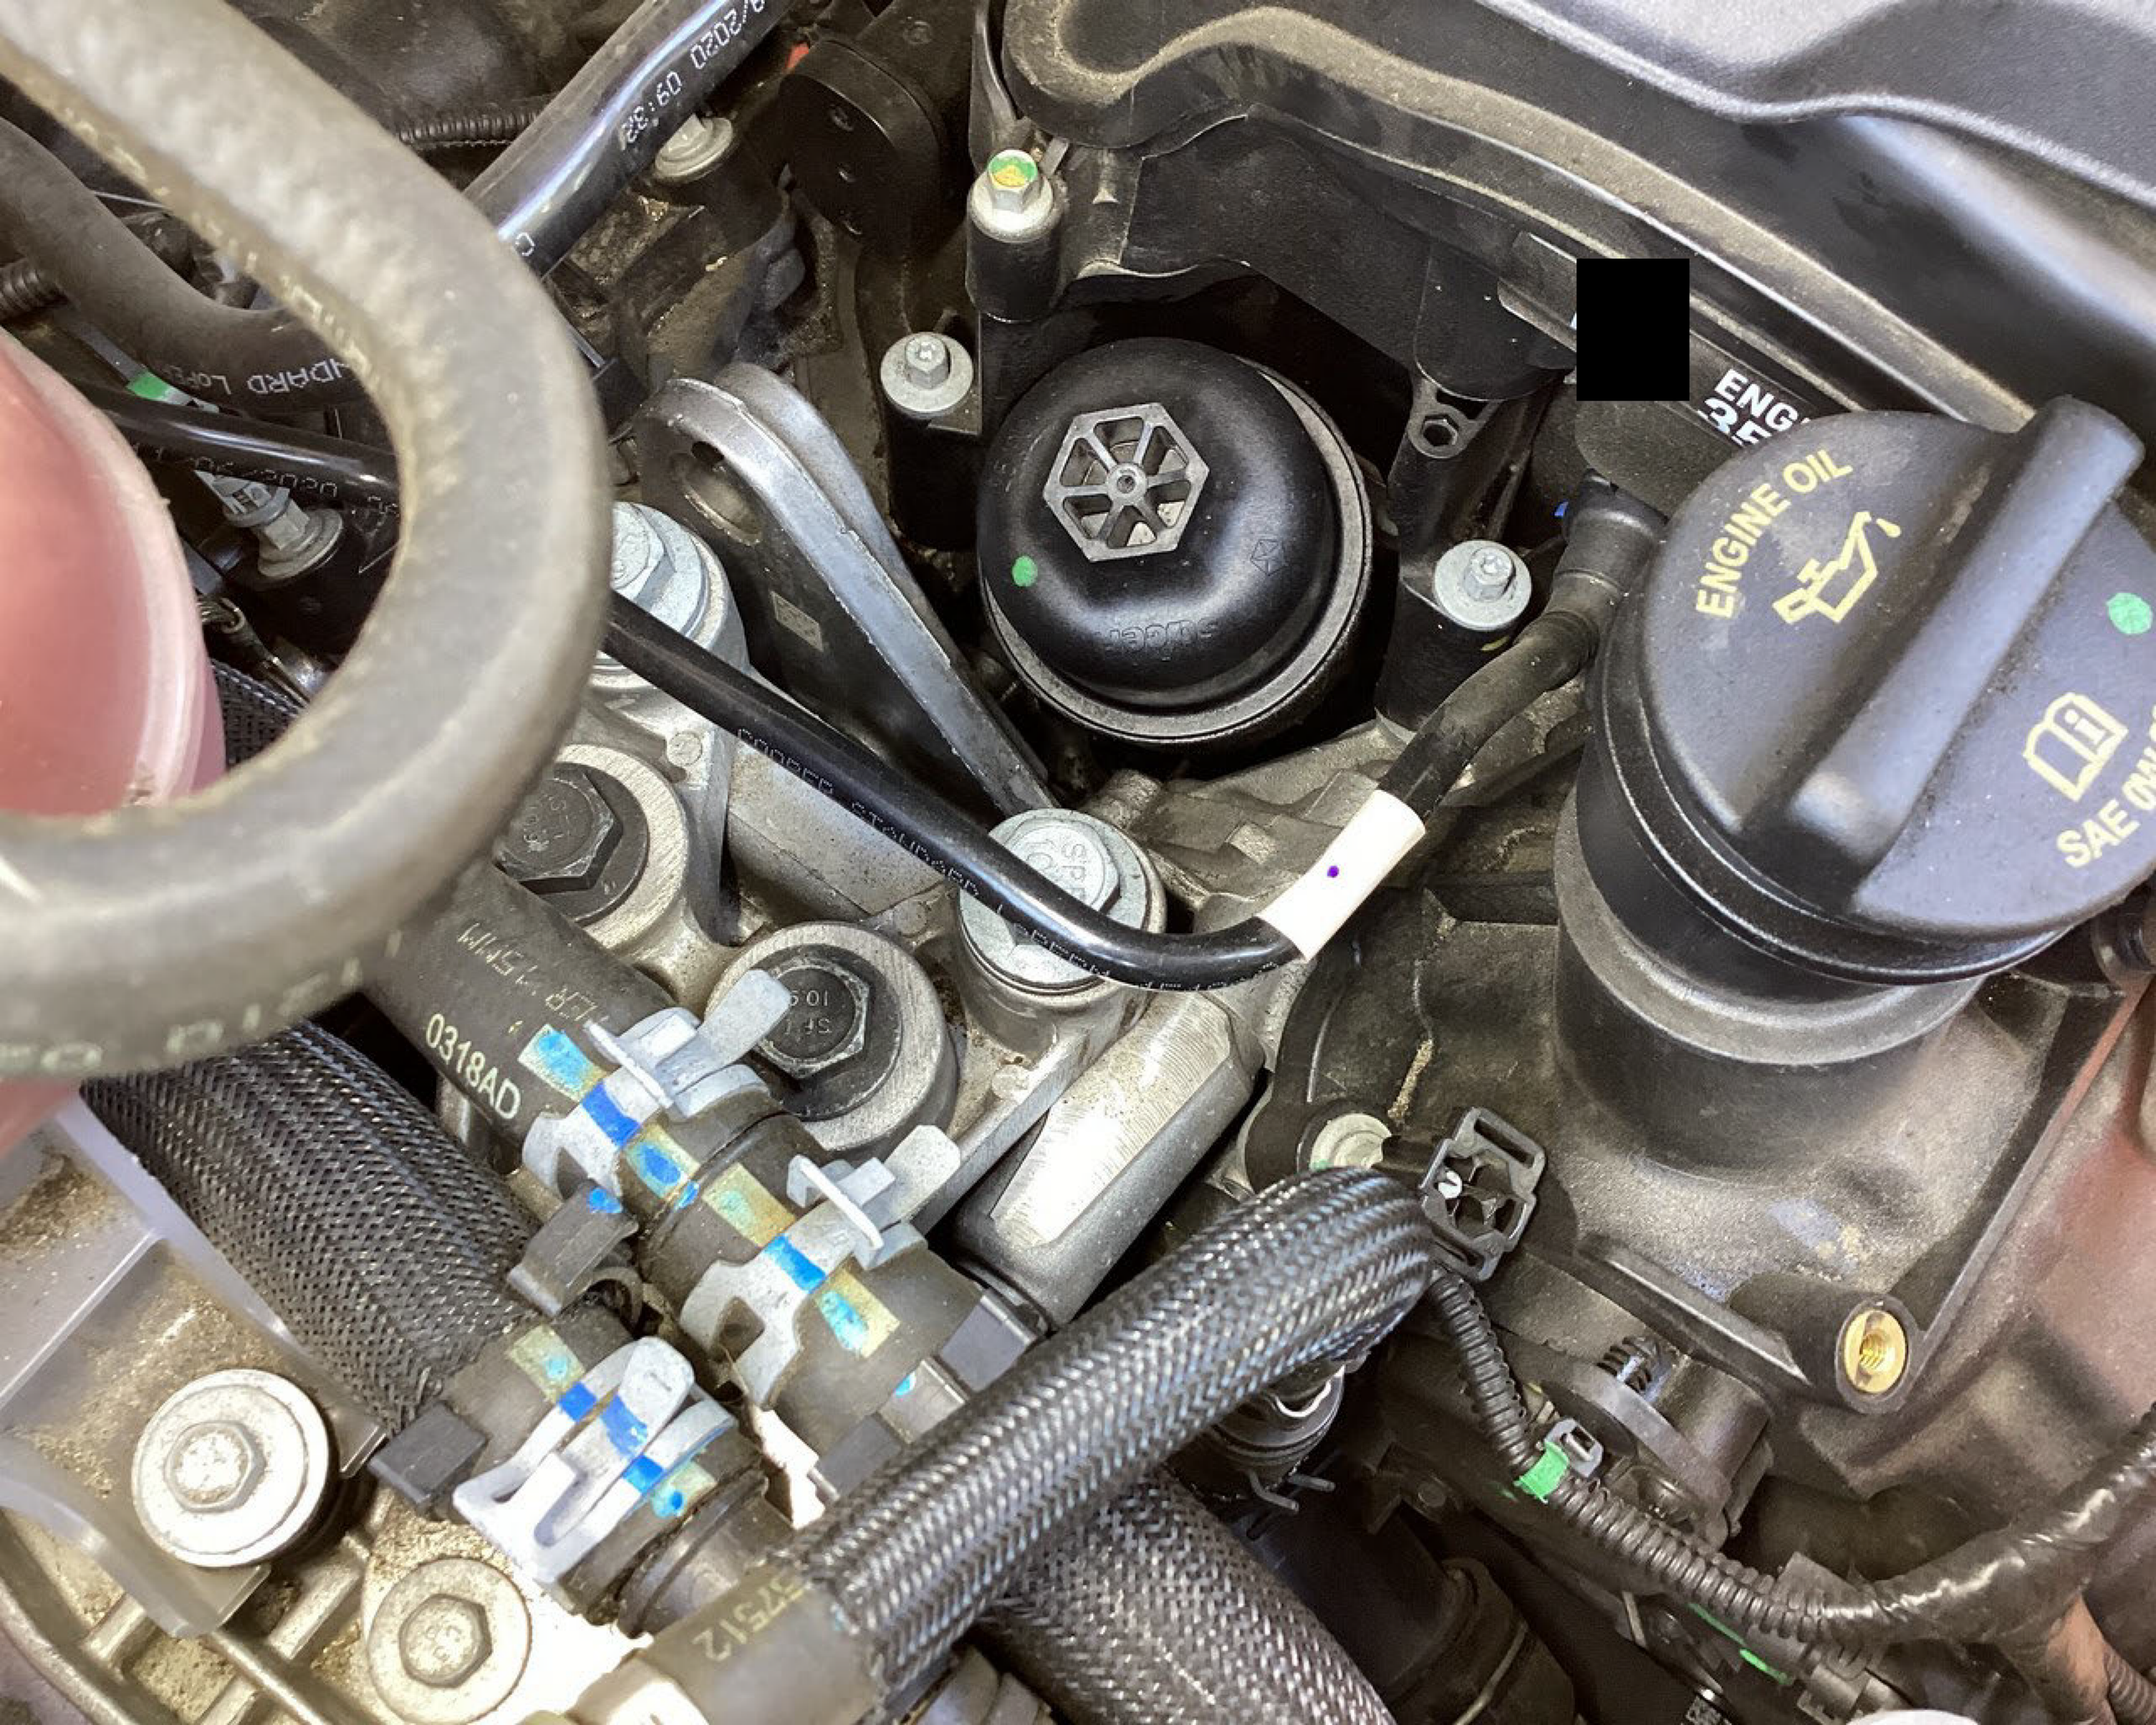
ENGINE OIL
0318AD




68272801AA
5 PSI








OAT COOLANT
MS-12106


68272801AA
OAT COOLANT
MS-12106




SPF
10.9

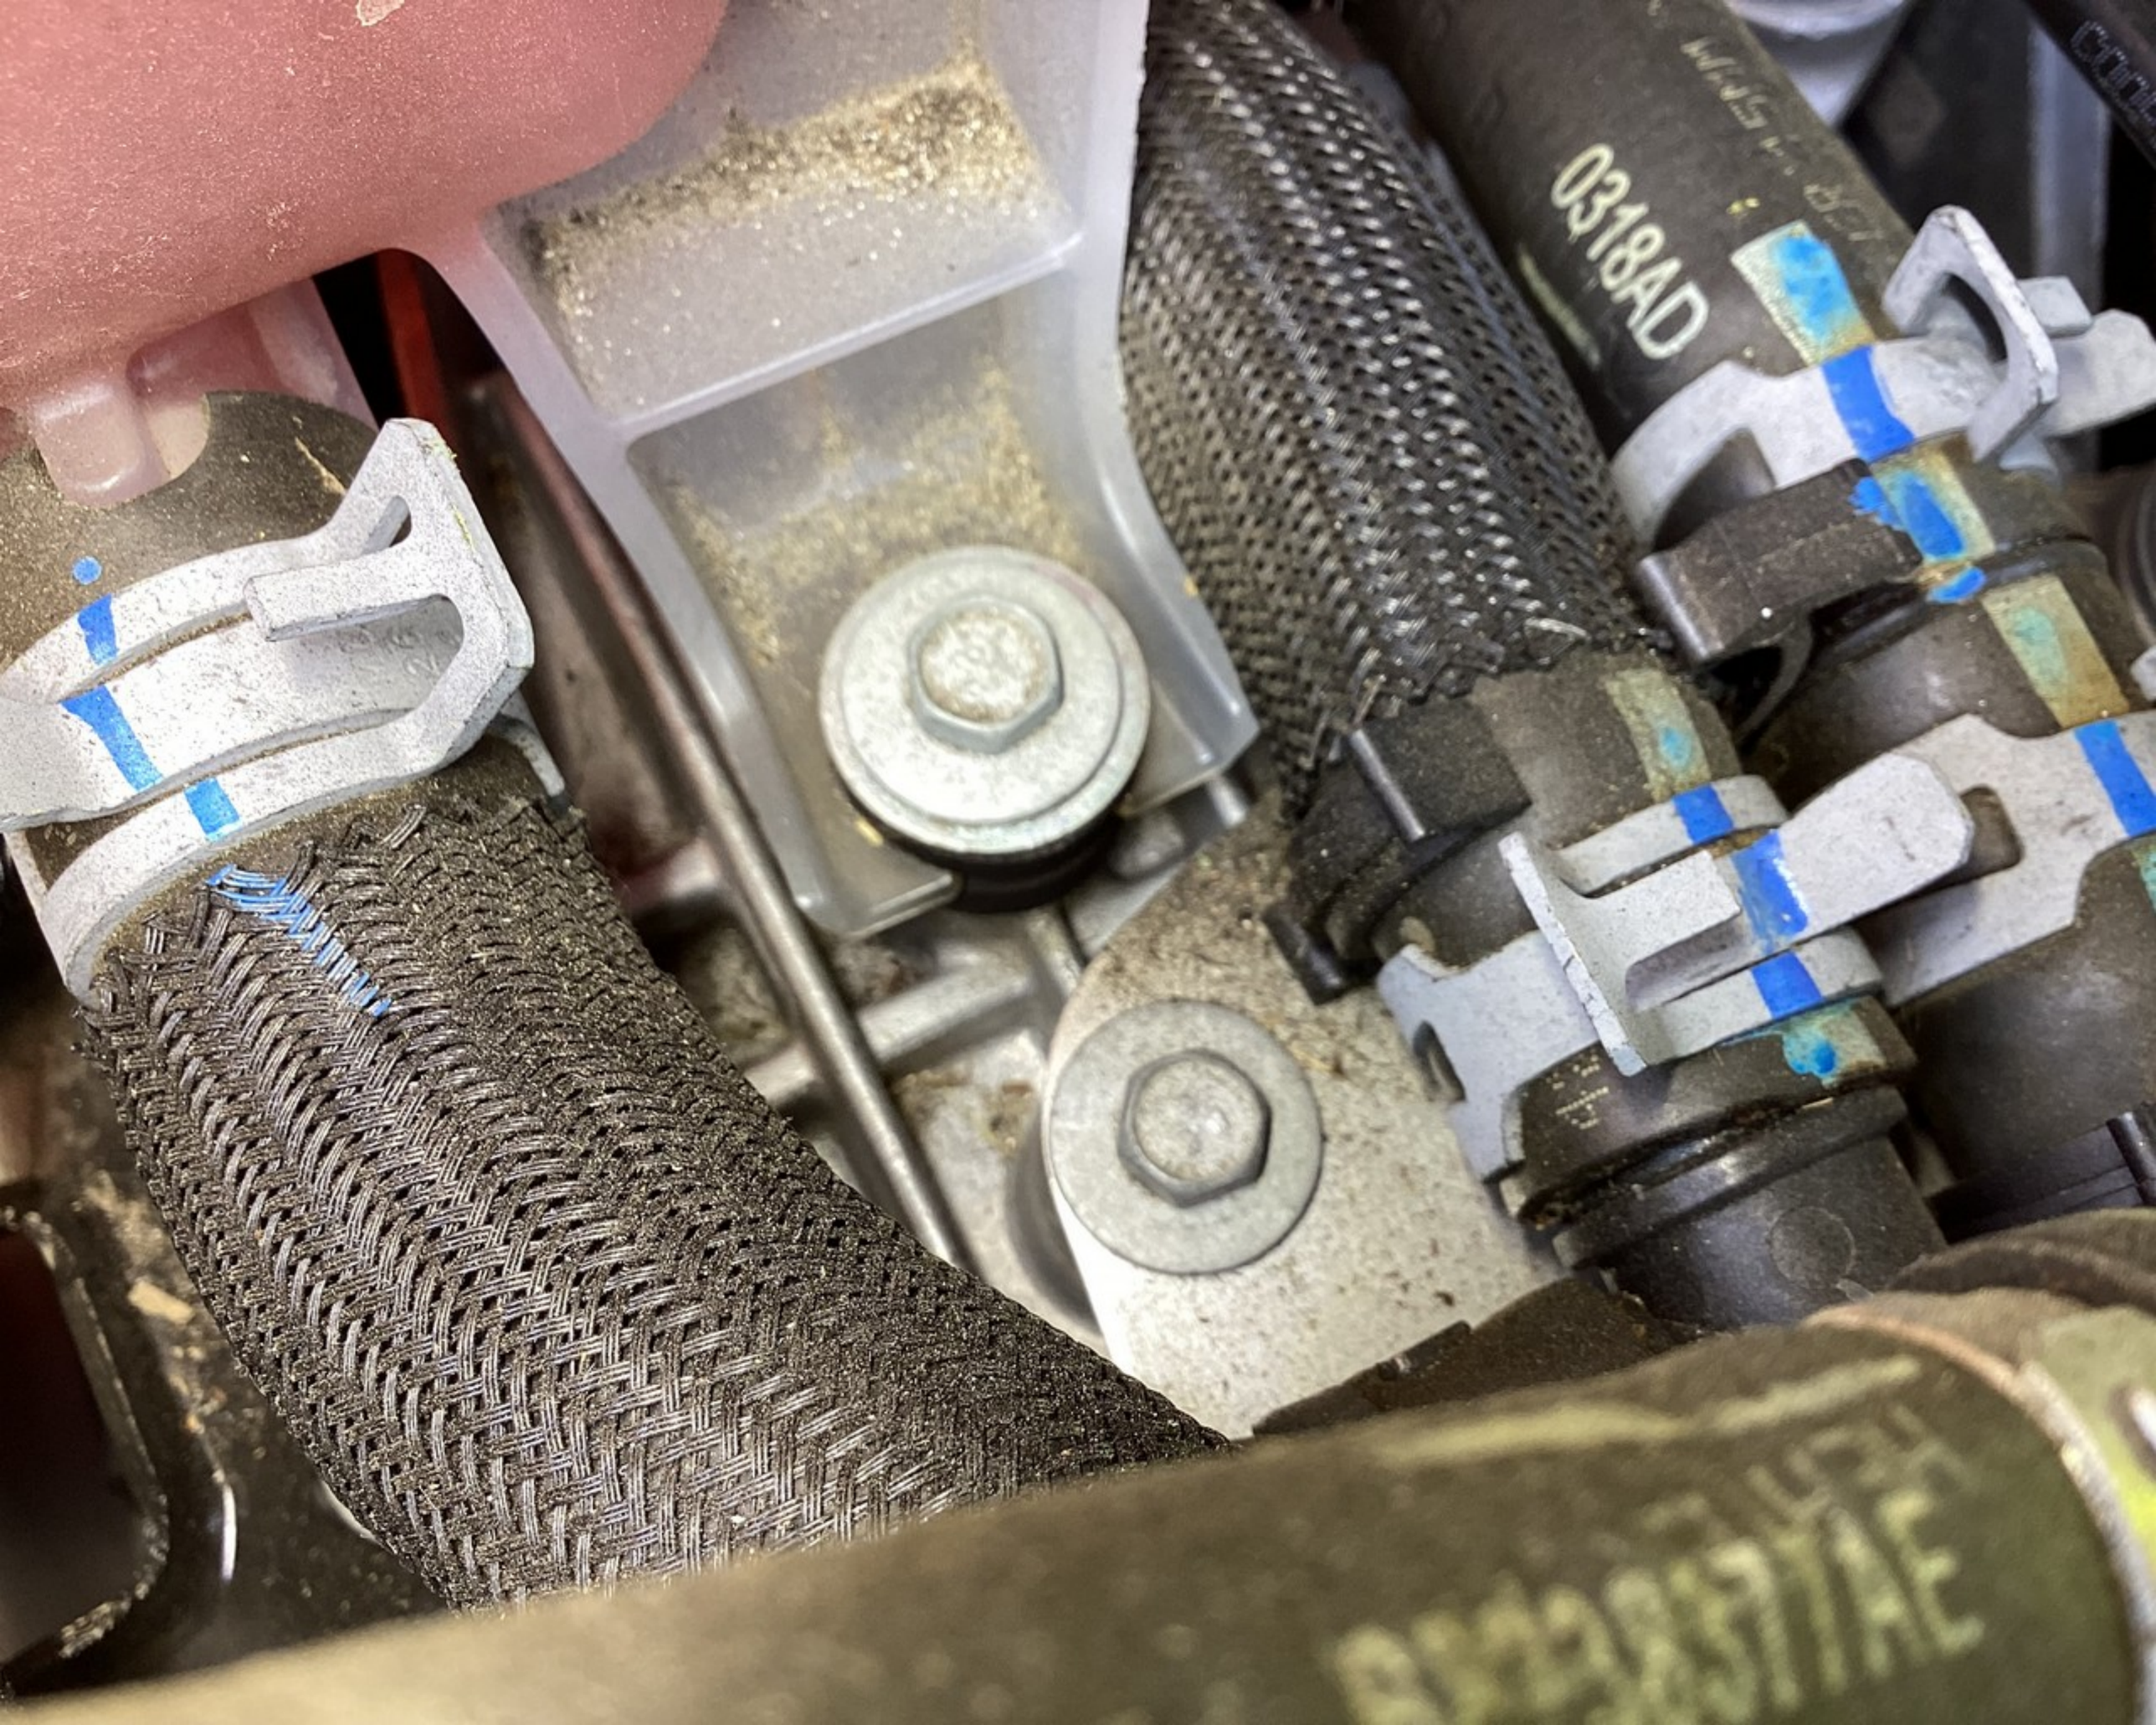
0318AD

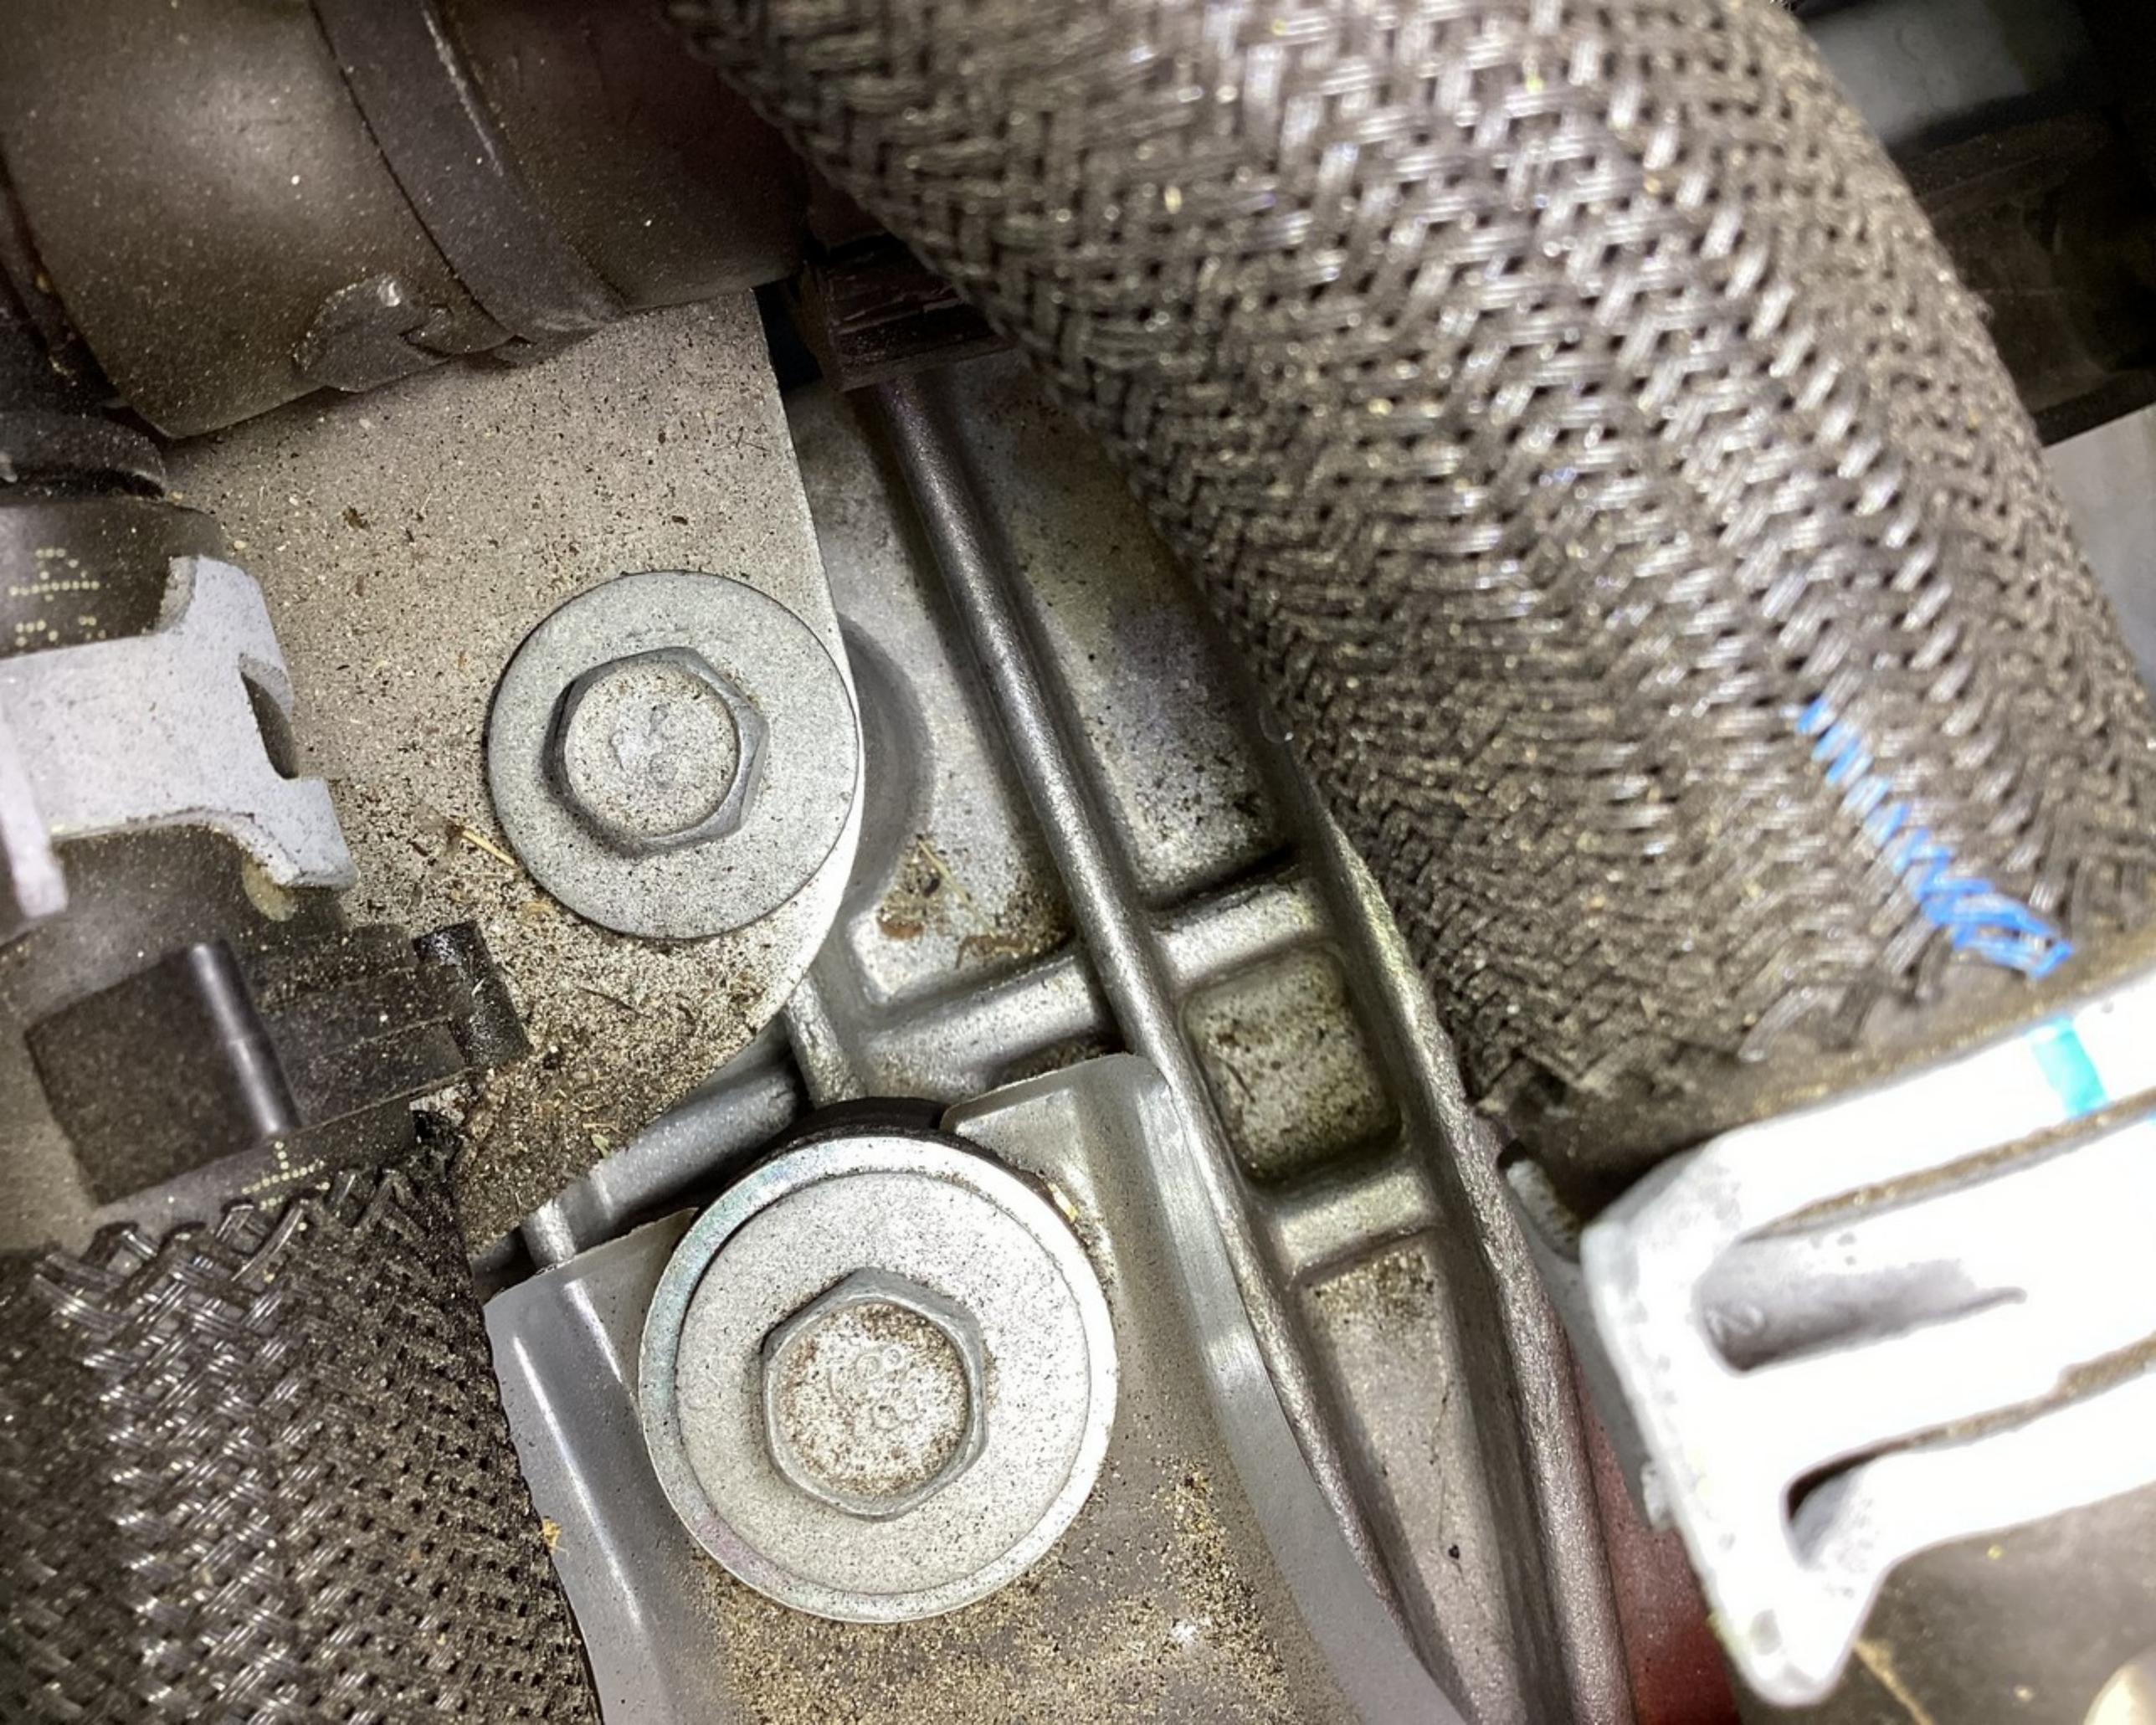

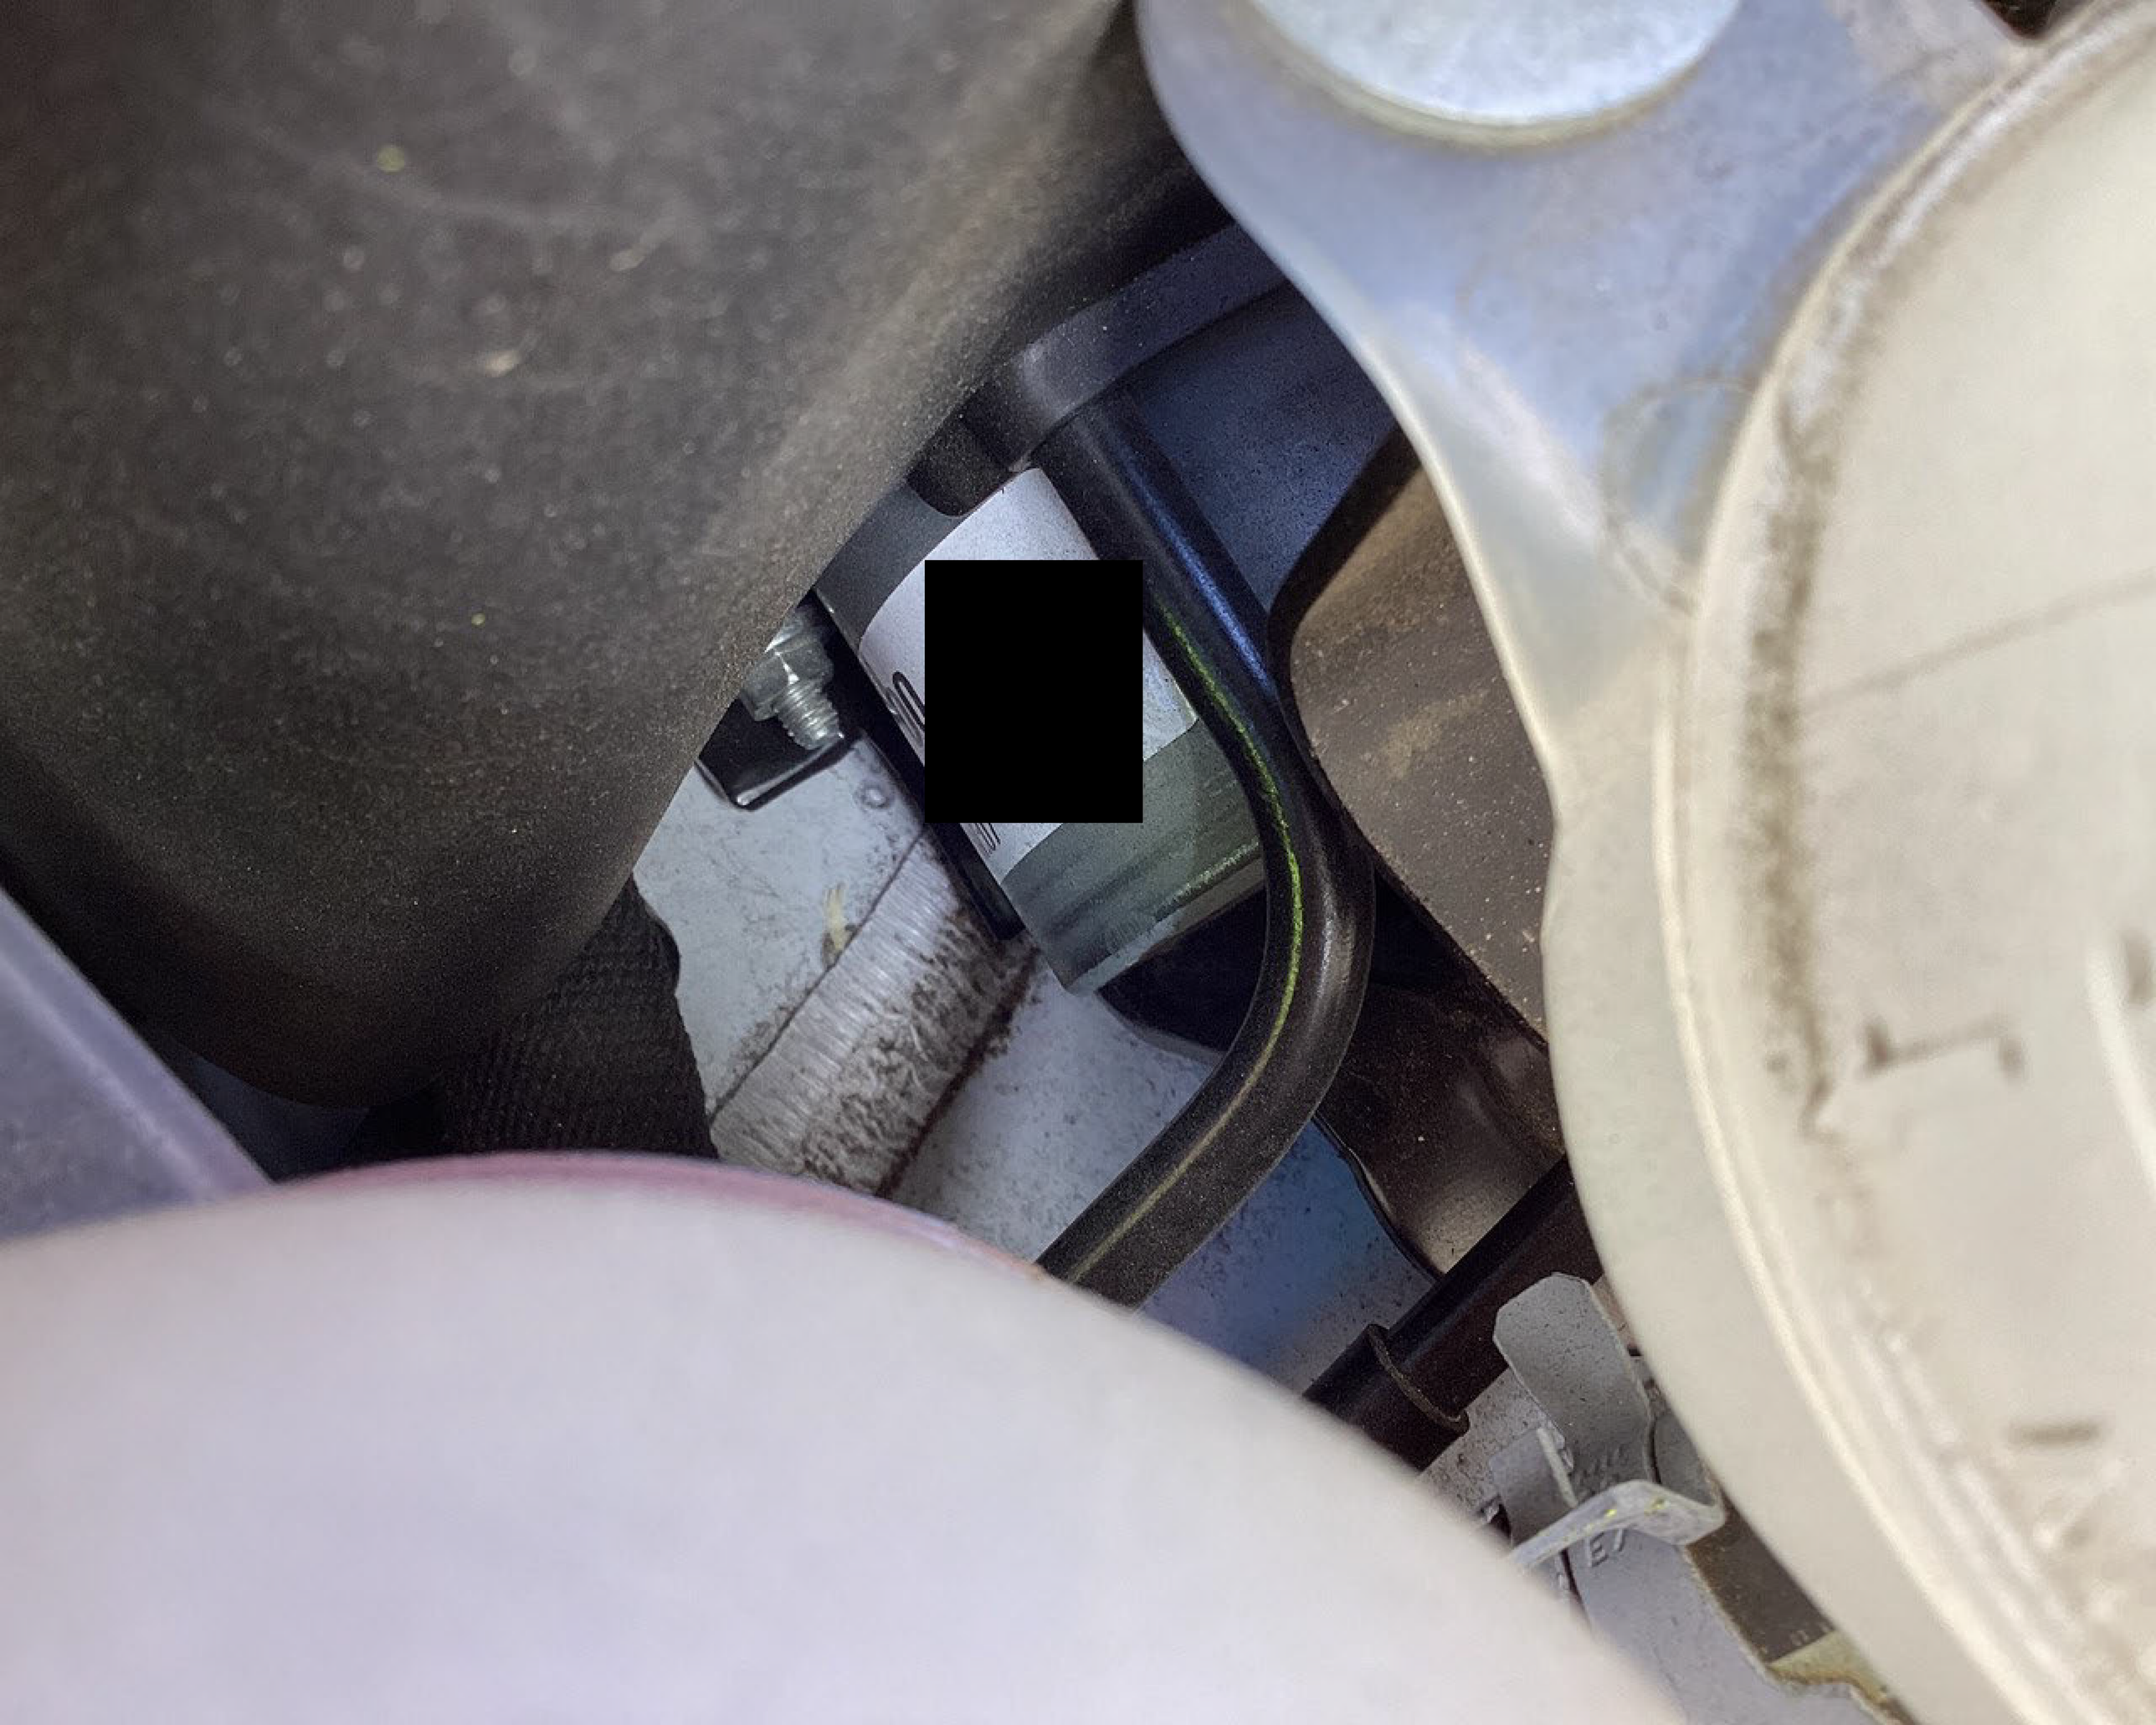


HYBRID


HYBRID

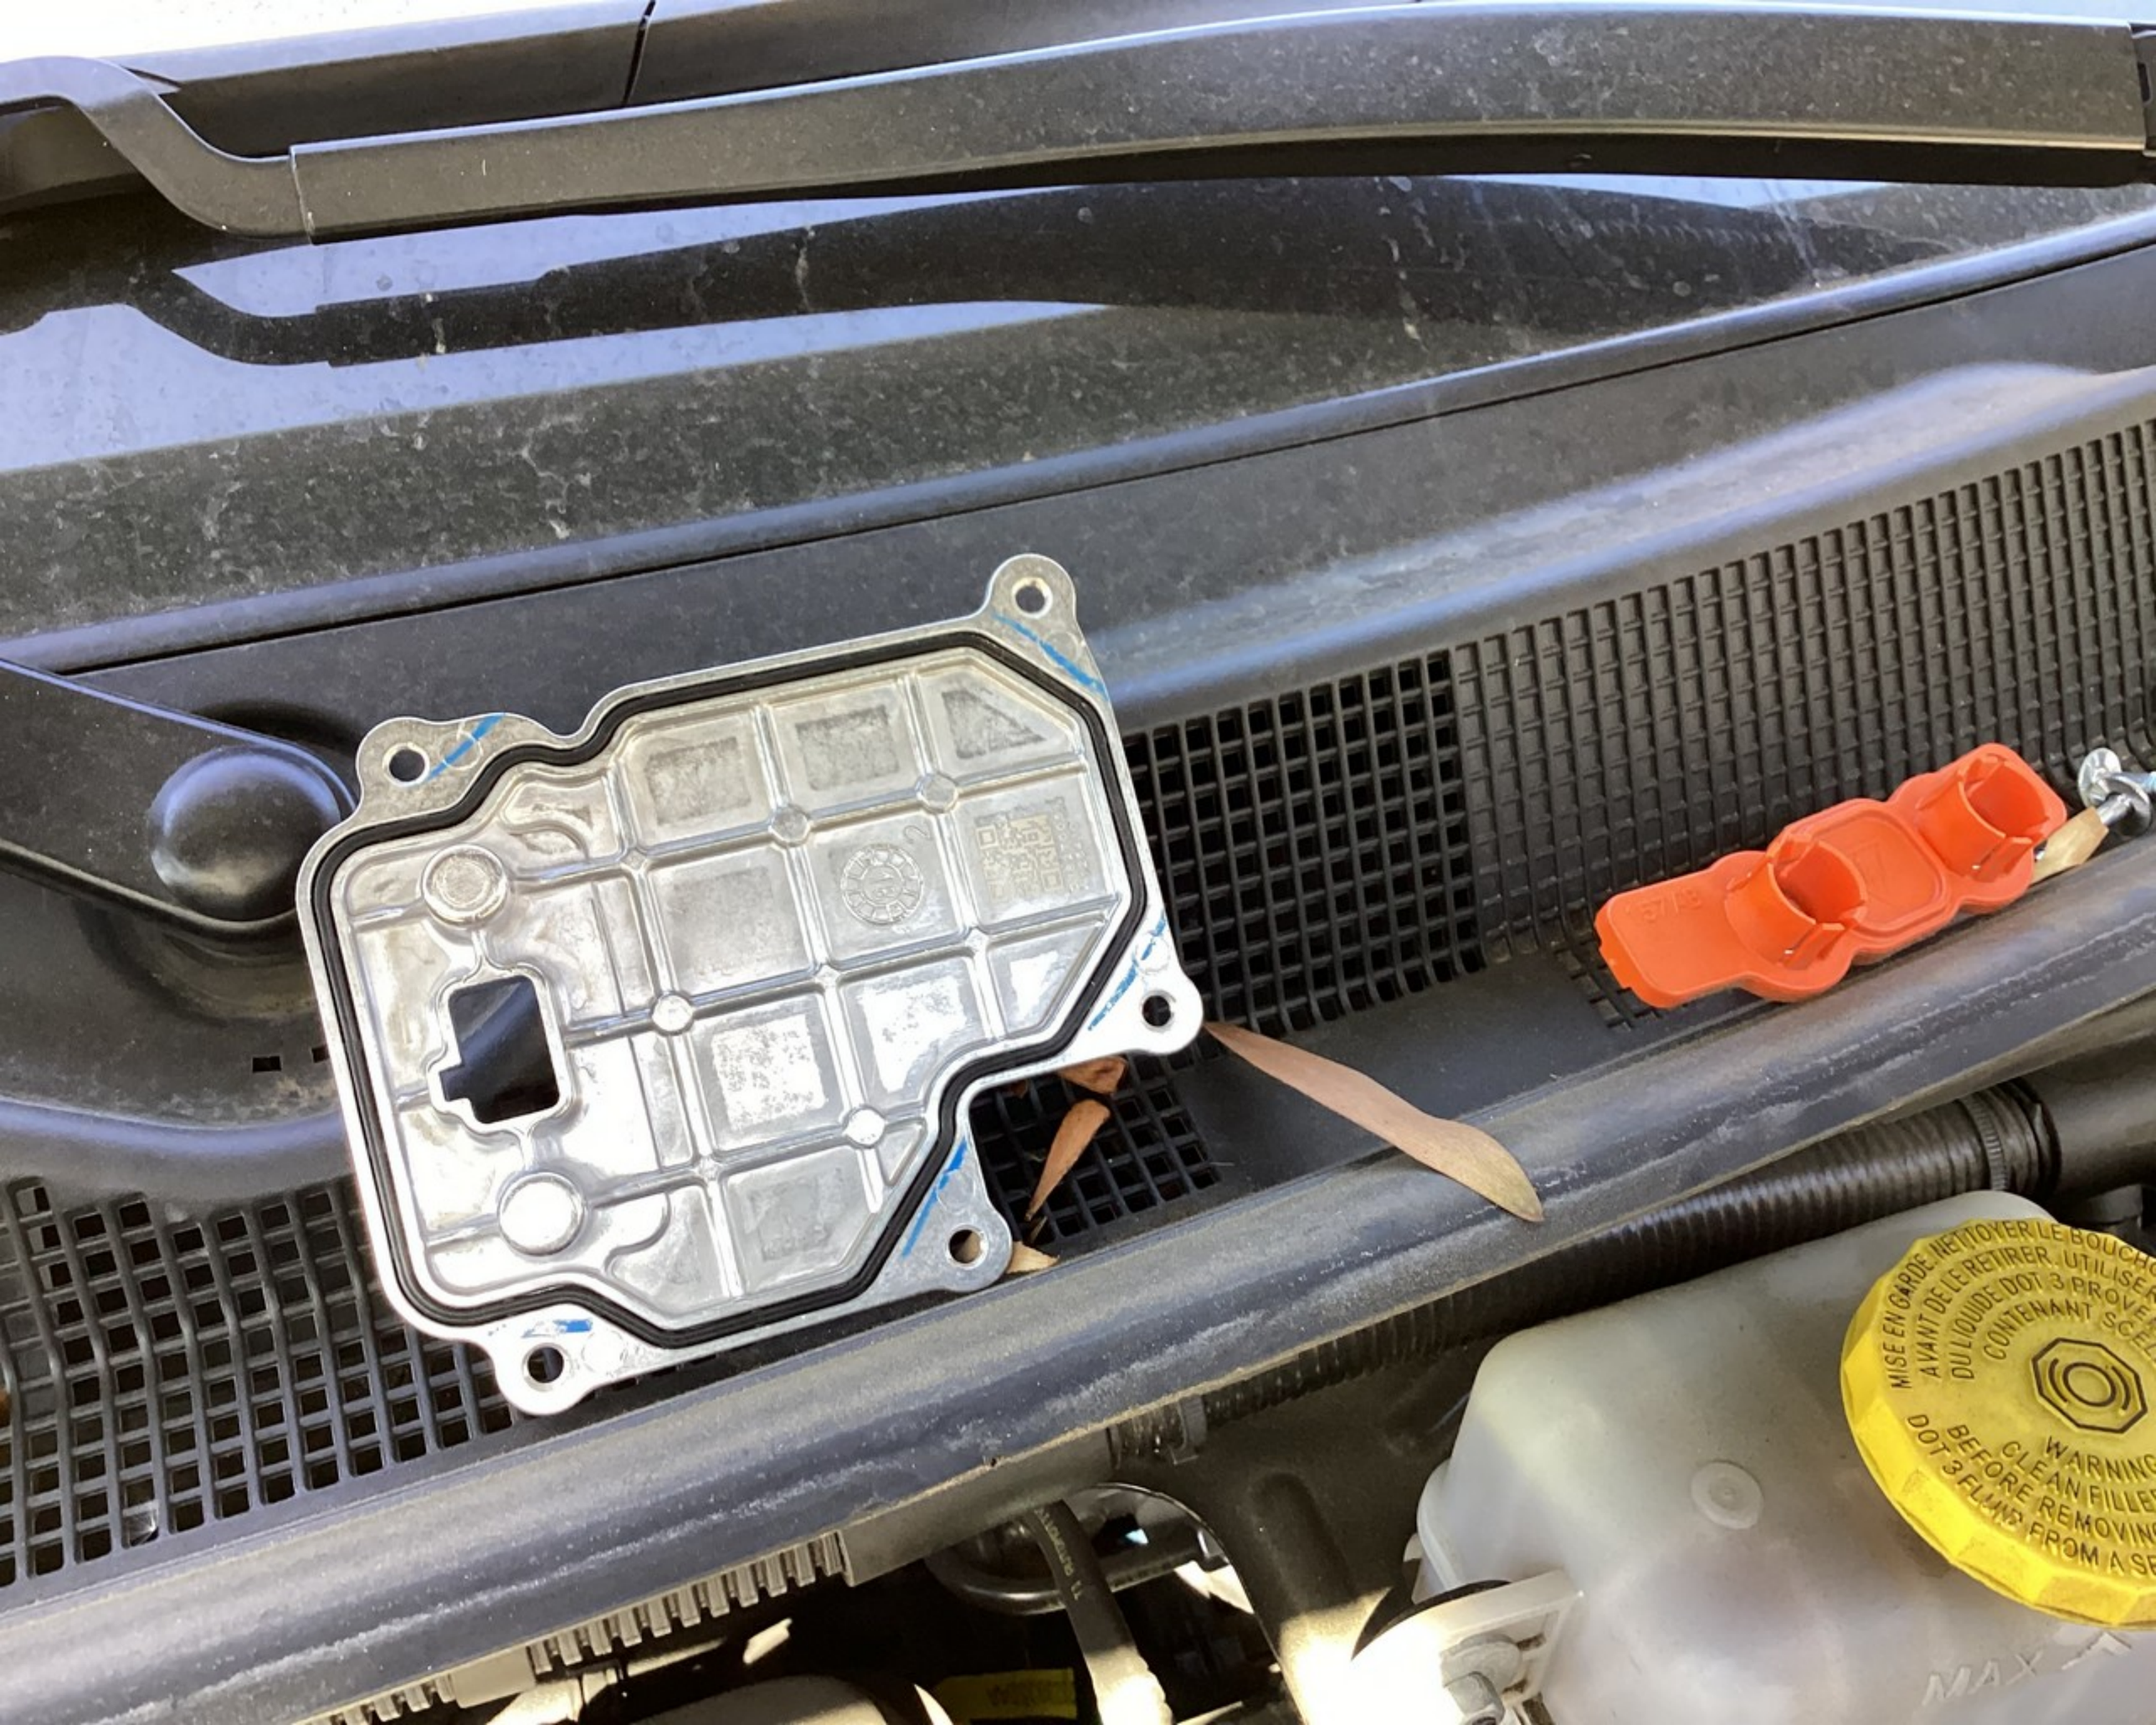
MISE EN GARDE: NETTOYER LE BOUCHON
AVANT DE LE RETIRER. UTILISER
DU LIQUIDE DOT 3 PROVENANT
CONTENANT SCELLÉ
WARNING
CLEAN FILLER
BEFORE REMOVING
DOT 3 FLUID FROM A SE
MAX

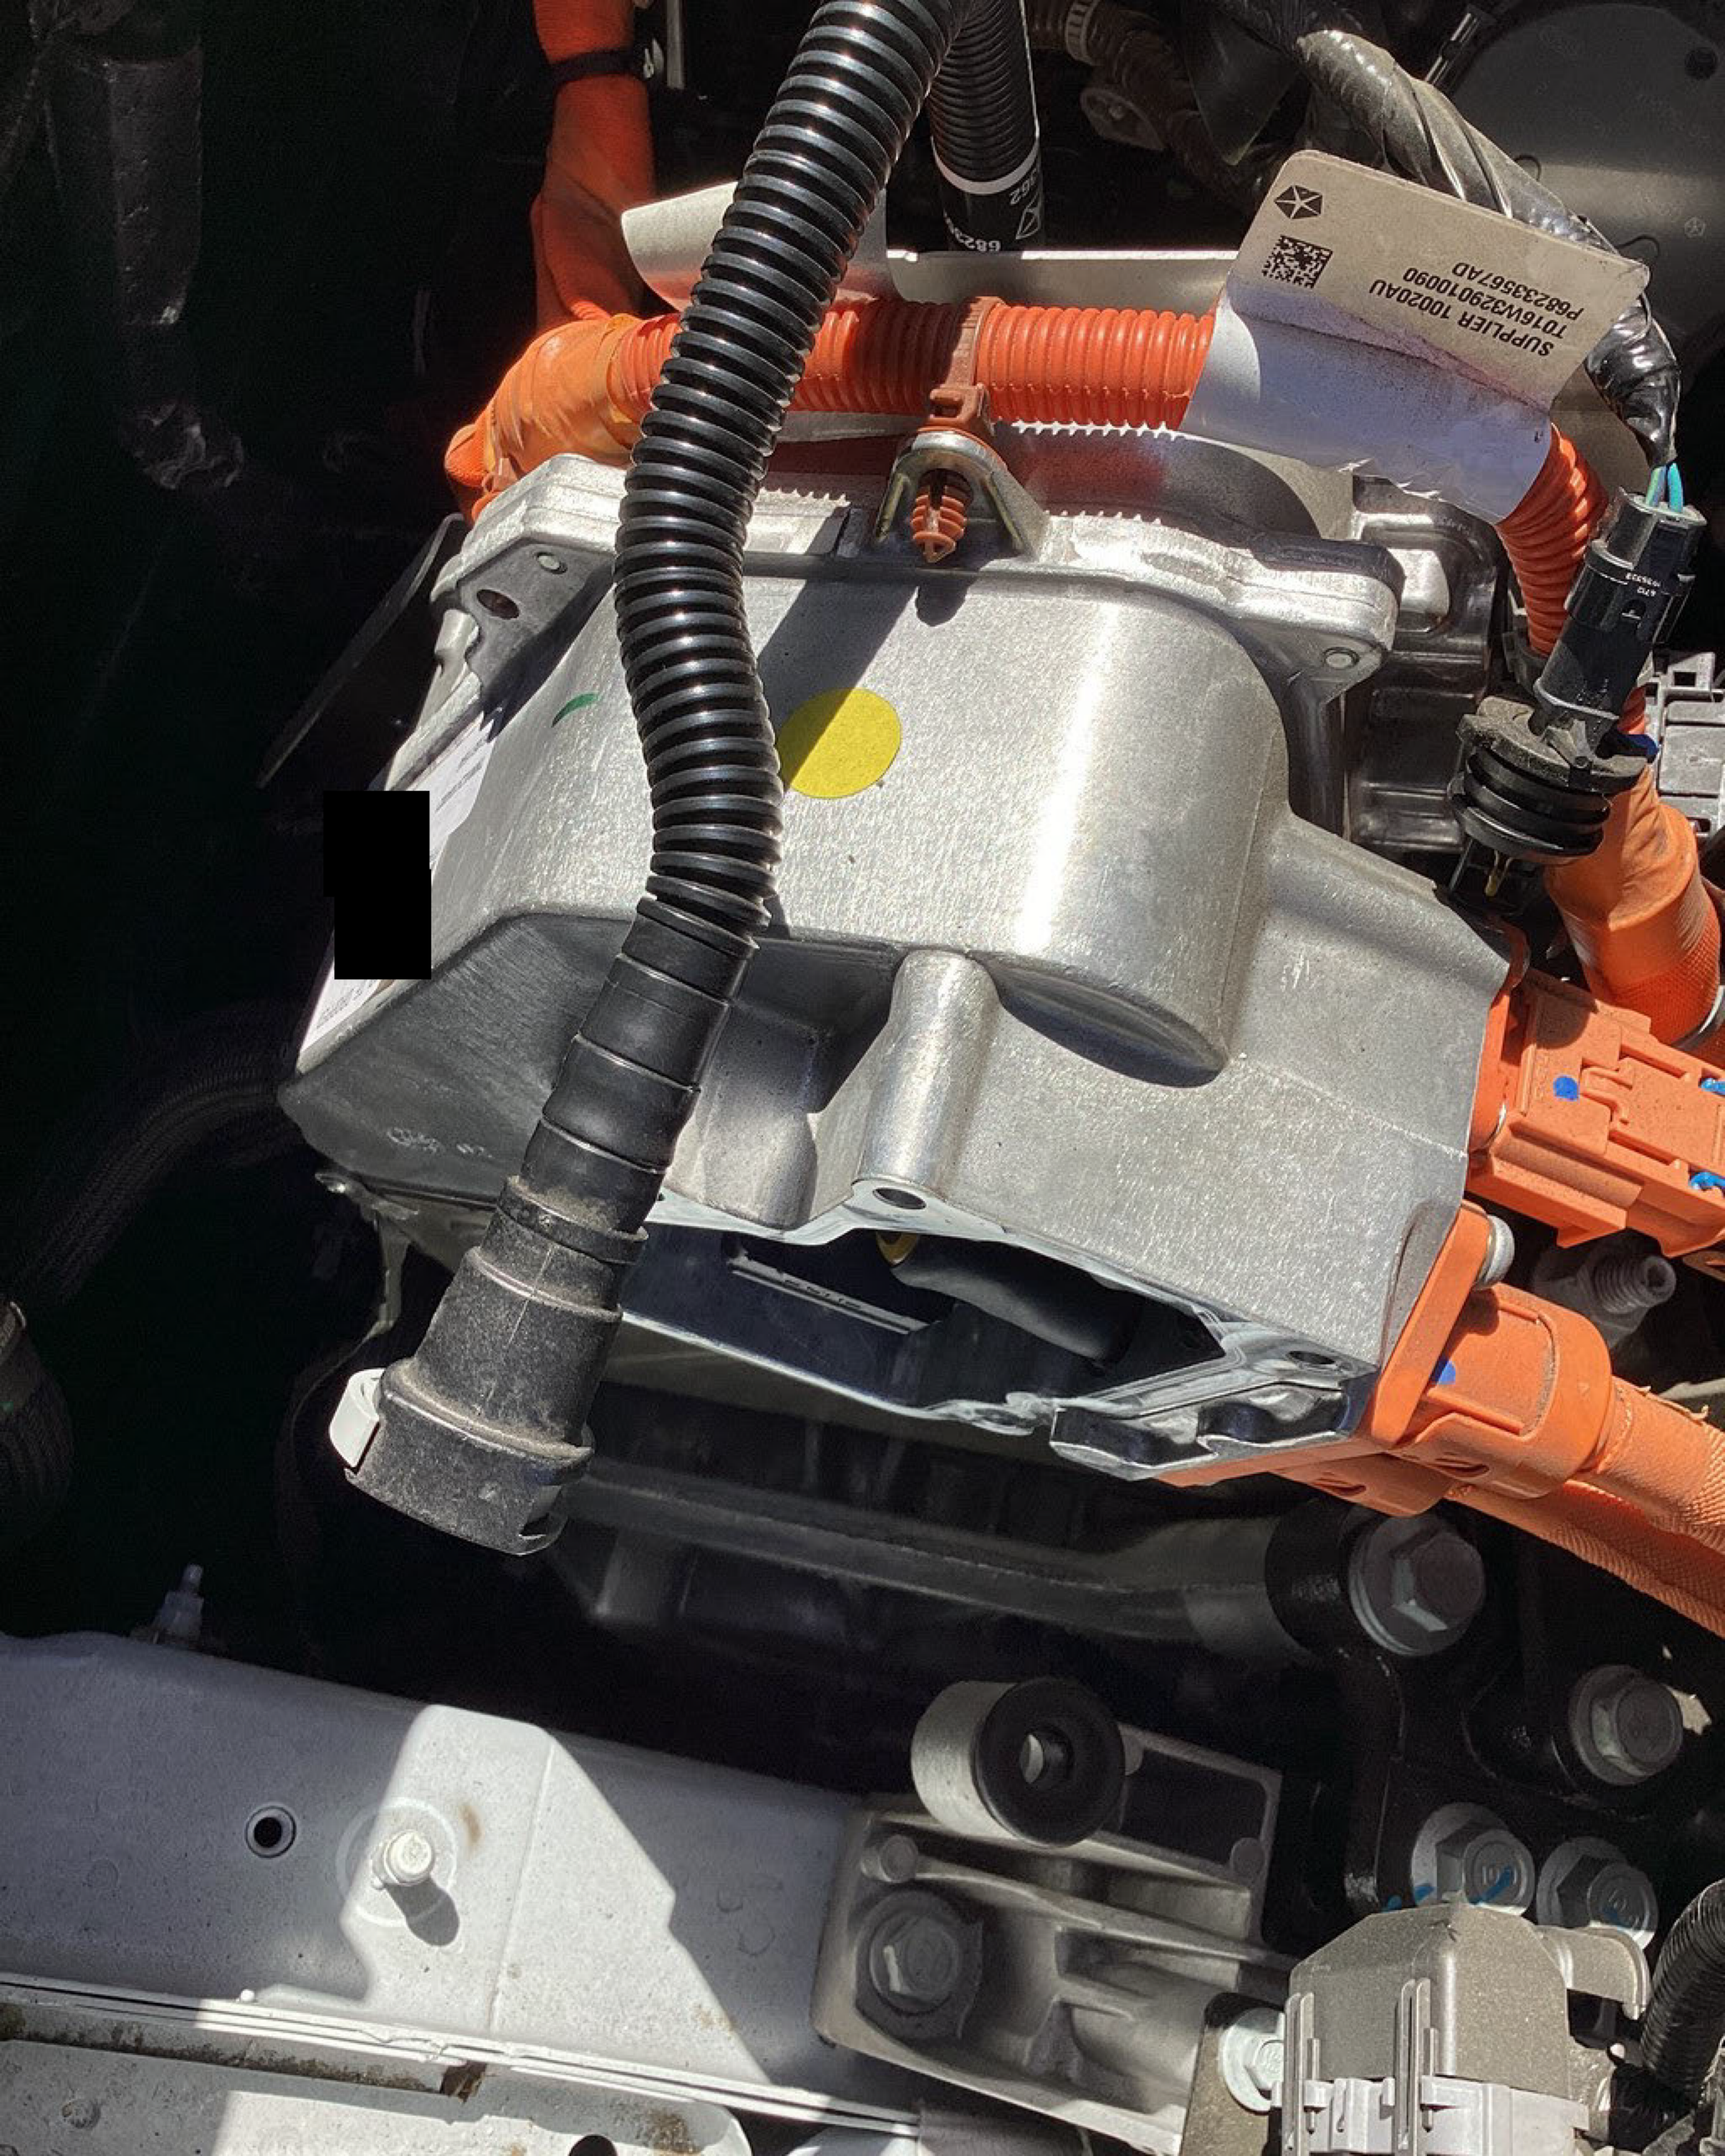
SUPPLIER 10020AU
T016VJ2901009O
P68233567AD


FUSE


FUSE

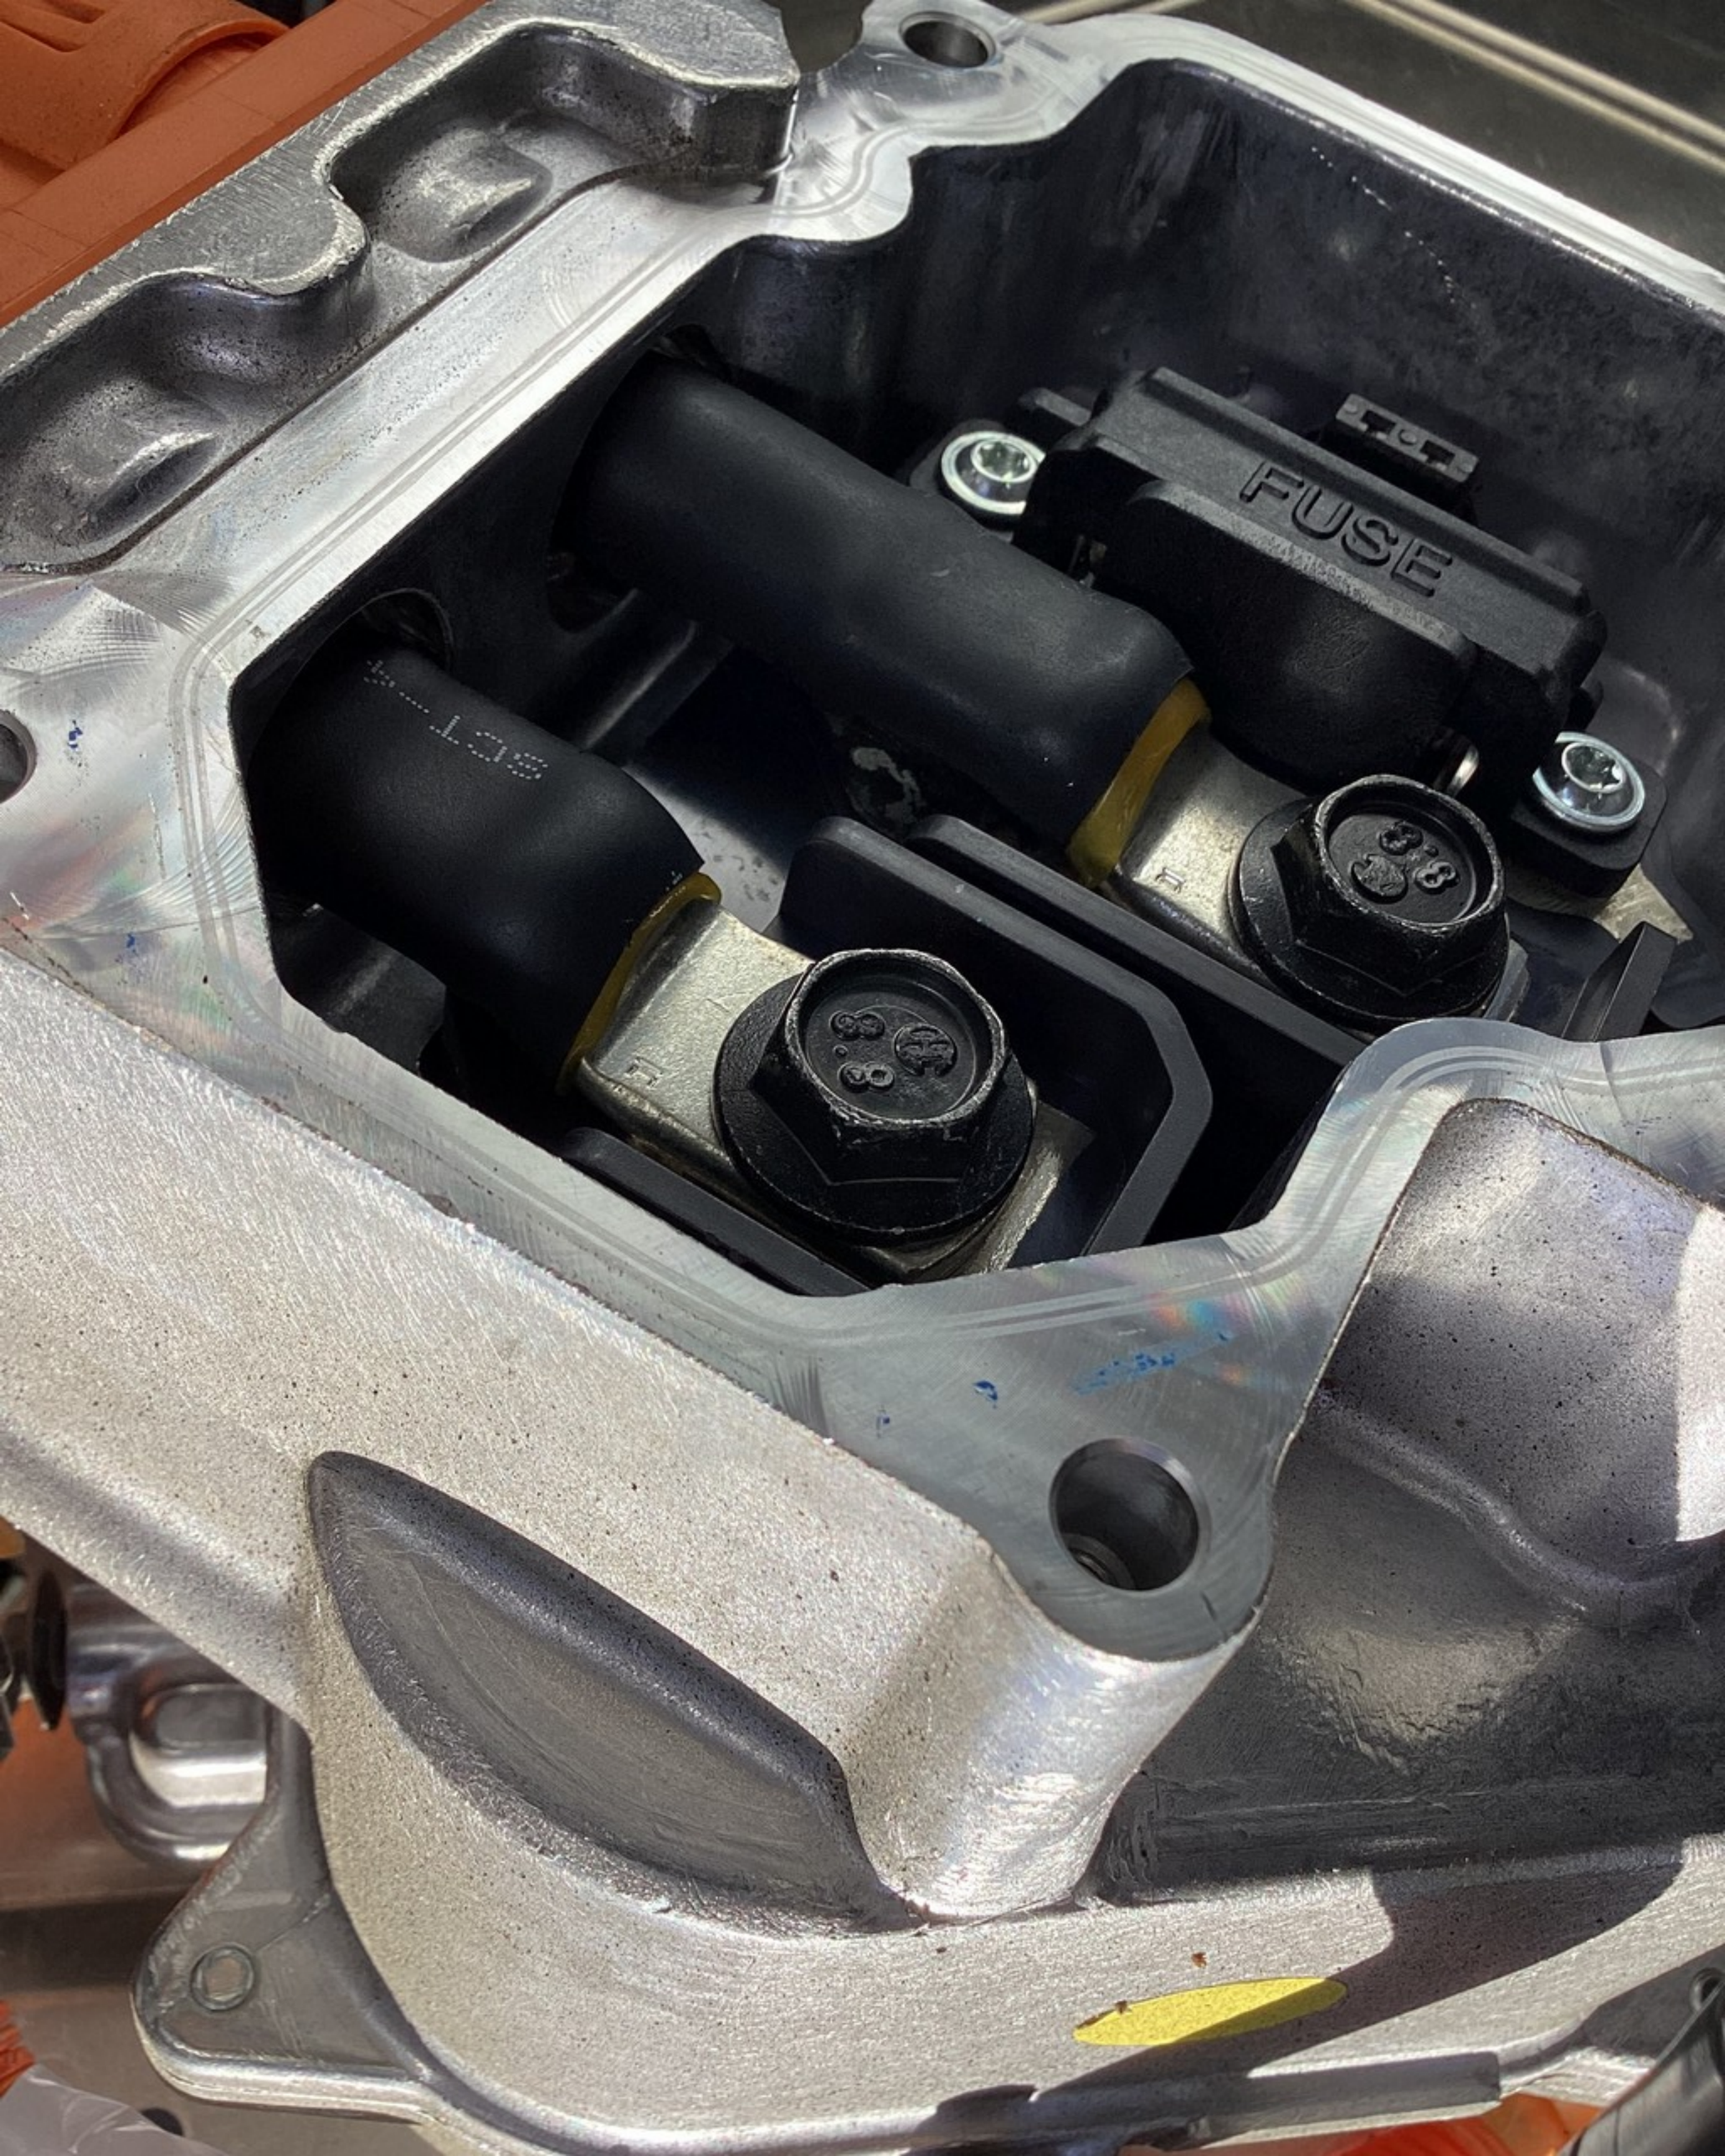
FUSE


FUSE





