Daimler Chrysler

SAFETY RECALL - TIRE, RIM AND INFLATION PRESSURE INFORMATION

Dear Jeeps Vehicle Owner:

This notice is sent to you in accordance with the requirements of the National Traffic and Motor Vehicle Safety Act.

DaimlerChrysler Corporation has decided that a defect, which relates to motor vehicle safety, exists in a small number of 2004 model year Jeep Grand Cherokee, Liberty and Wrangler vehicles.

The problem is...

A computer programming error caused important tire, rim and inflation pressure information to be inadvertently omitted from the certification label on your vehicle (identified on the enclosed form). This information, when used with the weight ratings on the label, establishes vehicle loading limits. Improperly loading your vehicle can cause tire failure and result in a crash without warning.

What you must do to ensure your vehicle compiles...

- We ask that you apply the enclosed label overlay as described on the reverse side of this letter.
- If preferred, you may contact your dealer to schedule a service appointment for installation of the label overlay. The service will be provided free of charge and should only take a few minutes to complete. However, additional time may be necessary depending on how dealer appointments are scheduled and processed. Bring the enclosed label overlay and form with you to your dealer. The form identifies the required service to the dealer.

If you need help...

If you have questions or concerns which your dealer is unable to resolve, please contact DaimlerChrysler at 1-800-853-1403.

If your dealer fails or is unable to remedy this defect without charge and within a reasonable time, you may submit a written complaint to the Administrator, National Highway Traffic Safety Administration, 400 Seventh Street, S.W., Washington, DC 20590, or call the toll-free Auto Safety Hotline at 1-888-327-4236.


We're sorry for any inconvenience, but we are sincerely concerned about your safety. Thank you for your attention to this important matter.

Buckle up for Safety Customer Services Field Operations
DaimlerChrysler Corporation
D05

(over)

Installation Instructions for the Certification Label Overlay

- Open the driver's door and locate the Vehicle Certification Label on the driver's door (Grand Cherokee and Liberty) or on the lower A-pillar (Wrangler) as shown (Figure 1).
- Clean the existing certification label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
- Remove the information correction label overlay from its paper backing and carefully install it on the Vehicle Certification Label covering the original information (Figure 1). Firmly press and smooth the overlay label to the surface of the Vehicle Certification Label to ensure good adhesion.

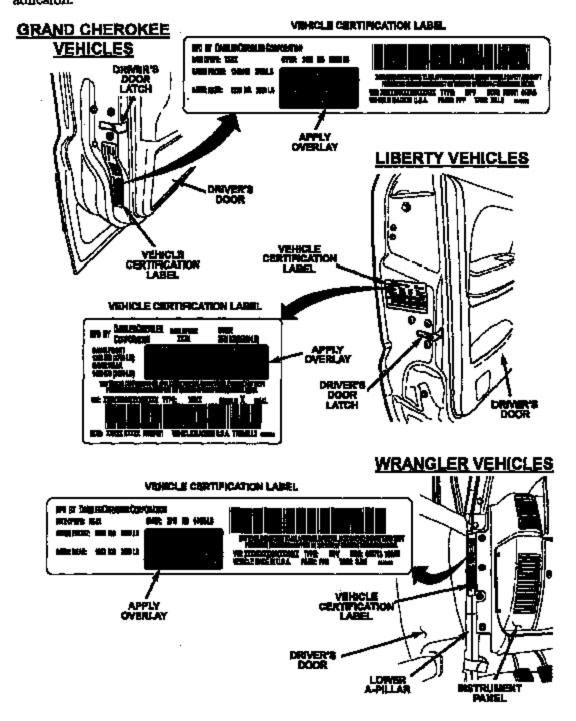

Flaure 1