

# \*\*\*RECALL CAMPAIGN\*\*\*

Girardin Minibus recall  
campaign:  
05-009-CRA


Flat bar installation on each side of the seat where the child seat anchorage is bolted (to increase the strength of the seat back)

NHTSA  
recall #  
05V-141

Transport  
Canada  
recall #  
05-101


Procedure to modify the seats with child seat anchorage. This procedure applies to 30, 34 & 39" seats.

1. Remove the seat bottom.

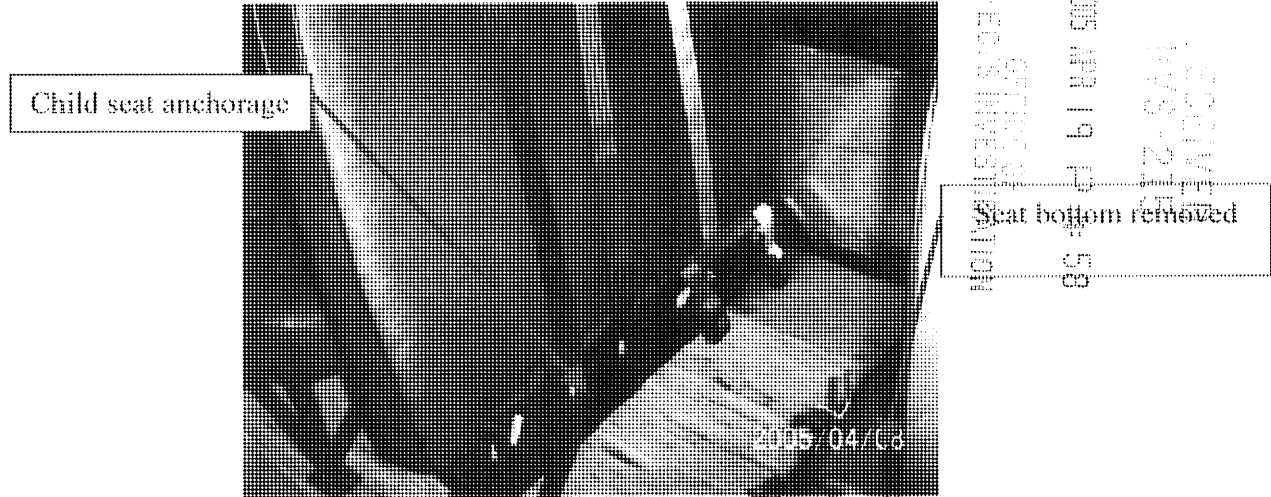


Picture 1: Seat without seat bottom


2. Remove the bolts from the child seat anchorage. Be careful not to move the anchorage.
3. Pull up the bottom of the seat back cover & put the flat bars in place as shown on the pictures below. Take note that there are two different flat bars. One is designed to be installed on the wall side and the other on the aisle side.

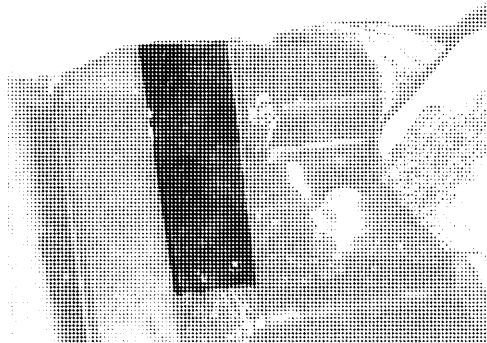

Picture 2: Aisle side flat bar N/P : 51DZZ001

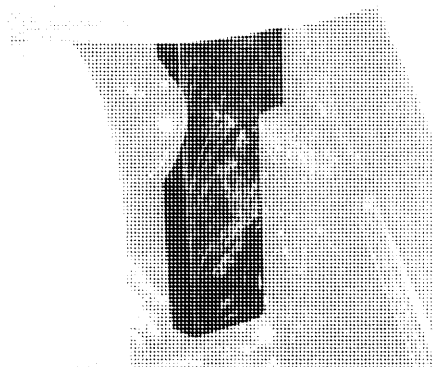

Picture 3: Wall side flat bar N/P: 51DZZ002



# \*\*\* RECALL CAMPAIGN \*\*\*


Girardin Minibus recall campaign:  
**05-009-CRA**

**Flat bar installation on each side of the seat where the child seat anchorage is bolted (to increase the strength of the seat back)**

NHTSA recall #  
**05V-141**

Transport Canada recall #  
**05-101**

4. Mark the position of the fastening bolts on the flat bars with a marker or with a centre punch.

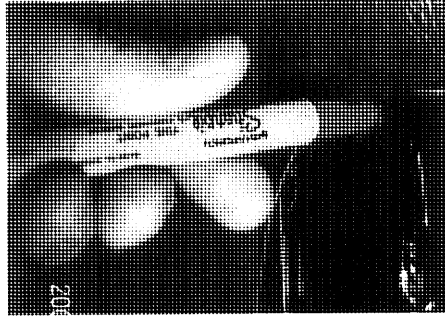

Picture 4: Marker inside the hole where the fastening bolt goes (at the back of the seat)

5. Remove the flat bar and drill a 3/8" hole where you have made a mark. Do not drill the flat bars without marking them on the seat where they will be installed. The position of the holes may vary from one seat to another due to the manufacturing tolerance of the seats.
6. Fix the flat bars with 5/16"-18 NC x 2" long bolts P/N: 370-205167 and use the lock nuts 5/16" P/N G-5299 supplied. You will need one bolt & one lock nut per flat bar. Torque the bolts at 16 ft-lb (22 Nm).
7. Put the seat back cover as it was before and reinstall the seat bottom.
8. Repeat the above steps for all seats equipped with child seat anchorage.

### Labour

Time required to fix one seat is 20 minutes and 10 minutes per additional seat.

### Parts list for each seat

| Part #     | Description                         | Quantity |
|------------|-------------------------------------|----------|
| 51DZZ001   | Flat bar – aisle side               | 1        |
| 51DZZ002   | Flat bar – wall side                | 1        |
| G-5299     | Lock nut 5/16"- 18 NC grade 5       | 2        |
| 370-205167 | Bolt 5/16"- 18 NC x 2" long grade 8 | 2        |