

Dealer Service Instructions for:

Safety Recall G10

Tire Inflation Pressure Labels

Models

2007 (DH) Dodge Ram 2500 Series 4x4 Pick Up Truck

NOTE: This recall applies only to the above vehicles equipped with LT265/70R17E tires and a 5.9L or 6.7L diesel engine (“C” or “A” in the 8th VIN Position) built at the Saltillo or St. Louis South Assembly Plant (“G” or “J” in the 11th VIN Position) from November 27, 2006 through December 22, 2006 (MDH 112707 through 122217).

IMPORTANT: Some of the involved vehicles may be in dealer new vehicle inventory. Federal law requires you to complete this recall service on these vehicles before retail delivery. Dealers should also consider this requirement to apply to used vehicle inventory and should perform this recall on vehicles in for service. Involved vehicles can be determined by using the VIP inquiry process.

Subject

The Certification label, Tire and Loading Information label, and Supplemental Tire Pressure Information label on about 3,200 of the above vehicles contain incorrect tire inflation pressure information and do not comply with Federal Motor Vehicle Safety Standard (FMVSS) No. 120 – Tire Selection and Rims for Motor Vehicles other than Passenger Cars. Improper tire inflation pressure can cause tire failure and result in a crash without warning.

Repair

Dealers are required to apply a new Certification label overlay, Tire and Loading Information label overlay and Supplemental Tire Pressure Information label onto all involved vehicles in new inventory.

A Certification label overlay, Tire and Loading Information label overlay, and Supplemental Tire Pressure Information label will be mailed to owners known to DaimlerChrysler for the owners to install (or for installation by their dealer if preferred).

Parts Information

<u>Part Number</u>	<u>Description</u>
CBA0G100	Label Package

Each package contains the following components:

<u>Quantity</u>	<u>Description</u>
1	Overlay, Certification Label
1	Overlay, Tire and Loading Information Label
1	Label, Supplemental Tire Pressure Information

Each dealer to whom vehicles in the recall were assigned will receive enough Label Packages to service about 100% of those vehicles.

Service Procedure

1. Open the driver’s door and locate the Certification label on the driver’s door as shown in Figure 1.
2. Clean the existing Certification label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
3. Remove the Certification label overlay from its paper backing and carefully install it on the Certification label, covering the incorrect tire inflation pressure information (Figure 1). Firmly press and smooth the label to the surface of the Certification label to ensure good adhesion.
4. Locate the Supplemental Tire Pressure Information label on the driver’s door (Figure 1).
5. Clean the existing Supplemental Tire Pressure Information label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
6. Remove the Supplemental Tire Pressure Information label from its paper backing and carefully install it over the original label (Figure 1).

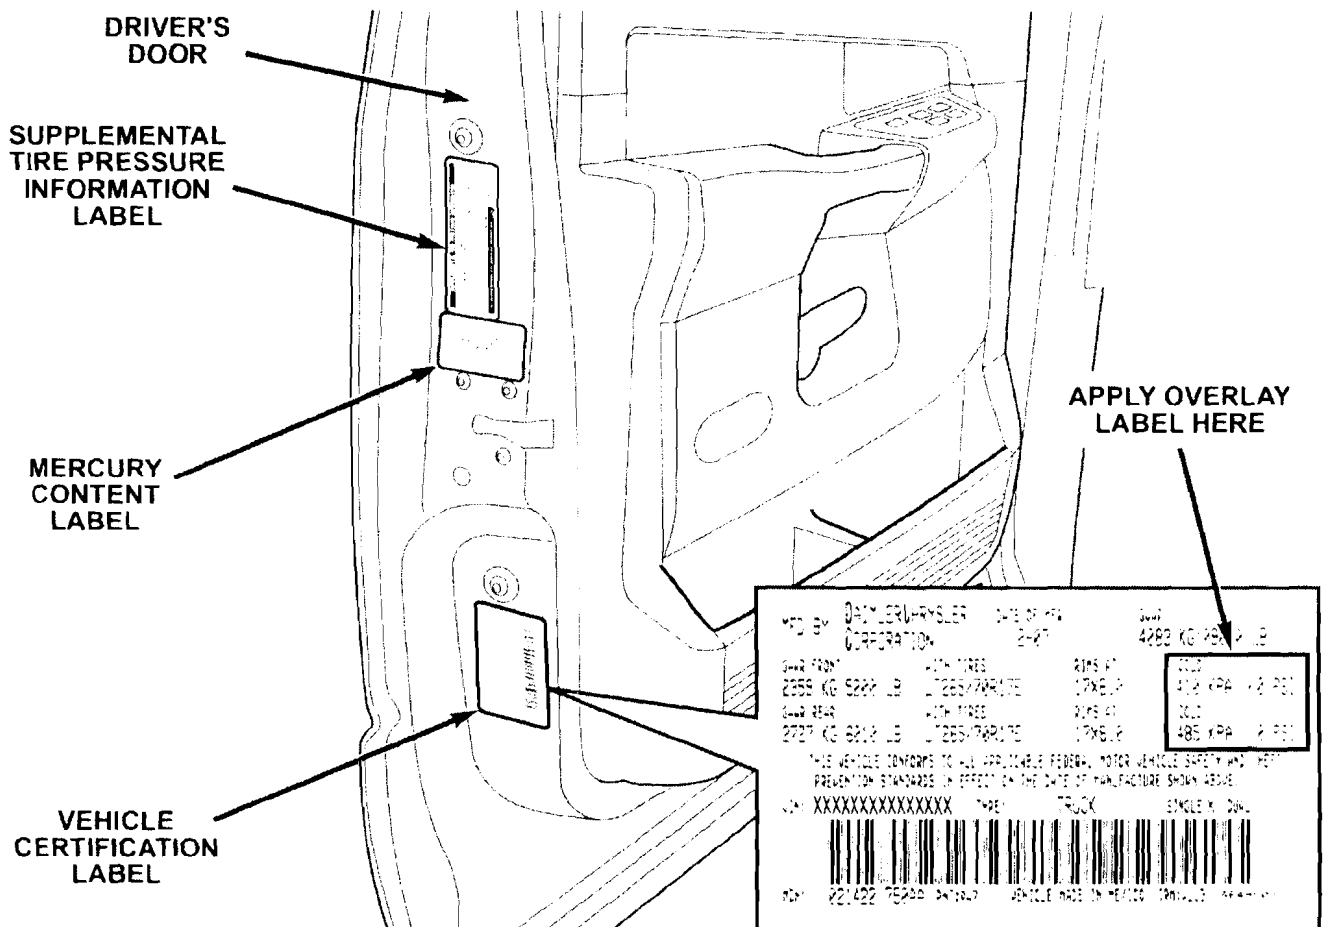


Figure 1

Service Procedure

7. Locate the Tire and Loading Information label on the “B” pillar (Figure 2).
8. Clean the existing Tire and Loading Information label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
9. Remove the Tire and Loading Information label overlay from its paper backing and carefully install it on the original label covering the incorrect tire inflation pressure information (Figure 2).

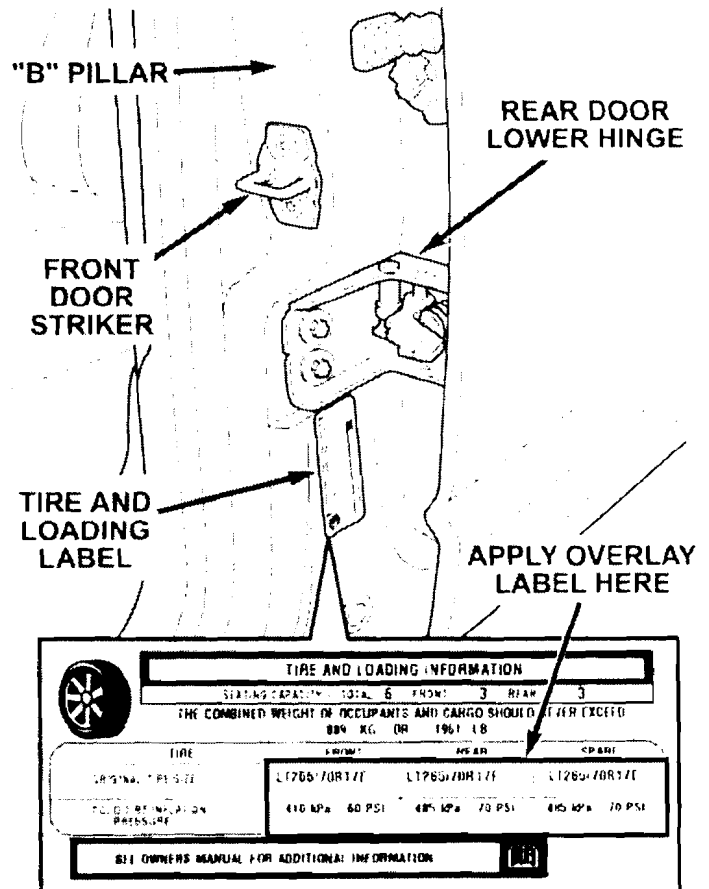


Figure 2 – Four Door Model Shown

Completion Reporting and Reimbursement

Claims for vehicles that have been serviced must be submitted on the DealerCONNECT Claim Entry Screen located on the Service tab. Claims submitted will be used by DaimlerChrysler to record recall service completions and provide dealer payments.

Use the following labor operation number and time allowance:

	Labor Operation Number	Time Allowance
Install Certification label overlay, Tire and Loading Information overlay and Supplemental Tire Pressure Information label	23-G1-01-82	0.2 hours

Add the cost of the recall parts package plus applicable dealer allowance to your claim.

NOTE: See the Warranty Administration Manual, Recall Claim Processing Section, for complete recall claim processing instructions.

Dealer Notification

All dealers will receive three copies of this dealer recall notification letter by mail. To view this notification on DealerCONNECT, select “Global Recall System” on the Service tab, then click on the description of this notification.

Owner Notification and Service Scheduling

All involved vehicle owners known to DaimlerChrysler are being notified of the service requirement by first class mail. They are requested to schedule appointments for this service with their dealers. A generic copy of the owner letter is attached.

Enclosed with each owner letter is an Owner Notification postcard to allow owners to update our records if applicable.

Dealers are encouraged to consider alternative scheduling and servicing approaches for this recall. This repair does not require hoists or other full service facility special equipment and is a DaimlerChrysler Mobile Service approved repair.

Vehicle Lists, Global Recall System, VIP and Dealer Follow Up

All involved vehicles have been entered into the DealerCONNECT Global Recall System (GRS) and Vehicle Information Plus (VIP) for dealer inquiry as needed.

GRS provides involved dealers with an updated VIN list of their incomplete vehicles. The owner's name, address and phone number are listed if known. Completed vehicles are removed from GRS within several days of repair claim submission.

To use this system, click on the “**Service**” tab and then click on “**Global Recall System.**” Your dealer's VIN list for each recall displayed can be sorted by: those vehicles that were unsold at recall launch, those with a phone number, city, zip code, or VIN sequence.

Dealers must perform this repair on all unsold vehicles before retail delivery. Dealers should also use the VIN list to follow up with all owners to schedule appointments for this repair.

Recall VIN lists may contain confidential, restricted owner name and address information that was obtained from the Department of Motor Vehicles of various states. Use of this information is permitted for this recall only and is strictly prohibited from all other use.

Additional Information

If you have any questions or need assistance in completing this action, please contact your Service and Parts District Manager.

Customer Services Field Operations
DaimlerChrysler Corporation

DAIMLERCHRYSLER

SAFETY RECALL G10 – TIRE INFLATION PRESSURE LABELS

Dear: (Name)

This notice is sent to you in accordance with the requirements of the National Traffic and Motor Vehicle Safety Act.

DaimlerChrysler Corporation has decided that some **2007 model year Dodge Ram 2500 Series 4x4 Pick Up truck models** fail to conform to Federal Motor Vehicle Safety Standard (FMVSS) No. 120 – Tire Selection and Rims for Motor Vehicles other than Passenger Cars.

The problem is...

The Certification label, Tire and Loading Information label, and Supplemental Tire Pressure Information label on your truck (VIN: xxxxxxxxxxxxxxxxx) contain incorrect tire inflation pressure information. Improper tire inflation pressure can cause tire failure and result in a crash without warning.

What you must do to ensure your safety...

- **We ask that you apply the enclosed Certification label overlay, Tire and Loading Information label overlay, and Supplemental Tire Pressure Information label so that they cover the original incorrect tire inflation pressure as described on the reverse side of this letter.**
- If preferred, you may contact your dealer to schedule a service appointment for installation of the labels. The service will be provided free of charge and should only take a few minutes to complete. However, additional time may be necessary depending on service schedules. Bring the enclosed three labels and this letter with you to your dealer. It identifies the required service to the dealer.

If you need help...

If you have questions or concerns which your dealer is unable to resolve, please contact DaimlerChrysler at 1-800-853-1403.

Please help us update our records, by filling out the attached prepaid postcard, if any of the conditions listed on the card apply to you or your vehicle. Be sure to print the last eight (8) characters of the VIN (VVVVVVVV) and notification code G10 on the postcard.

If your dealer fails or is unable to remedy this noncompliance without charge and within a reasonable time, you may submit a written complaint to the Administrator, National Highway Traffic Safety Administration, 400 Seventh Street, S.W., Washington, DC 20590, or call the toll-free Auto Safety Hotline at 1-888-327-4236.

We're sorry for any inconvenience, but we are sincerely concerned about your safety. Thank you for your attention to this important matter.

(over)

***Buckle up
for Safety***

Customer Services Field Operations
DaimlerChrysler Corporation
G10

Note to lessors receiving this recall: Federal regulation requires that you forward this recall notice to the lessee within 10 days.

Installation Instructions for Tire Pressure Labels

1. Open the driver's door and locate the Certification label on the driver's door as shown in Figure 1.
2. Clean the existing Certification label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
3. Remove the enclosed Certification label overlay from its paper backing and carefully install it on the Certification label, covering the incorrect tire inflation pressure information (Figure 1). Firmly press and smooth the label to the surface of the Certification label to ensure good adhesion.
4. Locate the Supplemental Tire Pressure Information label on the driver's door (Figure 1).

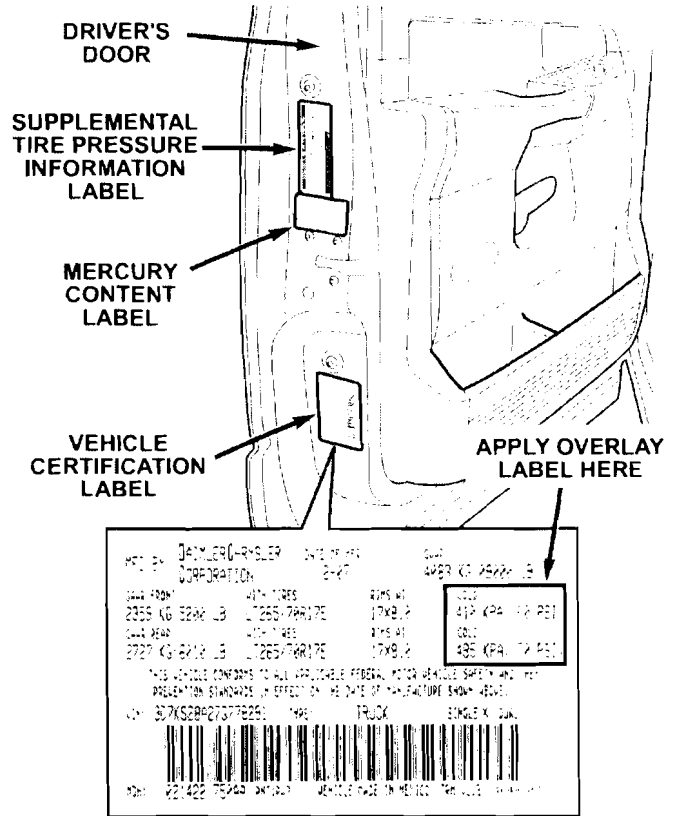


Figure 1

5. Clean the existing Supplemental Tire Pressure Information label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
6. Remove the enclosed Supplemental Tire Pressure Information label from its paper backing and carefully install it over the original label (Figure 1).
7. Locate the Tire and Loading Information label on the "B" pillar (Figure 2).
8. Clean the existing Tire and Loading Information label by wiping it with a household cleaner to remove any dirt, oil residue or grease.
9. Remove the enclosed Tire and Loading Information label overlay from its paper backing and carefully install it on the original label covering the incorrect tire inflation pressure information (Figure 2).

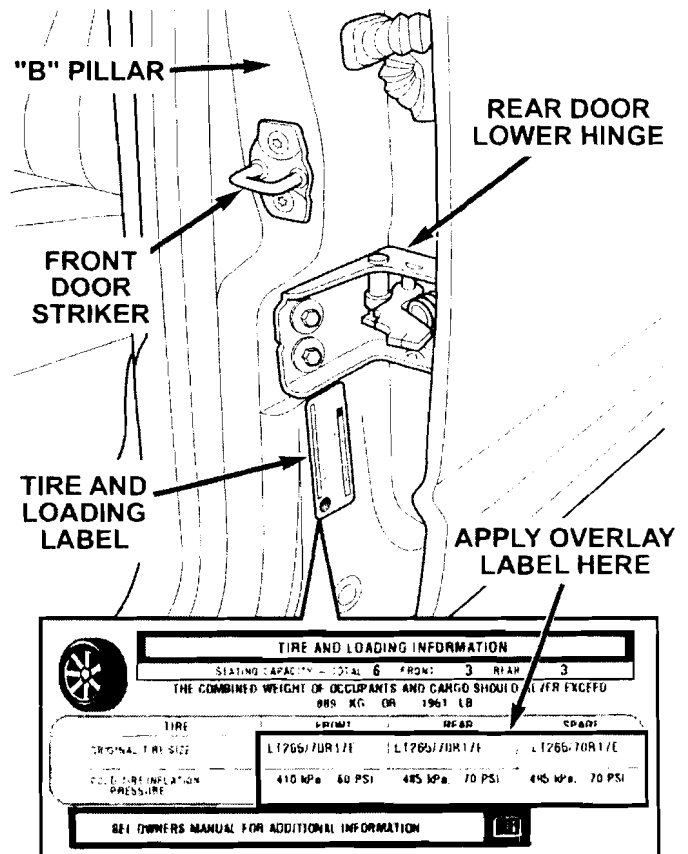


Figure 2 – Four Door Model Shown