

SERVICE ADVISORY # 08- 100**Fuzion Propane Line Replacement**

Keystone RV Company is conducting a voluntary RECALL notification campaign in accordance with the National Traffic and Motor Vehicle Safety Act. The vehicles subject to this recall campaign have been manufactured with excess length in the propane hose for the slide room allowing the hose to droop too close to the tire. The propane line may become damaged as a result of contact with the tire. A propane leak, in the presence of an ignition source, could result in a fire and/or explosion causing property damage and/or personal injury.

Models Included: 2007 – 2008 Fuzion 373 Fifth Wheel

Serial Number Range: 2007 – 4YDF3732227F810113, 4YDF373297F810268

2008 – 4YDF373298F810000 – 4YDF373268F810519

Parts Required per Unit:

KRV # 221375 Hose LP 68" 3/8" F.SAE x 1/2" F.SAE -1

Tools Required:

- Screw gun - 3/8 Socket bit - Utility knife
- Open End Wrenches; 3/4", 7/8", 15 /16"

INSTRUCTIONS**ONE: PREPARING THE TRAILER**

Step 1. Locate the trailer on a level, flat and hard surface. Chock the wheels.

Step 2. Extend kitchen slide to the out position.

Step 3. Disconnect the shore cord and negative lead from the battery.

WARNING – FAILURE TO REMOVE ALL SOURCES OF ELECTRICAL POWER CAN RESULT IN AN EXPLOSION, FIRE AND PERSONAL INJURY.

Step 4. Shut off the propane valves on both LP bottles.

WARNING – LP GAS IS HIGHLY FLAMMABLE. FAILURE TO SHUT OFF THE PROPANE CAN RESULT IN AN EXPLOSION, FIRE AND PERSONAL INJURY.

TWO: REMOVE LP FLEX HOSE

Step 1. Remove kitchen slide LP flex hose from main LP manifold. See figure 1.

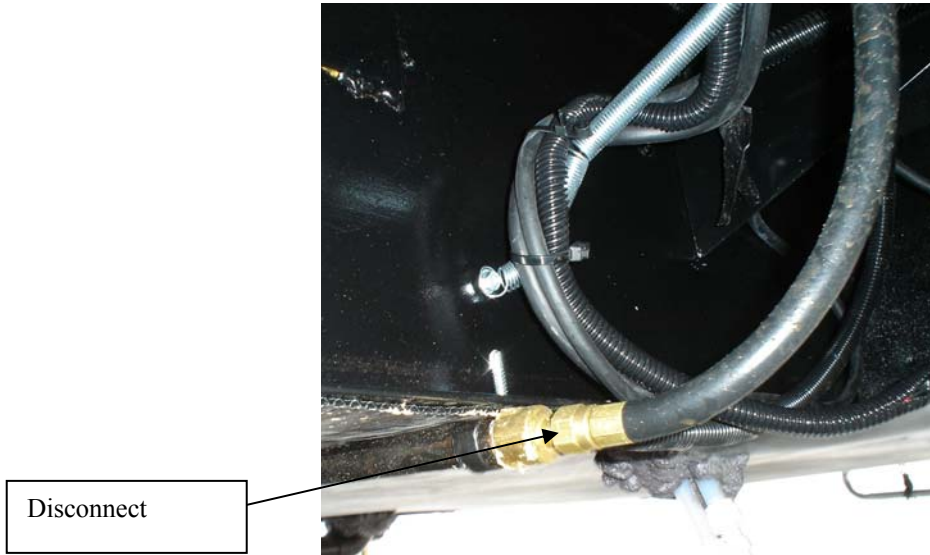


Fig. 1

Step 2. Remove LP flex hose from LP manifold on the kitchen slide out room. See figure 2.

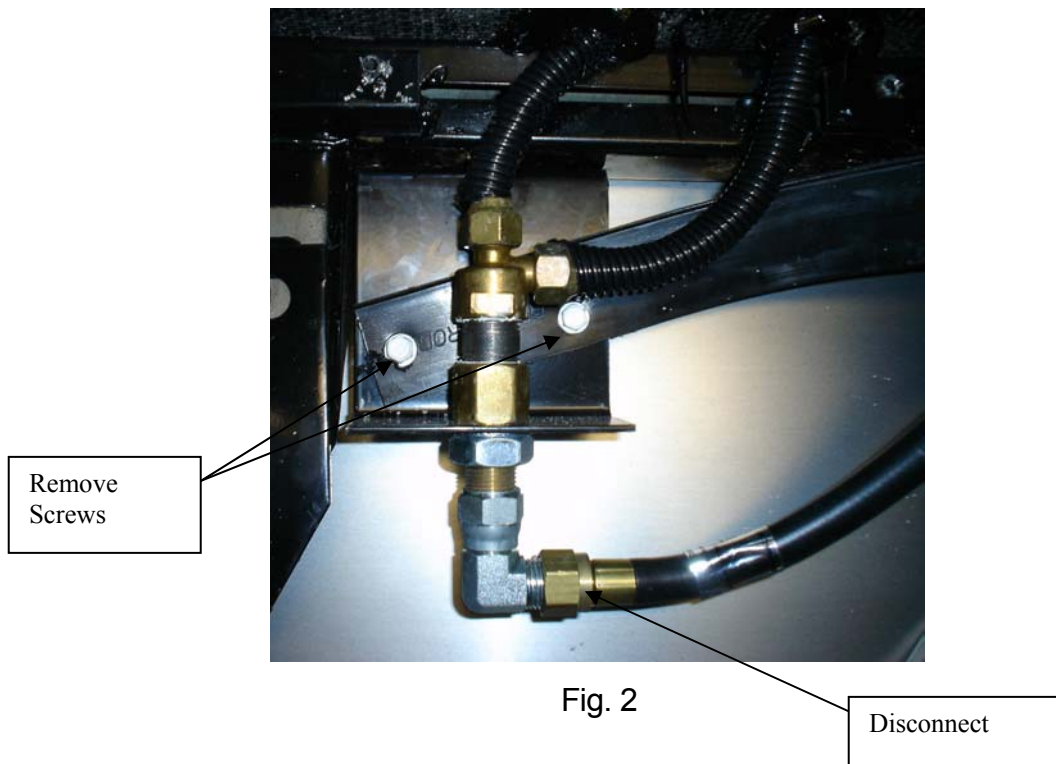


Fig. 2

Step 3. Remove LP flex hose from the flex guard and discard.

Step 4. Remove the 2 screws holding the flex guard to the LP mounting bracket on the slide room. See Fig 2.

THREE: INSTALL NEW LP FLEX HOSE

- Step 1.** Install new 68 3/8" LP hose in flex guard assembly.
- Step 2.** Install flex hose on LP manifold on slide out room.
- Step 3.** Install flex hose on main LP manifold.
- Step 4.** Reposition the flex guard to remove any play between flex guard and the LP hose. See figure 3. Cut off excess flex guard. Refasten the flex guard to the LP mounting bracket on the kitchen slide out.

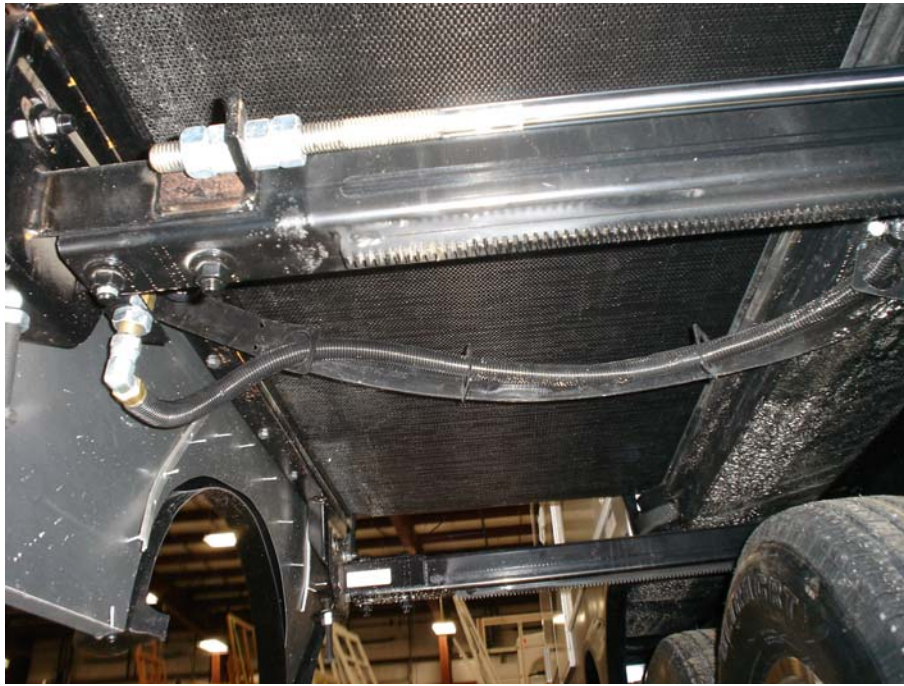


Fig. 3

- Step 5.** Run the room to the in (travel) position. Verify there is now 3" clearance between the tire and the propane hose flex guard when the suspension is at rest position. The unit must be parked on a flat surface and level.
- Step 6.** Perform a LP Drop Pressure Test.
- Step 7.** Turn the propane on at the LP bottles. Check the LP connections for leaks with a commercial leak test solution.
- Step 8.** Reconnect the 110v and 12v power.

WARRANTY REIMBURSEMENT

Submit the claim on Key Express or on a Keystone Warranty claim form with **Service Advisory # 08- 100** and **Flat Rate Code # 7110042B** noted in the customer complaint section of the form. The amount of time authorized for this repair is 1.0 hours.

If you have any questions, please call Keystone RV Customer Service at **(866) 273-1450**.