




# Technical Service Bulletin

	Model	SONATA (EF)
	Group	BODY (INTERIOR & EXTERIOR)
	Number	91B032
Subject  CHROMIUM-PLATED DOOR INSIDE HANDLE REPAIR	Date	August, 2009
	Area	Puerto Rico
	Type	Safety Recall

## 1. DESCRIPTION

This bulletin provides the procedure for repairing SONATA (EF) door inside handle whose outer chromium plating may peel off.

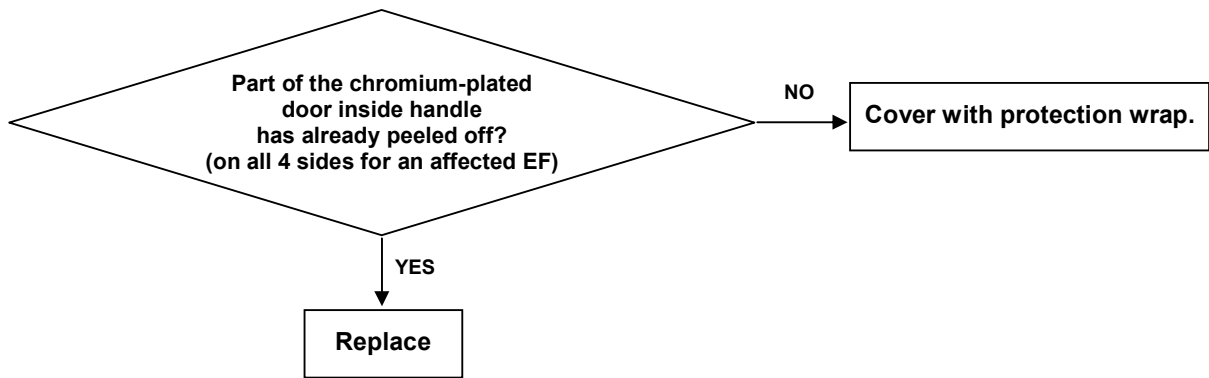

## 2. APPLICABLE VEHICLES

- Model: SONATA (EF)
- Applicable vehicle production date range: From Jan. 28, 2002 to Mar. 22, 2003
- Applicable VIN range: Use “JWalk” Screen to verify applicable VIN.
- Area: Puerto Rico

### 3. PARTS REQUIRED

1) Door inside handle

Part Name	Part No.
Handle Assembly – Door Inside, LH	82610-3D010QQH
Handle Assembly – Door Inside, RH	82620-3D010QQH

2) Protection film

Part Name	Part No.
Protection Wrap – Door Inside Handle	82610-3D030QQH

### 4. OPERATION CODE AND TIME

OP Code	OP Name	OP Time	N Code	C Code
91B032R0	DOOR INSIDE HANDLE REPAIR, 4 WRAPPING	0.3 M/H	N54	C04
91B032R1	DOOR INSIDE HANDLE REPAIR, 1 REPLACEMENT & 3 WRAPPING	0.4 M/H		
91B032R2	DOOR INSIDE HANDLE REPAIR, 2 REPLACEMENT & 2 WRAPPING	0.6 M/H		
91B032R3	DOOR INSIDE HANDLE REPAIR, 3 REPLACEMENT & 1 WRAPPING	0.8 M/H		
91B032R4	DOOR INSIDE HANDLE REPAIR, 4 REPLACEMENT	0.9 M/H		


N54: Poor Plating, C04: Peeling, Come-off

### 5. SERVICE PROCEDURE


- Check if part of a chromium-plated door inside handle has already peeled off on an affected vehicle. (Carry out the visual inspection on all 4 doors.)
  - If yes, replace it with new one with reference to a SONATA (EF) shop manual.
  - If not, cover it with the protection wrap according to the below procedure.




2. Peel the protection wrap off the backing.

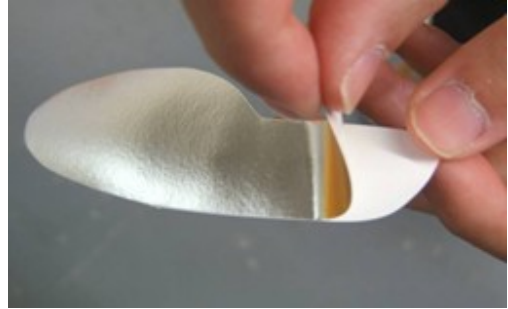

3. Cover the door inside handle with the protection wrap.

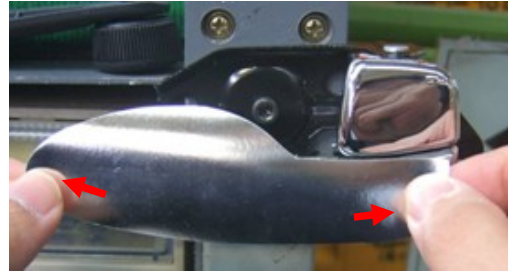


4. Stretch the protection wrap tight in the arrow direction on the front side of the inside handle.

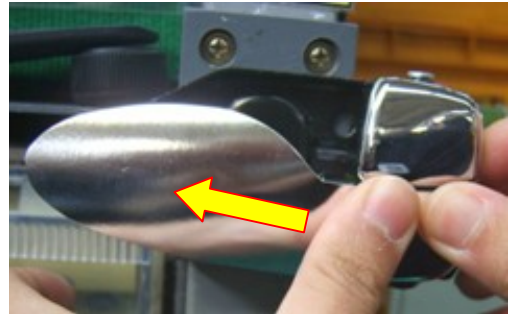

5. Stretch the protection wrap tight in the arrow direction on the upper side of the inside handle.



6. Turn back the upper edge of the protection wrap toward the back of the door inside handle, then stretch it tight.

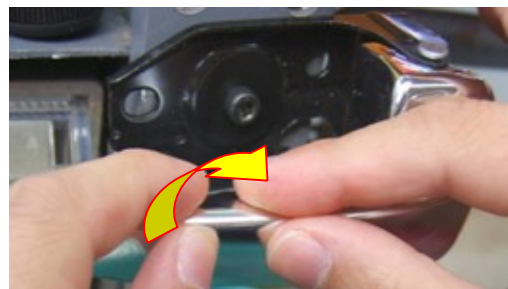

7. Check if the protection wrap is properly attached on the door inside handle, then rub it gently and evenly again.

