



INSTRUCTIONS TO PERFORM CAMPAIGN 113

Models Affected:

- 2007 and 2008 model year Winnebago® (Models: Access®, Aspect®, Sightseer®, and Vista®)
- 2007 and 2008 model year Itasca® (Models: Impulse®, Cambria®, Sunova®, and Sunstar®)
- 2009 and 2010 model year Winnebago (Models: Access, Sightseer, and Vista)
- 2009 and 2010 model year Itasca (Models: Impulse, Sunova, and Sunstar)

These motor homes were manufactured January 25, 2007 through July 17, 2009.

Tools Required:

- Screw Gun (w/#2 Phillips Tip)
- 5/8" and 13/16" Open-End Wrench
- Stapler (Office Stapler)
- LP Leak Detector Solution


Kit Includes:

- Stove Enclosure
- Instructions


Procedure:

Install a stove enclosure that isolates the stove from the furnace air return.


1. Shut off the LP gas on outside of coach. See Photo A.

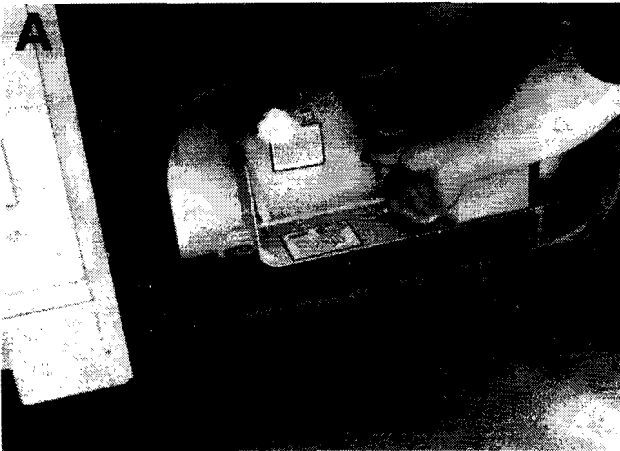


2. Remove range top and set aside. See Photo B.

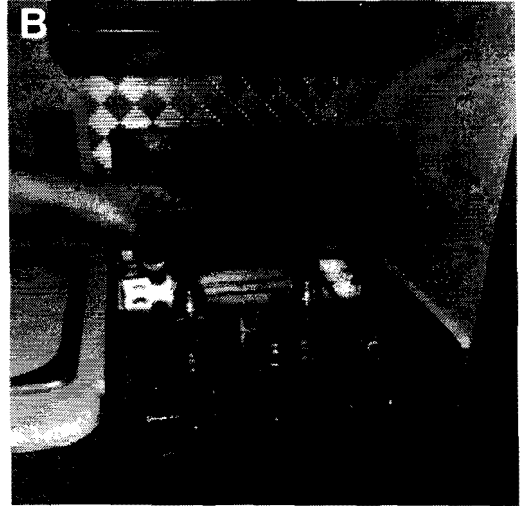

3. Remove four screws to loosen range for removal (two on each side). See Photo C.

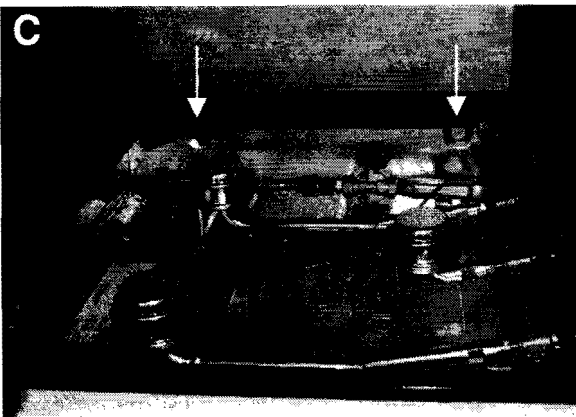



4. Using a 5/8" and 13/16" open-end wrench, loosen and disconnect the LP gas line. See Photos D and E.

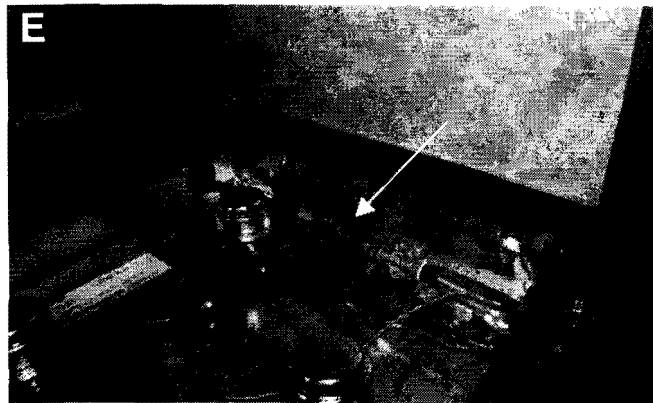


5. Remove range and set aside. See Photo F.




6. Using the perforated lines, fold the stove enclosure into rectangular position and staple to hold shape, making sure the outer lip is stapled to the outside of the stove enclosure. See Photo G and illustration.

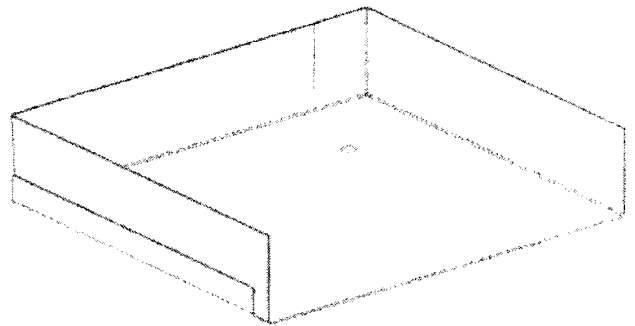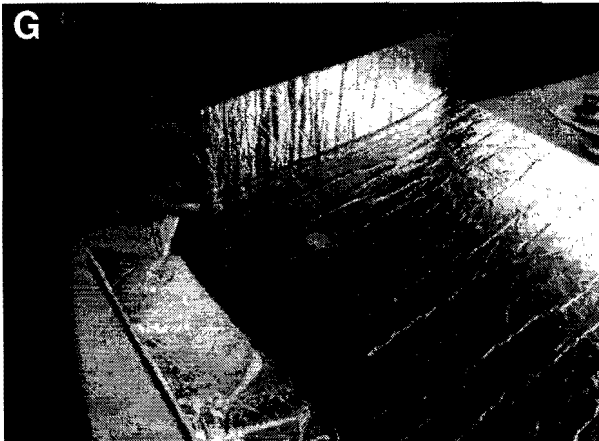


7. Insert stove enclosure (making sure to bring the LP gas line through the stove enclosure slit) and attach to all sides of the countertop/cabinet assembly using a stapler to hold the stove enclosure in place. See Photos H and I.

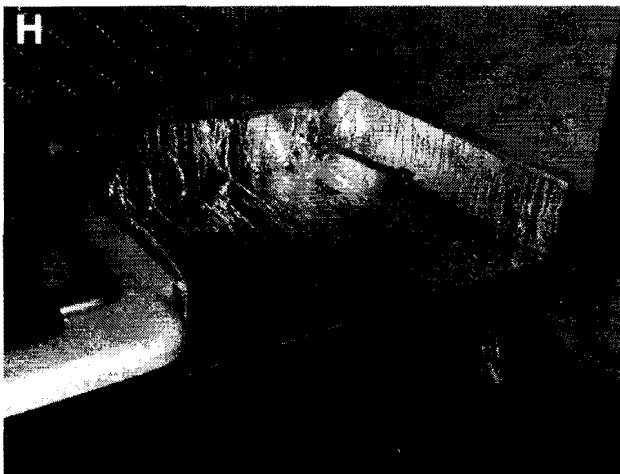


8. Reinstall range and four screws (two on each side) to secure range into place. See Photos J and K.

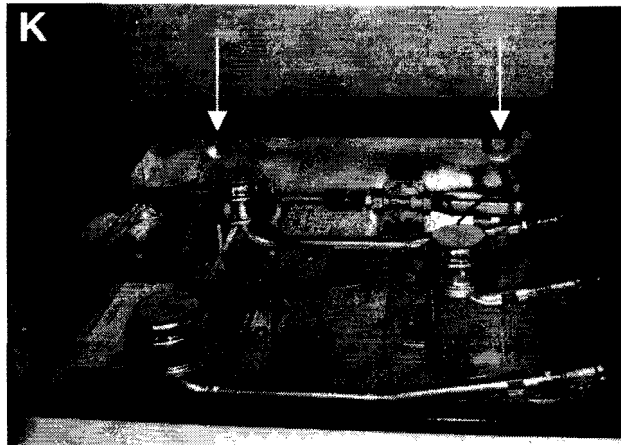

9. Reconnect LP gas line. See Photo L.

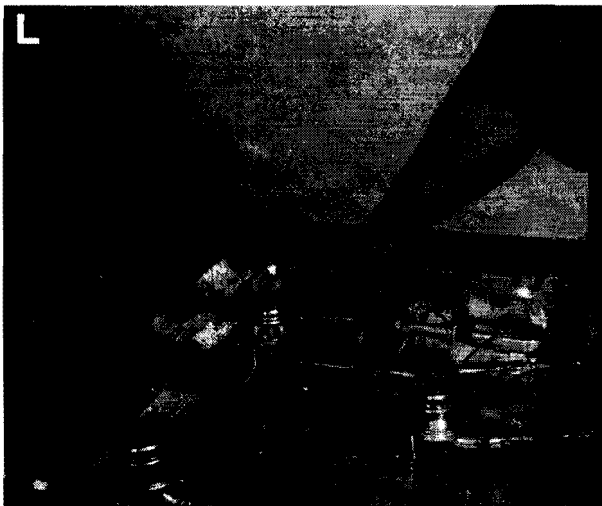

10. Open the LP gas valve on the outside of the coach. See Photo M.

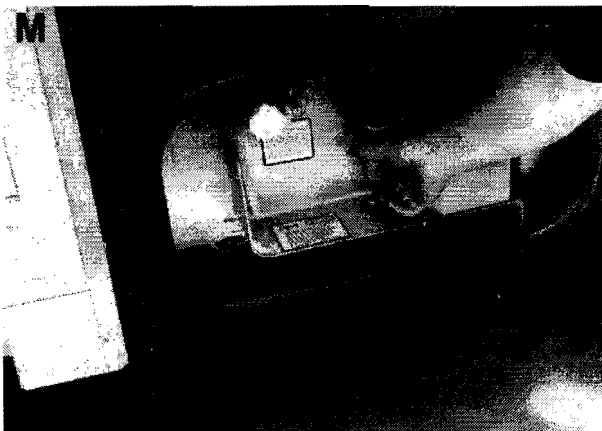

11. Perform an LP leak test by spraying LP leak detector solution on the LP gas line fitting. See Photo N.



12. Reinstall range top. See Photo O.

