



## INSTRUCTIONS TO PERFORM CAMPAIGN 114 (REVISED, 1/27/10)

**NOTE:** Campaign 114 instructions have been revised. Please disregard previous instructions.

### Models Affected:

- Certain 2010 model year Winnebago View® and Itasca Navion® motor homes.

These motor homes were manufactured from November 12, 2009 through December 16, 2009.

### Tools Required:

- Impact Air Wrench
- 14mm Socket
- 14mm Wrench
- 12-pt. 7/16 Socket
- Torque Wrench
- Wire Cutter


### Kit Includes:

- Driver and Passenger Cab Seat Swivel Plates
- (8) Bolts – M10 1,5 Short
- (8) Bolts – M10 1,5 Long
- Instructions

### Procedure:

Replace the driver and passenger cab seat swivel plates.

1. Release seat lever (located on front of the cab seat) and push seat all the way back to access the front bolts/nuts. See Photo A.

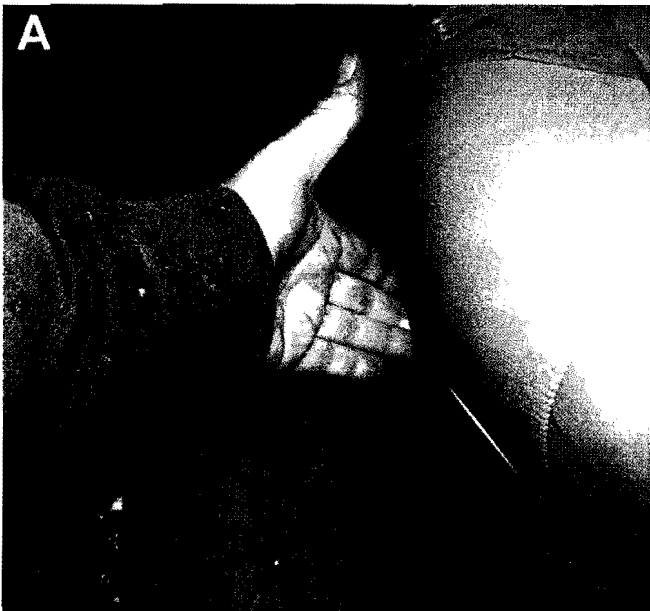


2. Remove two sets of bolts/nuts (one set on each side of the front seat glide brackets) and set aside. See Photo B.



3. Release seat lever (located on front of the cab seat) and push seat all the way forward to access the rear bolts/nuts.
4. Remove two sets of bolts/nuts (one set on each side of the back seat glide brackets) and properly dispose of. See Photo C.



5. Carefully remove cab seat and set aside (within coach). See Photo D.

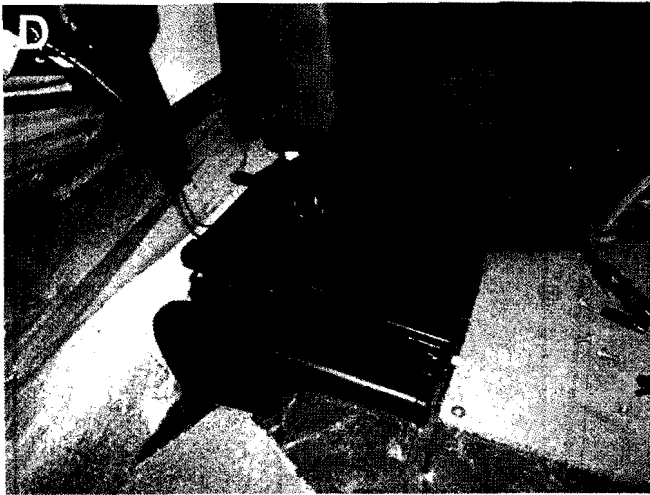

*NOTE: When removing the cab seat, be sure not to drag the glide brackets (located on the bottom of the seat) to avoid possible interior damage.*

*DO NOT ALTER THE SEAT BELT INSTALLATION – LEAVE ATTACHED.*

6. Remove black utility tape on seat power cable and disconnect yellow connector ends. See Photos E and F.



7. The seat pedestal on your coach may have a wire tie installed to secure the cab seat swivel plate lever. If so, use a wire cutter to cut the wire tie and remove. See Photo G.


If no wire tie is installed, proceed to Step 8.




8. Release cab seat swivel plate lever (located on back side of the swivel plate) and rotate swivel plate to expose bolts. See Photo H.



9. Remove the four bolts securing the cab seat swivel plate to the pedestal (one on each corner of the swivel plate) and properly dispose of. See Photo I.

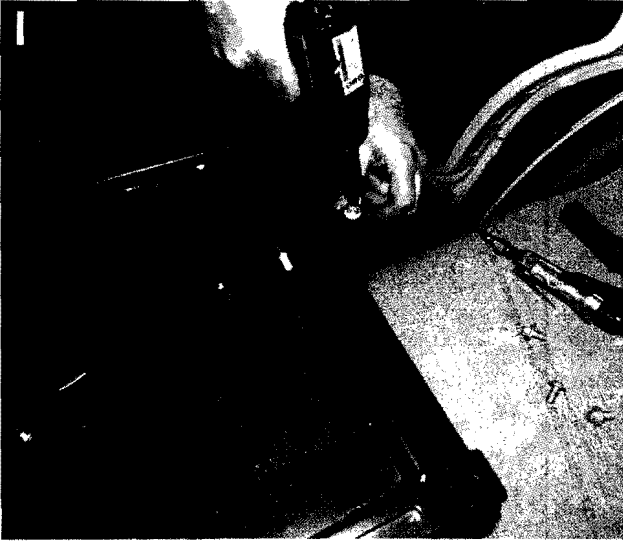


10. Remove incorrect cab seat swivel plate from seat pedestal and set aside. See Photo J.

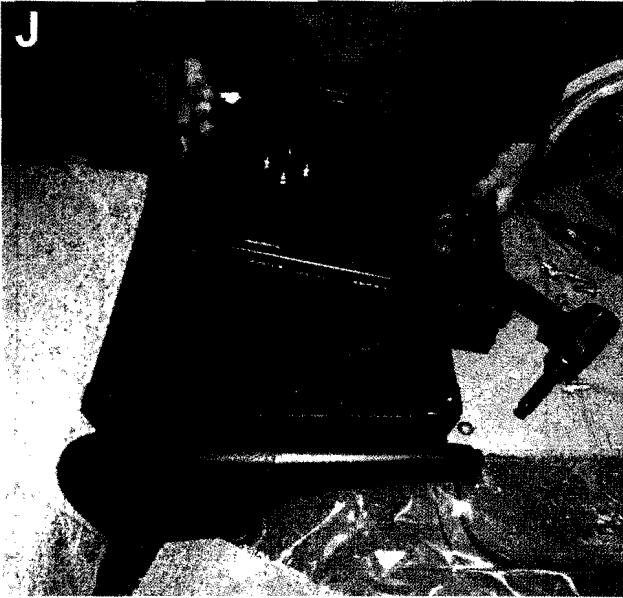


11. Install correct cab seat swivel plate onto seat pedestal (making sure that the seat adjust handle is located to the door side of the coach) and thread seat power cable up through hole. See Photo K.

Seat Adjust Handle  
(located to the door  
side of the coach)

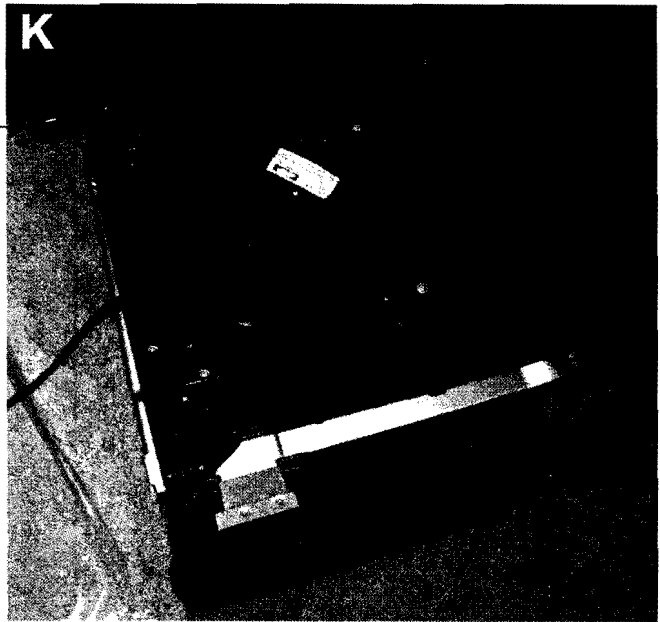



12. Reconnect yellow connector ends and reinstall black utility tape. See Photos L and M.

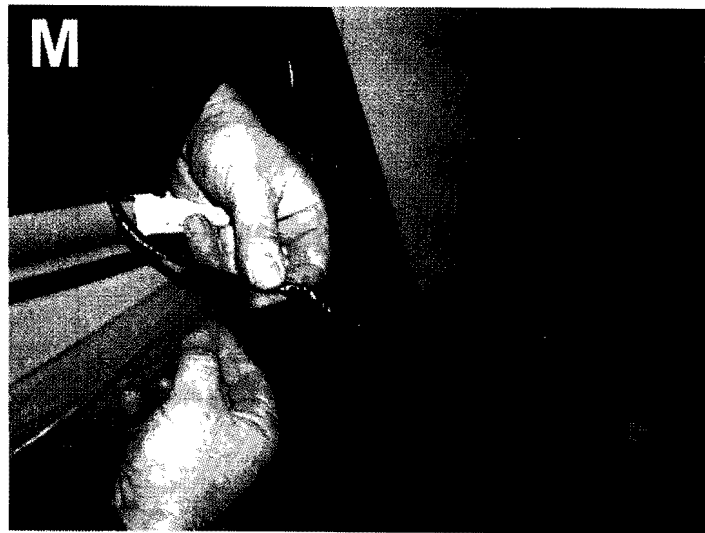

13. Rotate cab seat swivel plate and install the four bolts from kit, securing the cab seat swivel plate to the pedestal (one on each corner of the swivel plate). Finger-start these bolts and keep loose (temporarily) to align all four holes. See Photo N.



14. Tighten the four bolts and torque to  $28 \pm 3$  ft.-lbs. See Photos O and P.

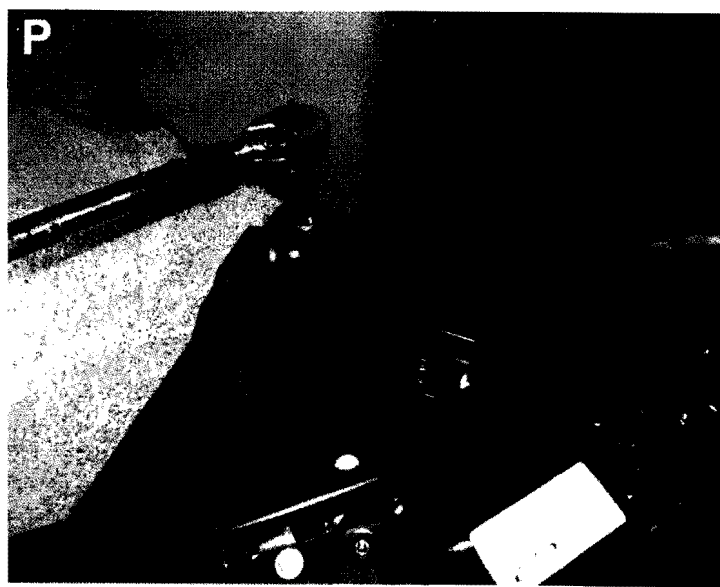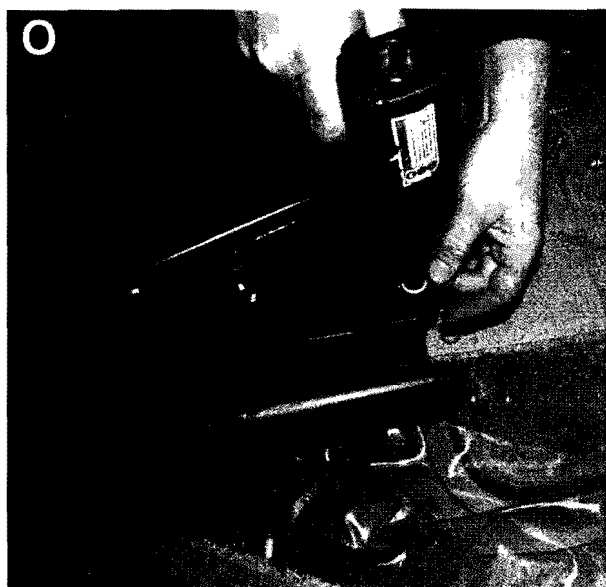

15. Rotate cab seat swivel plate back into place and reinstall cab seat. See Photo Q.



*NOTE: When reinstalling the cab seat, be sure not to drag the glide brackets (located on the bottom of the seat) to avoid possible interior damage.*

16. Align the glide brackets with the cab seat swivel plate and finger-start each of the four bolts. See Photo R.



17. Tighten the four bolts and torque to  $28 \pm 3$  ft.-lbs. See Photos S and T.



18. Repeat steps to replace cab seat swivel plate on second cab seat.