

NHTSA#: 13V-277

TC#: 2013-224

Job Code: 9901114

Flat Rate: 0.3

**PARTS ARE ENCLOSED WITH THE NOTIFICATION**

**ACTION REQUIRED:**

Replace the tire label, carrying capacity label and the (Canada only) capacity portion of the Federal label

**MODELS / UNITS:**

**2014 TRAVEL TRAILERS**

Launch Ultra Lite

21FBS **E2JR** 5051-5082; 5084-5092

**KIT CONTENTS**

- Instruction sheet
- Tire label
- Carrying capacity label
- Capacity portion of the Federal Label - Canadian Dealers only

**TOOLS/MATERIAL REQ.:**

- Isopropyl Alcohol
- Shop Rag

**Instructions**

**Remove the existing tire label**

1. Locate the tire label on the outside off door side (road side) front of the unit. Remove the existing tire label from the unit and discard it.
2. Using isopropyl alcohol and a shop rag, remove any adhesive residue from the surface where the original label had been. Allow the area to dry for at least 30 seconds.

**Apply the new tire label**

3. Remove the protective back from the new tire label. Align the new label in the same location of the original label and apply it to the surface. Remove any air bubbles from the label. Repeat this process for the second label.

**NOTE: Do not attempt to remove or adjust the label once it has come into contact with the surface. Doing so may damage the label or cause it not to adhere properly to the surface. IF A LABEL IS DAMAGED OR WILL NOT PROPERLY ADHERE TO THE SURFACE, A NEW LABEL MUST BE ORDERED.**



Tire label


**Remove the existing carrying capacity label**

1. There are (2) yellow carrying capacity labels. One is located on the outside off door side (road side) front of the unit, next to the Federal label. The second one is on the main entrance door. Remove the yellow label from both of these locations and discard them.
2. Using isopropyl alcohol and a shop rag, remove any adhesive residue from the surface where the original label had been. Allow the area to dry for at least 30 seconds.

**Apply the new carrying capacity label(s)**

3. Remove the protective back from the new yellow carrying capacity label. Align the new label in the same location of the original label and apply it to the surface. Remove any air bubbles from the label. Repeat this process for the second label.

**NOTE: Do not attempt to remove or adjust the label once it has come into contact with the surface. Doing so may damage the label or cause it not to adhere properly to the surface. IF A LABEL IS DAMAGED OR WILL NOT PROPERLY ADHERE TO THE SURFACE, A NEW LABEL MUST BE ORDERED.**

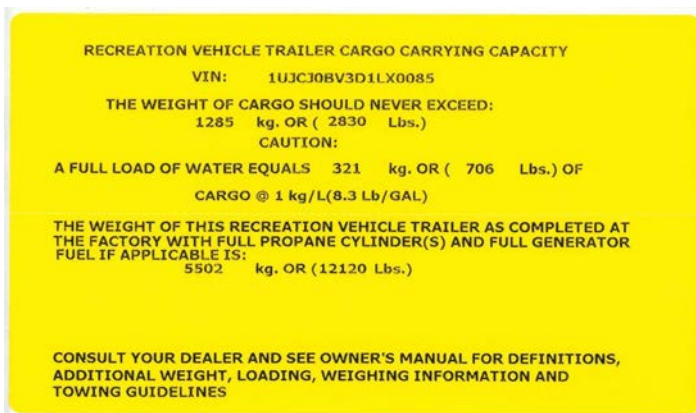

Carrying capacity label

**Canadian Dealers Only**


**Remove the existing carrying capacity portion of the Federal label**

1. Locate the existing carrying capacity portion of the Federal label on the outside off door side (road side) front of the unit. Remove the carrying capacity portion of the Federal label.
2. Using isopropyl alcohol and a shop rag, remove any adhesive residue from the surface where the original label had been. Allow the area to dry for at least 30 seconds.

**Apply the new carrying capacity portion of the Federal label(s)**

3. Remove the protective back from the new carrying capacity label. Align the new label in the same location of the original label and apply it to the surface. Remove any air bubbles from the label. Repeat this process for the second label.

**NOTE: Do not attempt to remove or adjust the label once it has come into contact with the surface. Doing so may damage the label or cause it not to adhere properly to the surface. IF A LABEL IS DAMAGED OR WILL NOT PROPERLY ADHERE TO THE SURFACE, A NEW LABEL MUST BE ORDERED.**

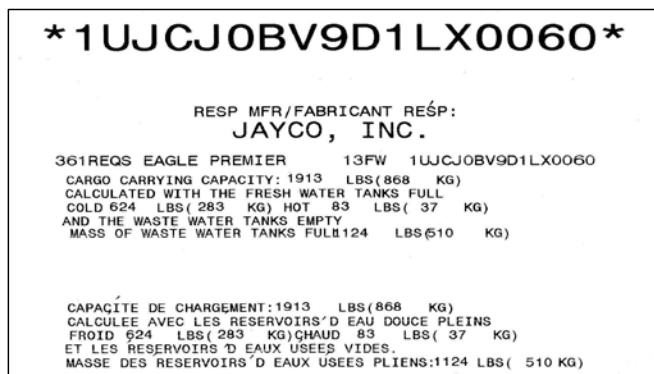

Canadian Carrying Capacity Label