

Repair Instructions

- 1) Turn red battery switch at front of trailer to off position to eliminate 12 volt power to refrigerator.




- 2) Close LP gas tanks and purge LP from system by lighting and burning cook top burner until it no longer burns.



- 3) Disconnect shore power from trailer.



- 4) Remove exterior refrigerator vent and disconnect 110, 12 volt, and LP from back of refrigerator to prepare for removing refrigerator from cabinet.

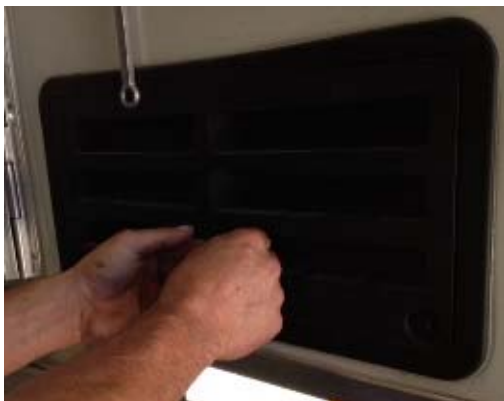

- 5) Remove refrigerator from cabinet. Remove caps to access screws. Remove screws and back refrigerator out of cabinet. Use precaution to avoid damage to flooring of trailer. A piece of carpet or thick fabric works well. Retain screws and caps for reinstallation.



- 6) Remove recessed cook top from countertop.
A) Remove knobs, mounting screws and washers, and grates and retain for reinstallation.



- B) Remove inner cook top panel.



C) Disconnect LP line from cook top.



D) Remove screws from inner pan of cook top and remove from counter.



- 7) Some models have a small opening in the wall accessing plumbing to the adjacent kitchen sink. This opening needs to be covered using the supplied 8"x20" piece of paneling. This piece will have to be cut to fit. Staple to wall, covering opening, avoiding plumbing and seal edges with caulk.
- 8) Install aluminum side plate, provided. Cut or notch out plate as needed to accommodate items such as sink brackets.

Install using ½" screws provided.



- 9) Install large aluminum pan, provided. Fasten to underside of counter top with one edge sliding under already install side plate and closing in opening for recessed cook top. Install using ½" screws provided. Cut or notch as needed to accommodate items such as brackets. Pan will be a tight fit and may need to be maneuvered into place. Fish LP line into hole before fully reaching bottom of counter top.



- 10) Use Expandafoam to seal all seams and openings of pan. Do this inside the pan and outside the pan through the refrigerator vent opening.



11) Reinstall cook top, reversing removal instructions. Line up LP line back through hole and reconnect.



12) Reinstall refrigerator. Reconnect 110, 12 volt, and LP. Extend refrigerator drain tube through outside vent.



- 13)** Add Expandafoam around refrigerator as needed to areas that were torn during removal of refrigerator.



- 14)** A LEAK TEST MUST BE COMPLETED ON THE LP SYSTEM. PRIOR TO TURNING 110 OR 12VOLT SYSTEMS BACK ON A YOU MUST COMPLETE A WATER COLUMN OR PRESSURE TEST ON THE LP SYSTEM AND IT MUST PASS. If the system fails the leak test the leak must be identified and corrected.

- 15)** Turn on refrigerator and test for proper operation on LP and 110 systems.

- 16)** Test cook top for proper operation.

- 17)** Submit billing to:

Lakota Trailers
PO Box 219
Bristol IN 46507
Attn: AJ
Fax (574) 848-1467
Phone (574) 848-1636

LAKOTA CORP – PO BOX 219 – 4 STOUTCO DRIVE – BRISTOL, IN 46507
PHONE: 574-848-1636 FAX: 574-848-1467
WWW.LAKOTATRAILERS.COM