

SAFETY ADVISORY # 14-219

Laredo Mini Breaker Relocation

Keystone RV Company is conducting a voluntary RECALL notification campaign in accordance with the National Traffic and Motor Vehicle Safety Act. It has been decided a 12V mini breaker is located too close to the propane cylinder. If the propane bottle rubs against the rubber boot it may wear through and cause a short leading to an increased risk of fire and personal injury. This safety advisory explains how to correct the installation.

Models Included: 2015 Laredo Travel Trailers

Serial Number Range: FK600718 – FK601480

Note – Check serial number on Key Express to verify the campaign is open.

Parts Required: (1) Screw - #8 - 1" - Pan - Quad - Black - Tek2 – Pick up local

Tools required: - Screw Gun with #2 Square Bit

REPAIR INSTRUCTIONS

ONE: Relocate mini breaker

Step 1 Locate the propane cylinders at the front of the unit. Remove the cover, and right side propane cylinder. See figure 1.



Relocate
rear breaker
forward

Fig. 1

Step 2

Remove the two screws holding the rear mini breaker to the A frame. Reposition the mini breaker forward so the rear mounting hole of the mini breaker is now aligned with the front screw hole and secure to the frame. Add a screw to the front mounting hole of the mini breaker and to the hole which is no longer being used. See figure 2.

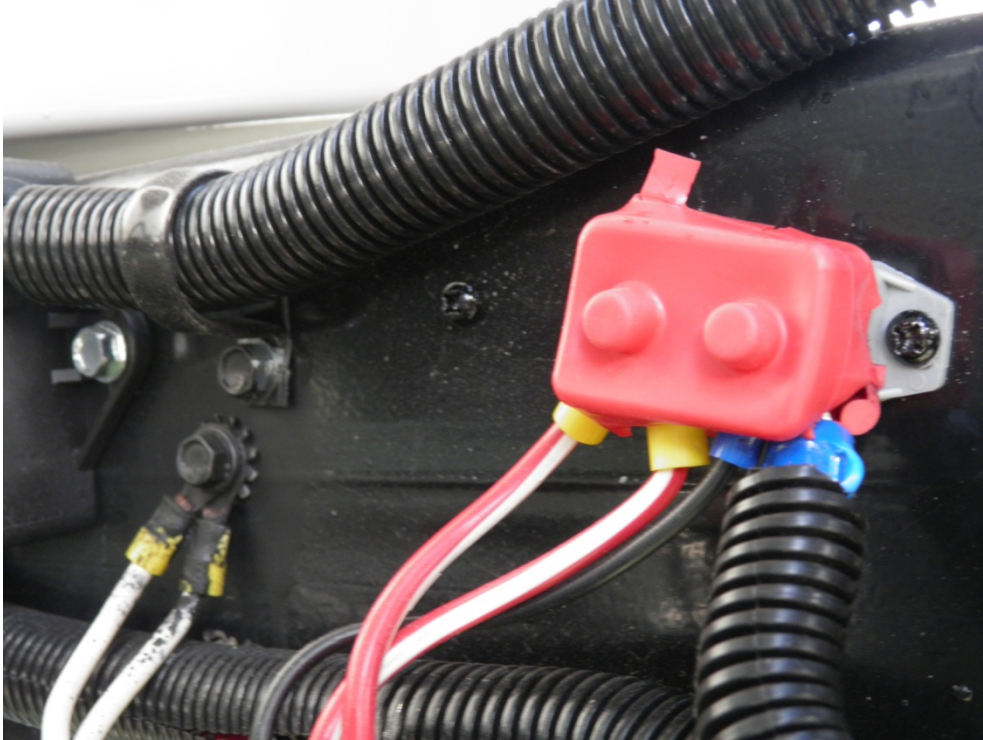


Fig. 2

Step 3

Reinstall the propane cylinder and verify it will not contact the breaker. Reinstall the cover.

TWO:**WARRANTY REIMBURSEMENT**

Submit the claim on Key Express using **Flat Rate Code # 7121942A** with Safety Advisory # 14-219 noted in the customer complaint section of the form. The amount of time authorized for this repair is 0.3 hours.

Please call Keystone Customer Service at **(866) 273-1456** if you have any questions.