



VOLUNTARY RECALL CAMPAIGN

Classification: RS17-022F	Reference: NTB17-037F	Date: July 25, 2023
------------------------------	--------------------------	------------------------

VOLUNTARY SAFETY RECALL CAMPAIGN 2007-2012 VERSA; FRONT PASSENGER AIR BAG INFLATOR

This bulletin has been amended. See AMENDMENT HISTORY on the last page.
Please discard previous versions of this bulletin.

CAMPAIGN ID #s: PM657, PM665, PM676, PM818, PM823, and PM826

APPLIED VEHICLES: 2007 – 2011 Versa Sedan (C11)
2007 – 2012 Versa Hatchback (C11)

- There are six (6) Campaign ID numbers for this Campaign.
- Each Campaign ID number is assigned to specific vehicles (VINs).
- Use the VIN and Service COMM or Dealer Business Systems (DBS) to confirm campaign eligibility and select the correct ID #.

INTRODUCTION

Nissan is conducting this Voluntary Safety Recall Campaign on certain specific 2007-2012 Versa vehicles to replace the front passenger air bag inflator. This service will be performed at no charge to owners for parts or labor.

TK Services and RXO Logistics have issued return packaging, shipping labels, documents, and directions that must be used and followed in order to properly carry out this campaign. Information on this documentation is provided in this bulletin.

IDENTIFICATION NUMBER


Nissan has assigned identification numbers PM657, PM665, PM676, PM818, PM823 and PM826 to this campaign. The correct campaign ID number must appear on all communications and documentation of any nature dealing with this campaign.

DEALER RESPONSIBILITY

It is the dealer's responsibility to check Service COMM or Dealer Business Systems (DBS) National Service History for the campaign status on each vehicle falling within the range of this voluntary safety recall campaign which for any reason enters the service department. This includes vehicles purchased from private parties or presented by transient (tourist) owners and vehicles in a dealer's inventory. **Federal law requires that new vehicles in dealer inventory which are the subject of a safety recall must be corrected prior to sale. Failure to do so can result in civil penalties by the National Highway Traffic Safety Administration.** While federal law applies only to new vehicles, Nissan strongly encourages dealers to correct any used vehicles in their inventory before they are retailed.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

REPAIR OVERVIEW

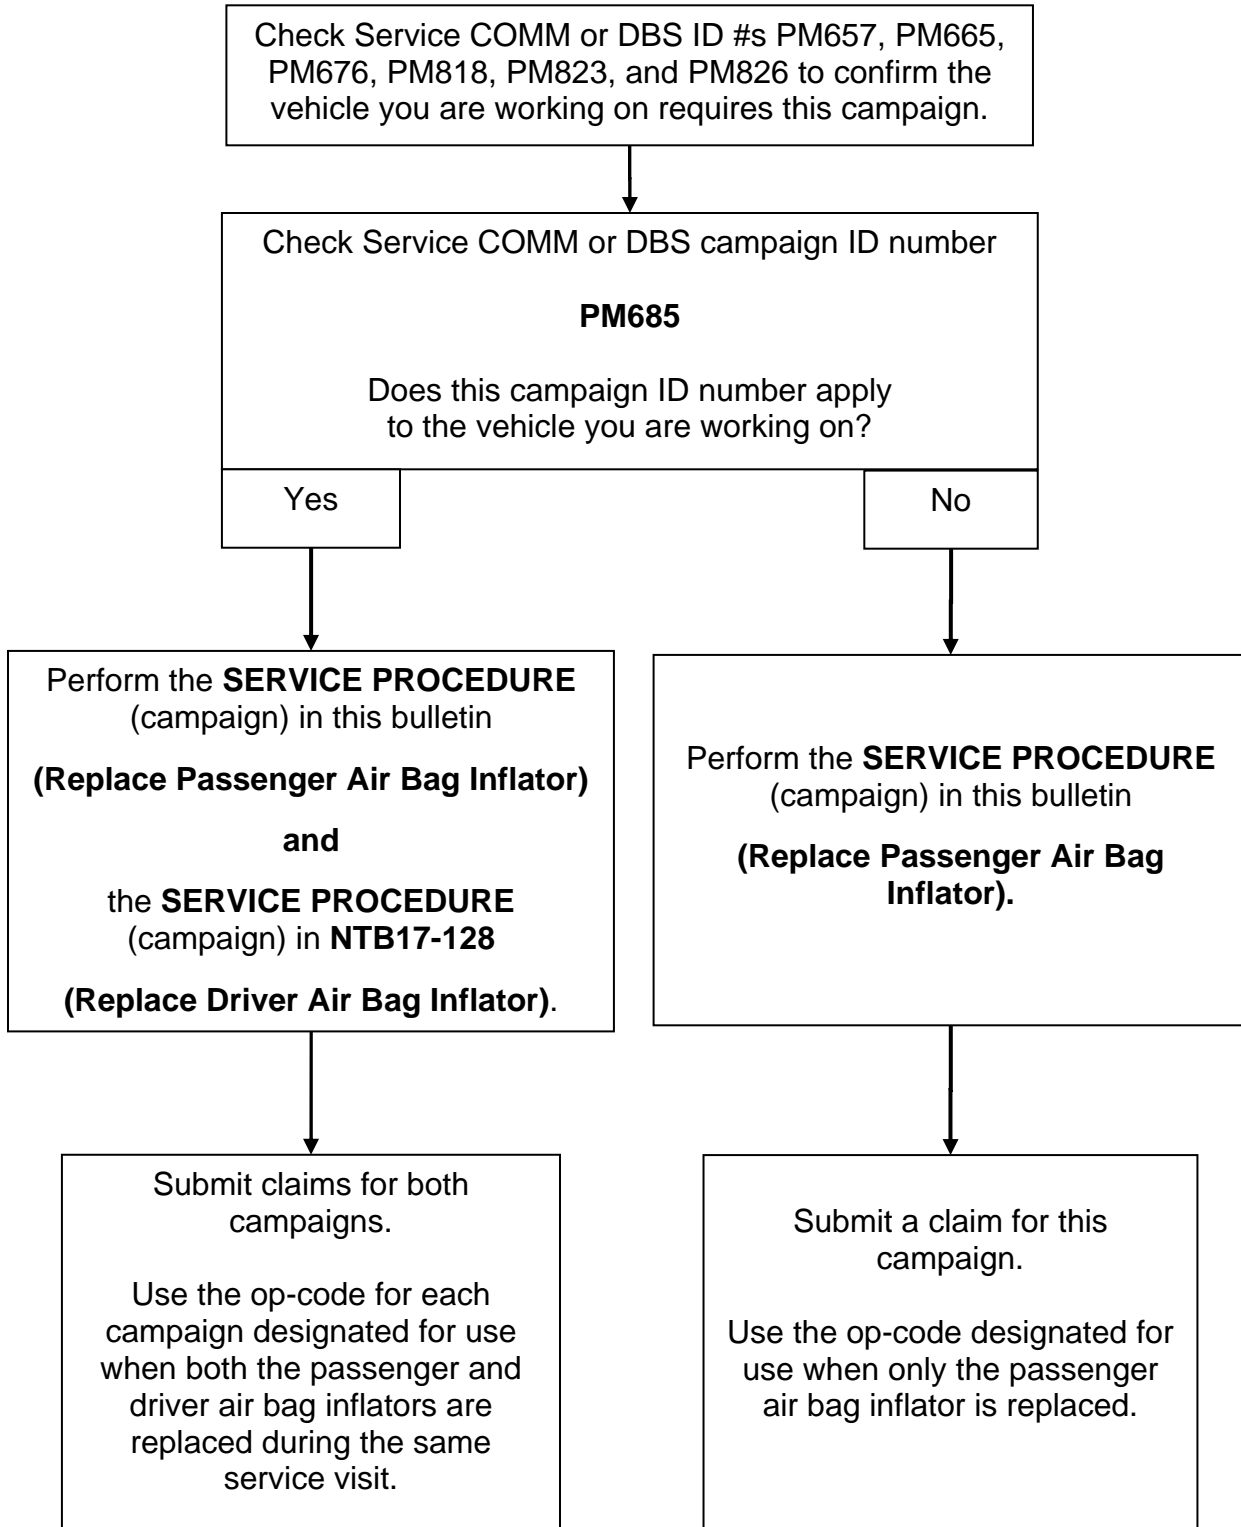

REQUIRED SPECIAL TOOLS

Additional tools can be obtained from Tech•Mate at www.techmatetools.com or 1-833-397-3493.

HINT: When ordering, keep in mind that the tool part number prefix has changed from “J” to “NI”. For example, J-51315 is now NI-51315.

Air Bag Module Support (J-51315)

- New tool part number NI-51315.

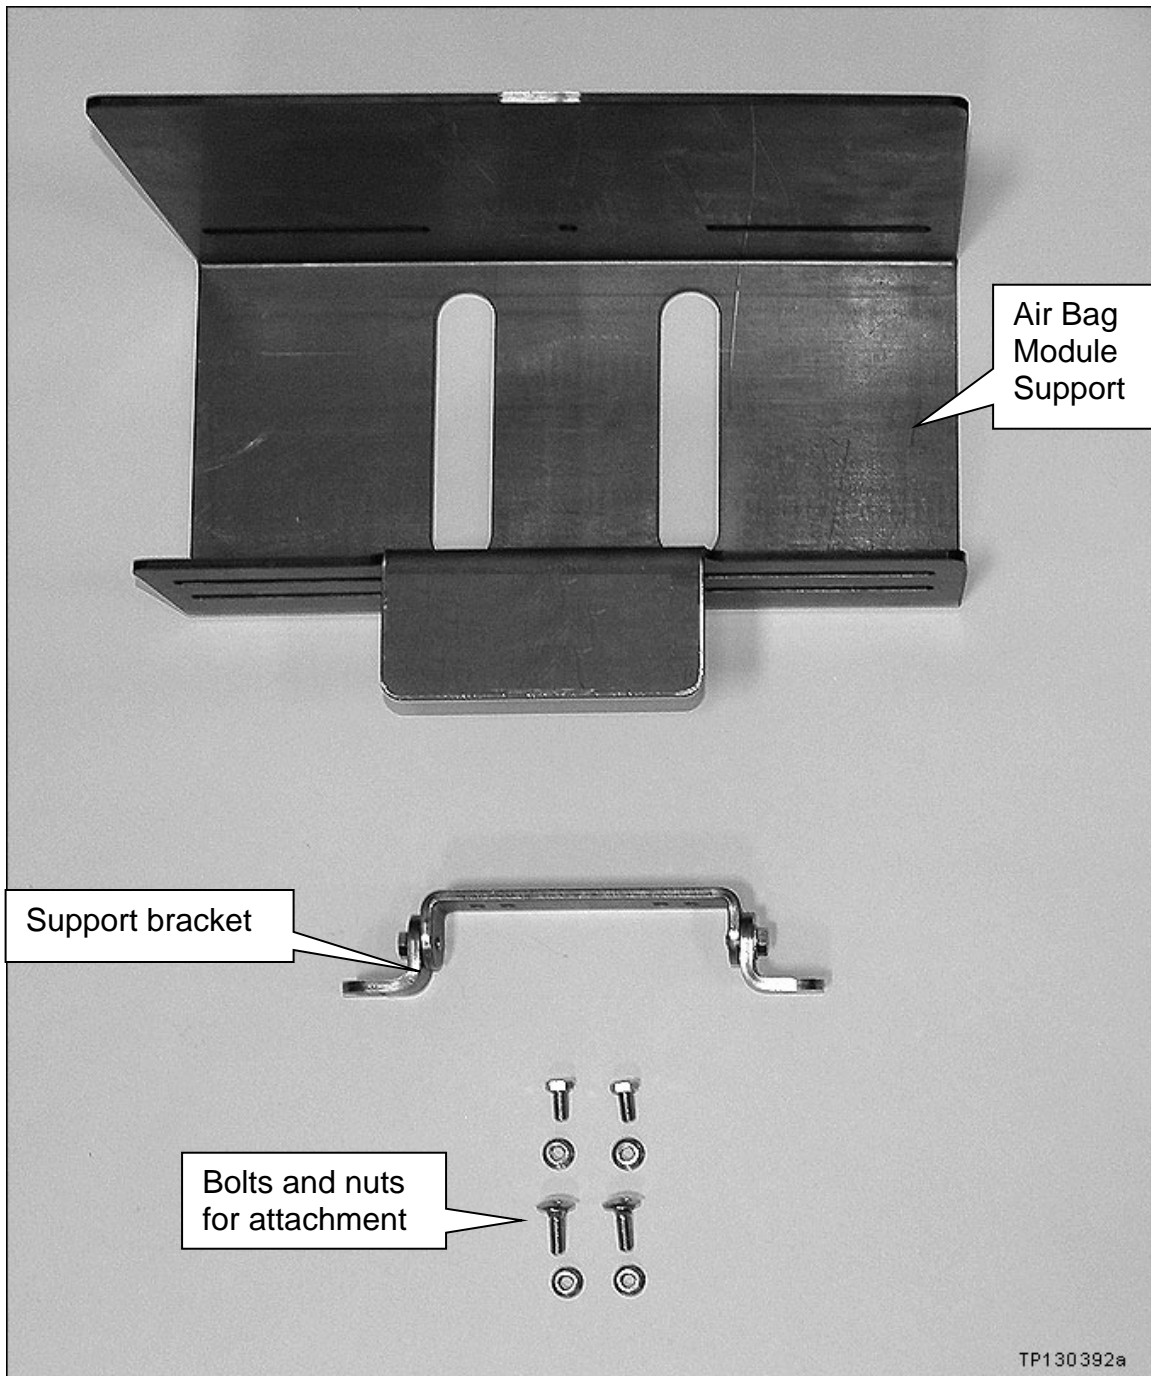


Figure A

REQUIRED SPECIAL TOOLS (continued)

Quick Scan Tool (J-52352)

- Each dealer has been shipped one Quick Scan Tool.
 - New tool part number NI-52352.



Figure B

SERVICE PROCEDURE

IMPORTANT: Follow all cautions, warnings, and notes in the Electronic Service Manual (ESM) when working on or near a Supplemental Restraint System (SRS), such as an air bag.

CAUTION: Handle interior trim carefully to avoid damage. Work with clean hands and clean tools to avoid dirt and stains. Use protective covers as needed.

Register the New Inflator

1. Obtain new inflator from your parts department.
 - New inflator is listed in the **PARTS INFORMATION**.

2. Attach the Quick Scan Tool to your CONSULT PC USB port.

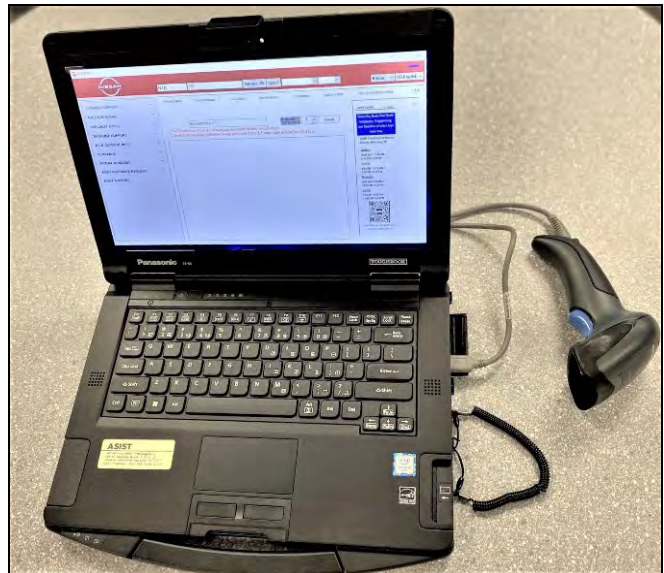


Figure 1

3. On the left side of the ASIST main menu, select **TECH SUPPORT INFO**, and then **Inventory Vehicle Actions**.

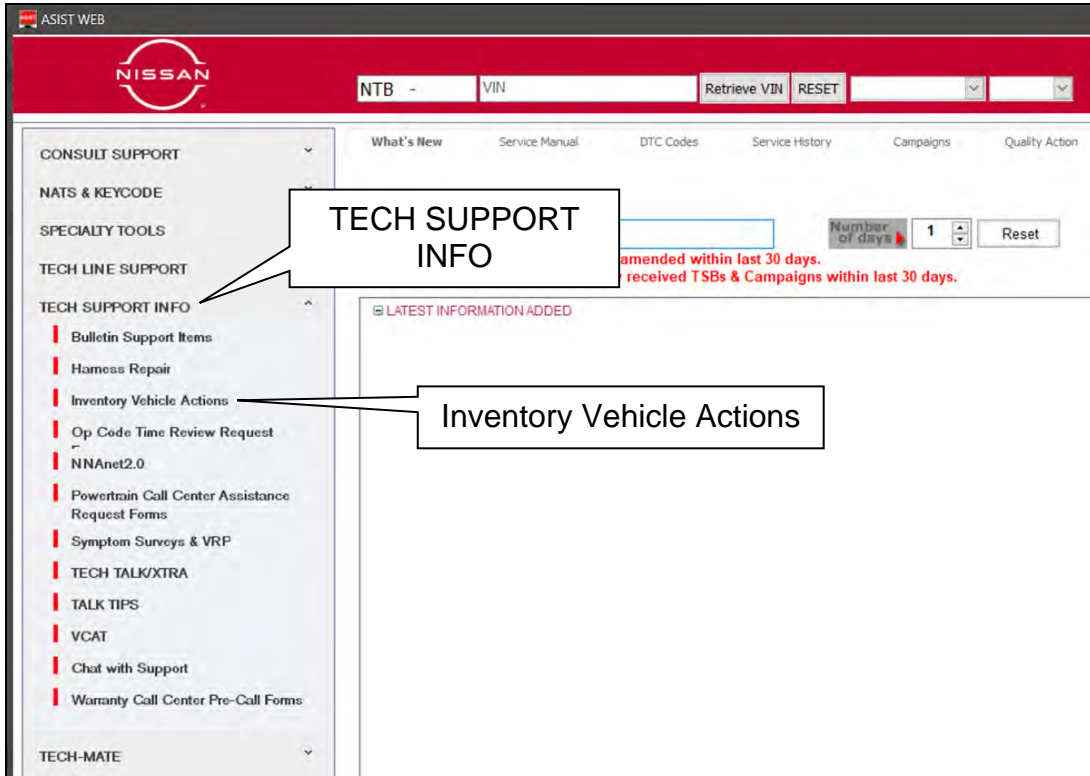


Figure 2

4. Select **CLICK HERE** (Airbag to VIN Registration).

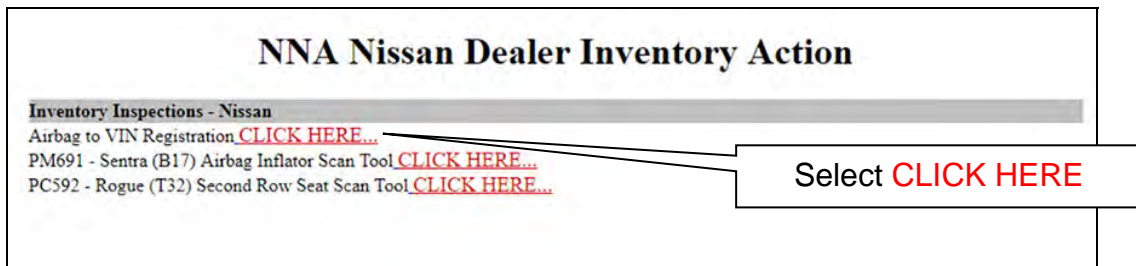


Figure 3

5. Use the Quick Scan Tool to scan the bar code (VIN) on the vehicle B-pillar label.

HINT:

- Some labels may not scan quickly.
- Hold the scan tool approximately 6 inches away from the label.
- Hold the trigger down until the label is read (this may take several seconds).
- The VIN will automatically populate (see Figure 5).
- If needed, the VIN can be entered manually.



Figure 4

Airbag to VIN Registration

11/28/2016 1:36:32 PM

Please enter/scan the VIN and Airbag Inflator Serial Number

Dealer Code

Key Number

VIN

Airbag Serial Number

Step 7; see next page.
(Select **Submit** after both fields are populated).

Figure 5

6. Use the Quick Scan Tool to scan the bar code (serial number) on the side of the box of the new inflator (see Figures 6 and 7).

- The serial number will automatically populate (see Figure 5 on the previous page).

HINT: Do not scan the part number label.

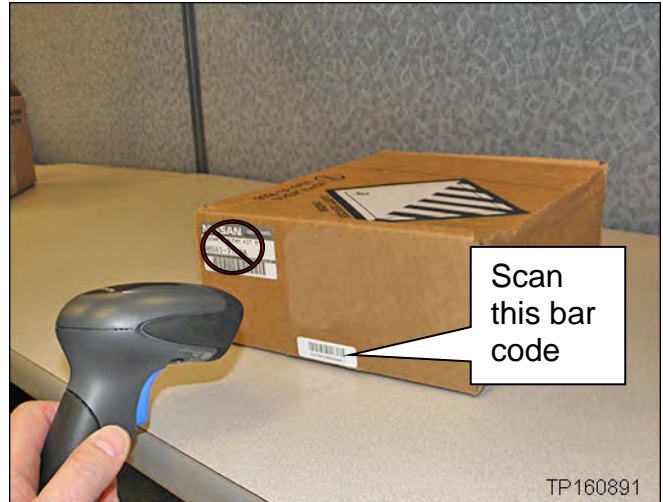


Figure 6

HINT: If needed, the serial number can be entered manually.

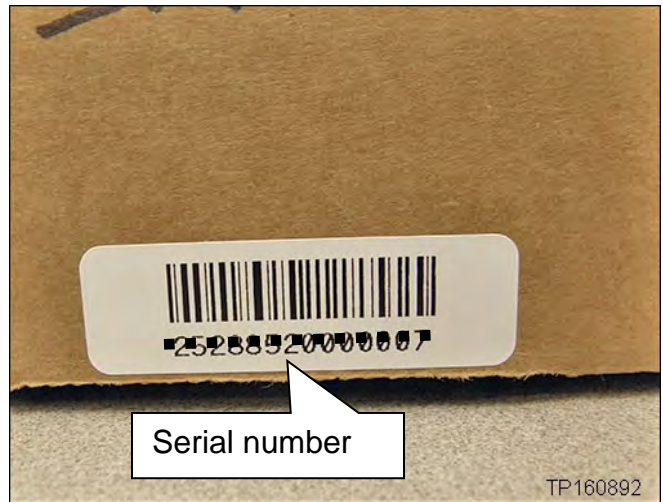


Figure 7

7. Select **Submit** on the ASIST screen (see Figure 5 on the previous page).

8. Write down the radio settings.

Presets	1	2	3	4	5	6
AM						
FM 1						
FM 2						
SAT 1						
SAT 2						
SAT 3						
Bass	Treble		Balance		Fade	Speed Sen. Vol.

9. Turn the ignition OFF.

10. Disconnect both battery cables, negative cable first.

11. Wait at least 3 minutes.

12. Securely mount the Air Bag Module Support (support) in a vise (see Figure 8).

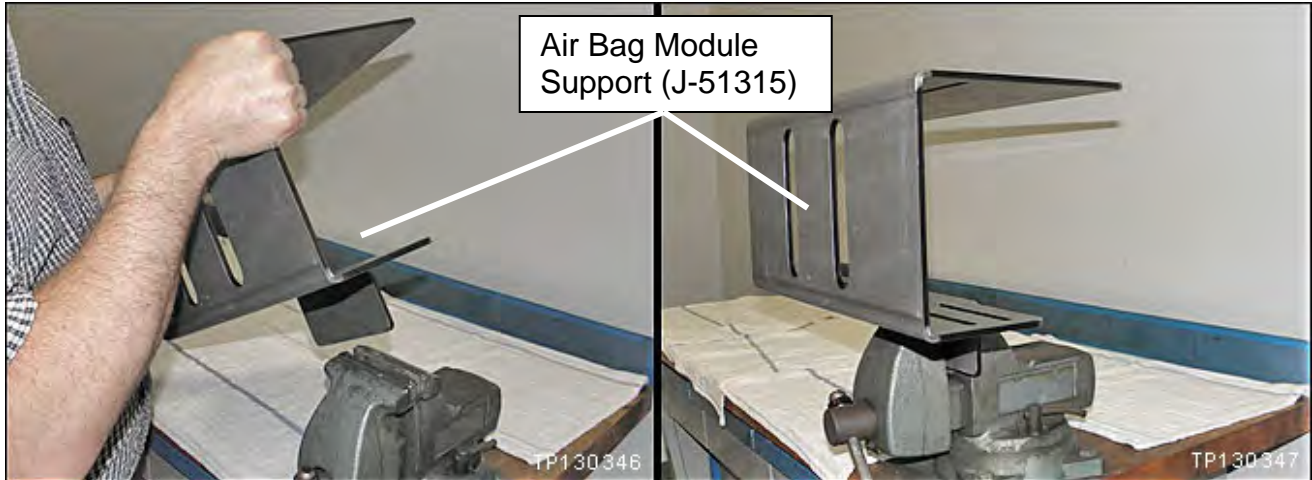


Figure 8

WARNING:

- Work from behind and to the sides of the support.
- Wear safety glasses while performing inflator replacement.

Front Passenger Air Bag Module

13. Remove the front passenger air bag module (module) from the vehicle.

- Refer to the ESM, section **SRS - Supplemental Restraint System**, for module removal.
 - **BE SURE TO PAY SPECIAL ATTENTION** when performing the part of the module removal procedure shown below and on the next page.



From ESM

15. Remove side ventilator assembly.

□: Metal clip

○: Pawl

- a. Insert a suitable tool into the side ventilator assembly from center console side, disengage the clips and pawl of instrument panel pad.

Continued on next page.

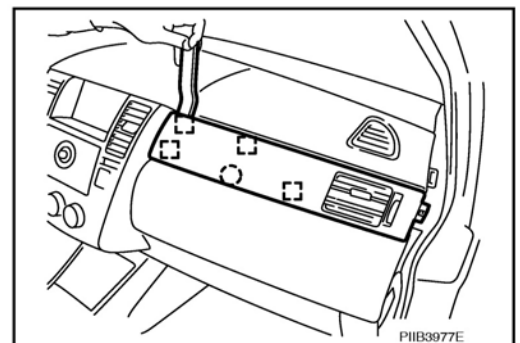


Figure ESM-1

Continued from previous page.

- b. Reach through the glove box compartment by hand to the back-side of the side ventilator and push against A as shown to engage the pawl.

○: Pawl

- c. Insert a suitable tool into the bottom gap of side ventilator assembly after removing the instrument side mask and push against B as shown to disengage the pawl.

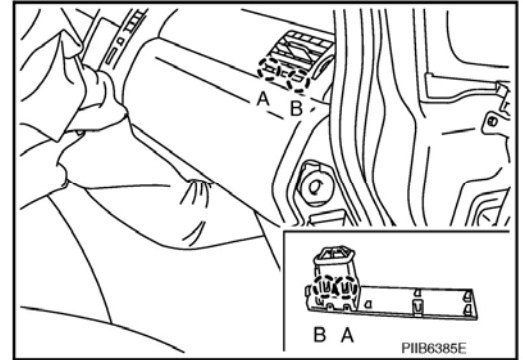


Figure ESM-2

- d. Lift the side ventilator assembly up from the bottom, pull backward while disengaging the side ventilator assembly upper pawls, and then remove the side ventilator assembly.

○: Pawl

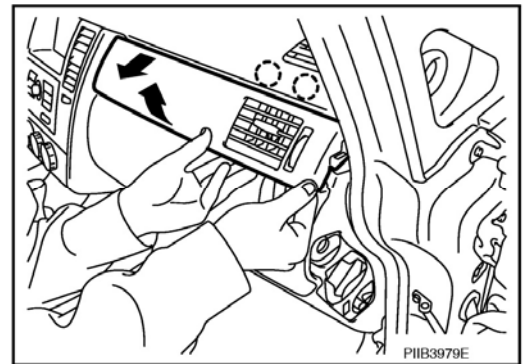


Figure ESM-3

14. Set the module in a clean working area.

- 15. Detach the air bag harness from the instrument panel finisher and module frame.

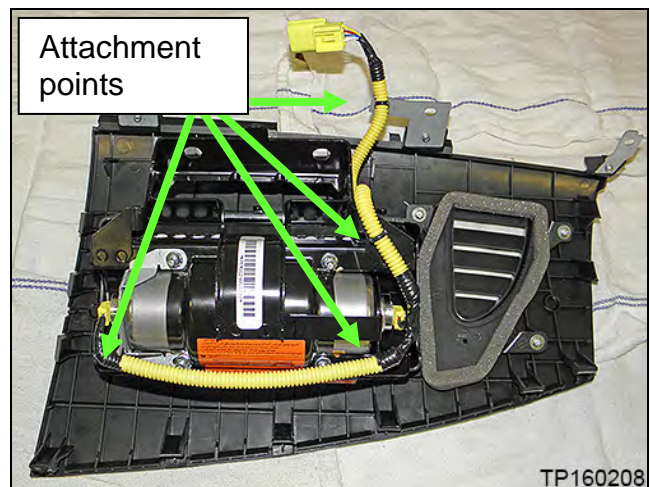


Figure 9

16. Remove the instrument panel finisher from the module assembly.

- a. Detach the module hooks (Figure 10) one at a time, starting at one end and then working towards the opposite end (seven hooks).
 - o Detach the hooks from the side of the instrument panel finisher that is facing up when it is installed in the vehicle.

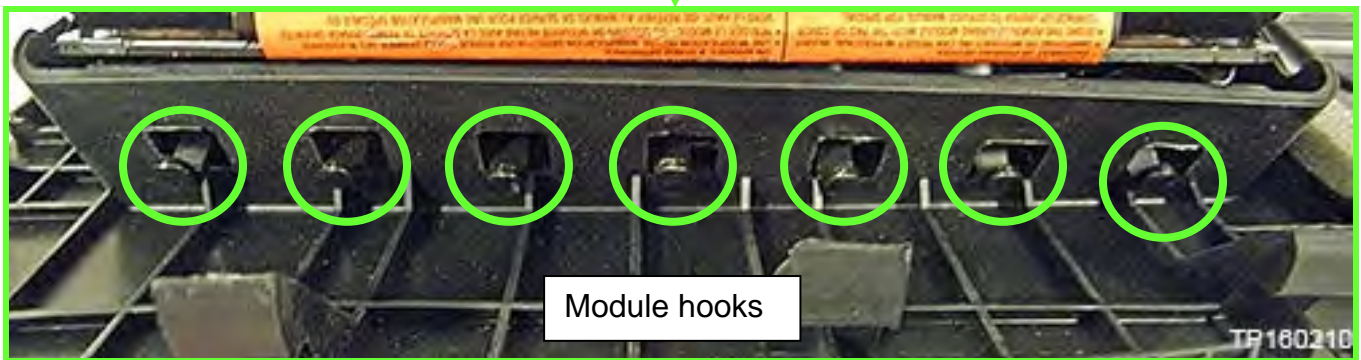
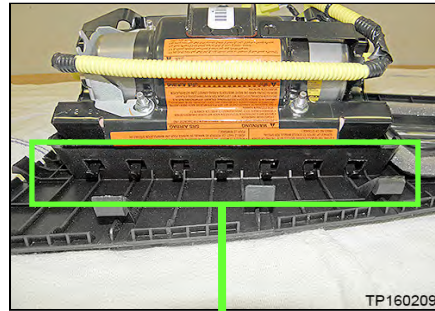


Figure 10

- b. Swing the module away from the instrument panel finisher and then detach the hooks on the opposite side to remove.

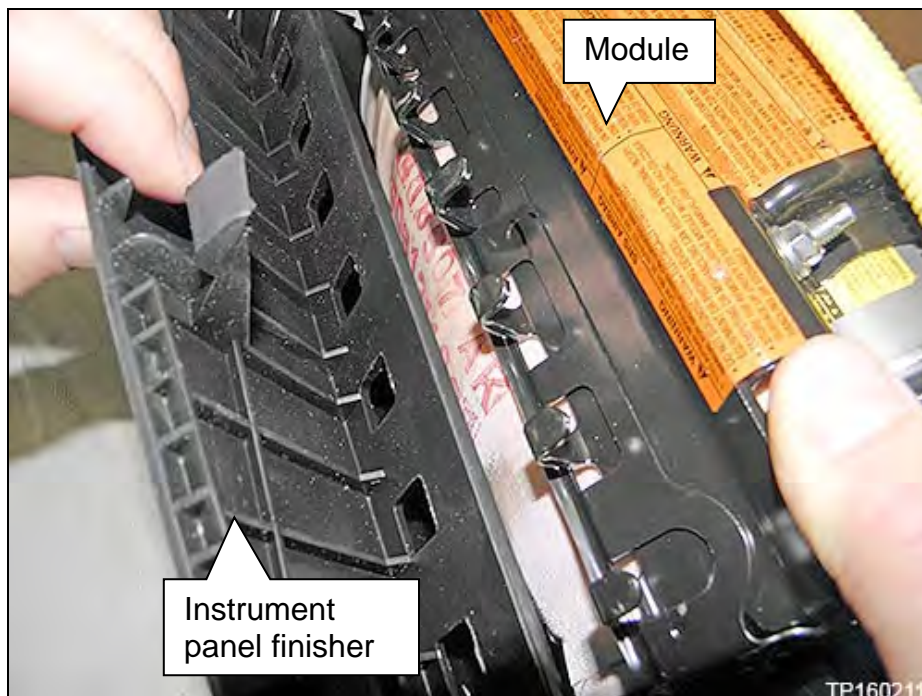


Figure 11

17. Attach the support bracket to the module frame.

- Tighten the bolts holding the bracket to the module frame.

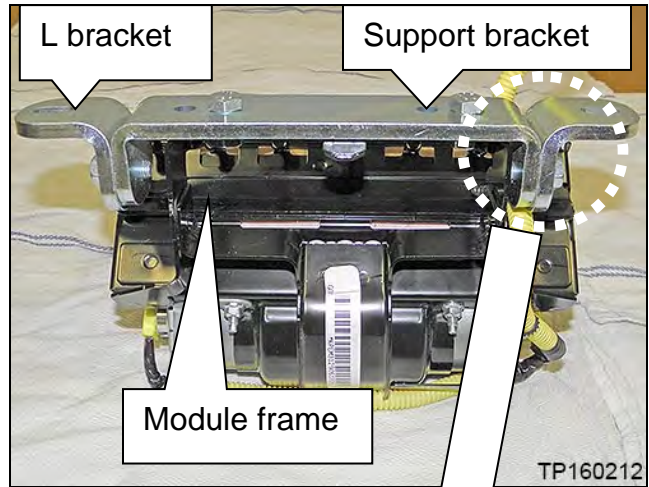


Figure 12

18. Put a washer between the bolt and L bracket (on the right side as viewed in Figure 13).

- Leave the L brackets on each end slightly loose to allow for positioning of the module in the support.

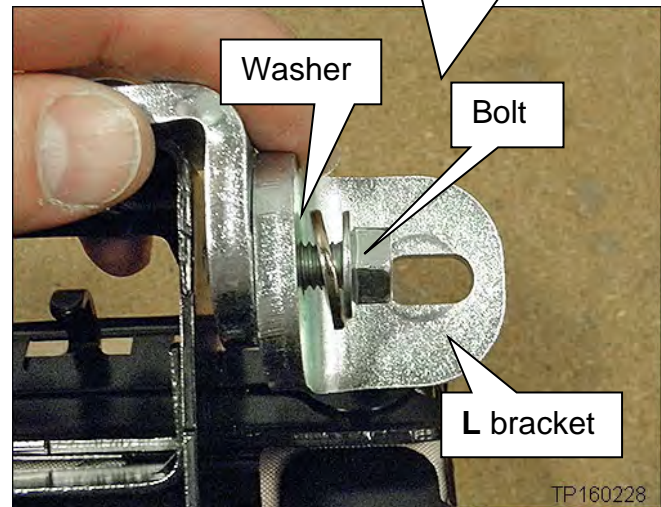


Figure 13

19. Mount the module in the support.

- Use bolts and nuts supplied with the support.



Figure 14

- Install washers between the L bracket and the support as shown.
 - Use standard washers from a generic nut and bolt selection.
 - Use about 4 washers to create a space about 5/16 inch (8 mm).

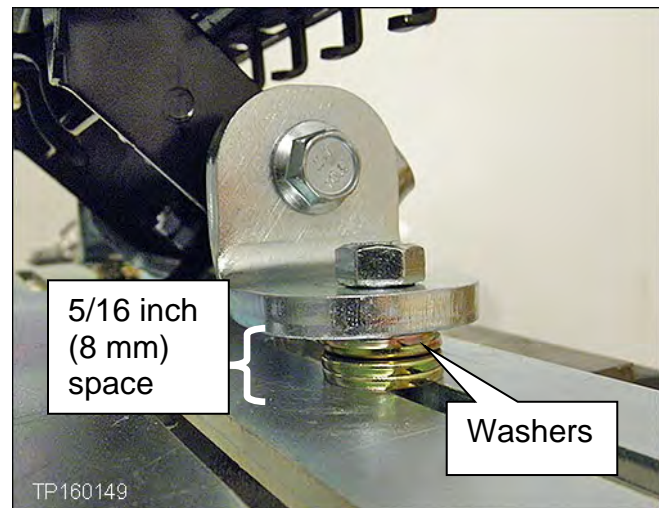


Figure 15

20. Make sure the module is centered in the support.

HINT: Centering the module in the support will allow access to the inflator securing nuts through the slots in the support (see Figure 16).

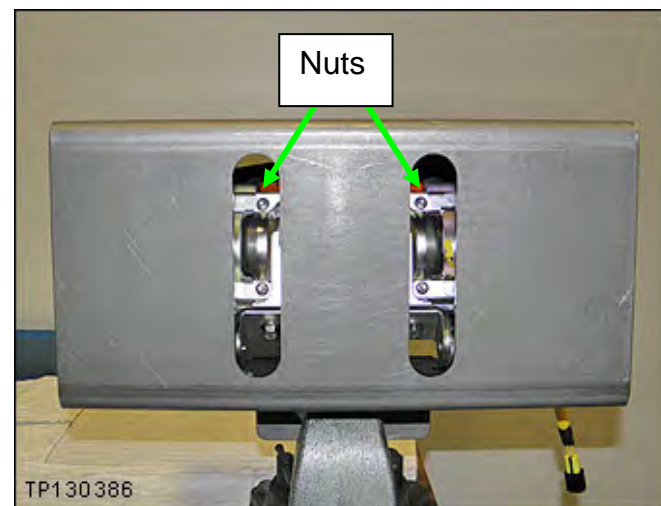


Figure 16

21. Tighten all of the mounting bolts and nuts that hold the module to the support.

22. Carefully cut a few inches of the yellow corrugated harness cover in the area shown.

- **Do not** cut the wires inside the corrugated cover.

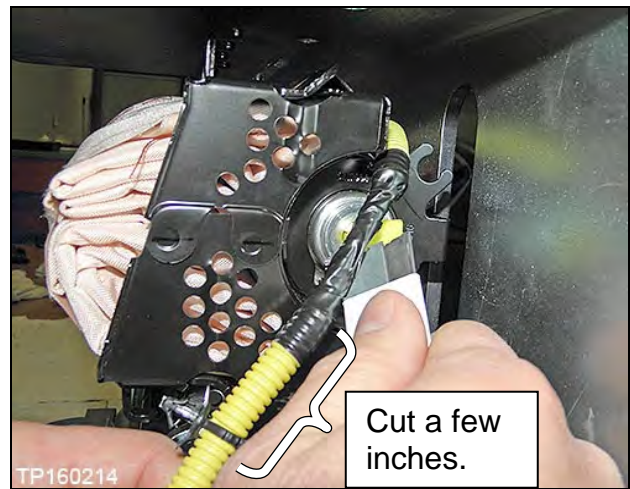


Figure 17

23. Attach two (2) shorting pins to the inflator harness as shown.

- Make sure to pair the wires from each end of the inflator.

Blue with White

Red with Yellow

- Use an insulation displacement type wire connector as a shorting pin.
- Refer to **PARTS INFORMATION** for additional connector/shorting pin information.

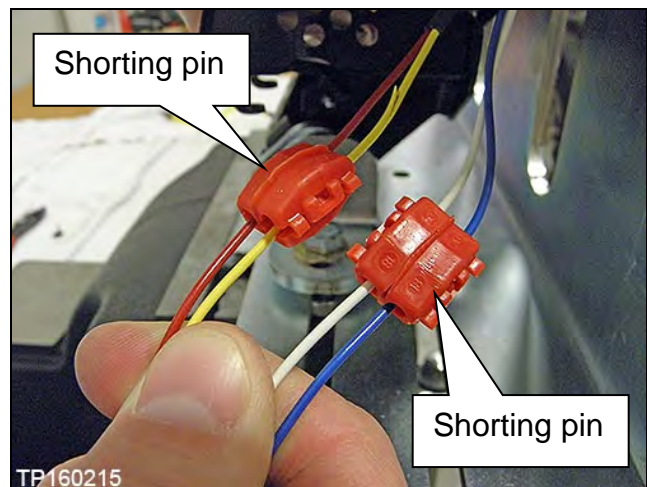


Figure 18

24. Cut off the connector end of the harness.

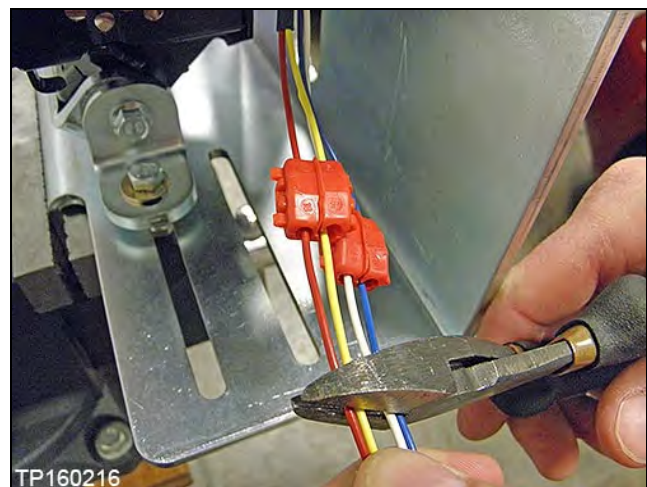


Figure 19

25. Remove the four (4) nuts from the module that hold the inflator in place (see Figures 20 and 21).

- Use a ratchet and extension.



Figure 20

- Remove the four (4) nuts.

HINT: These nuts will not be reused.

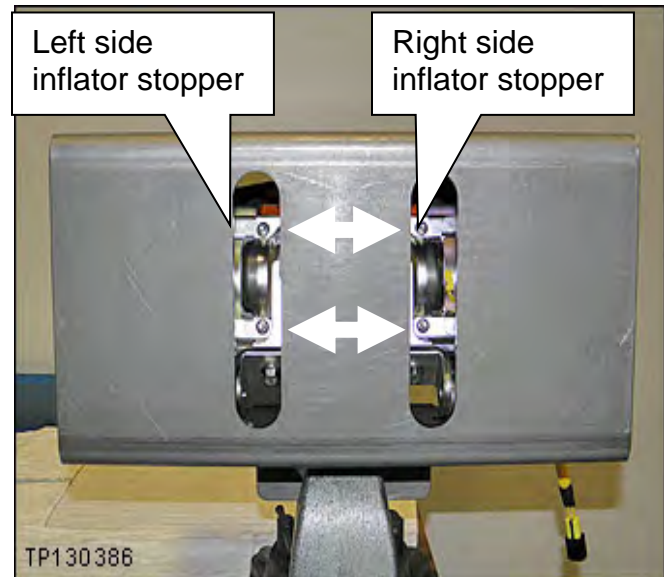


Figure 21

26. Remove the right side inflator stopper and discard.

- New inflator stoppers will be used during reassembly.

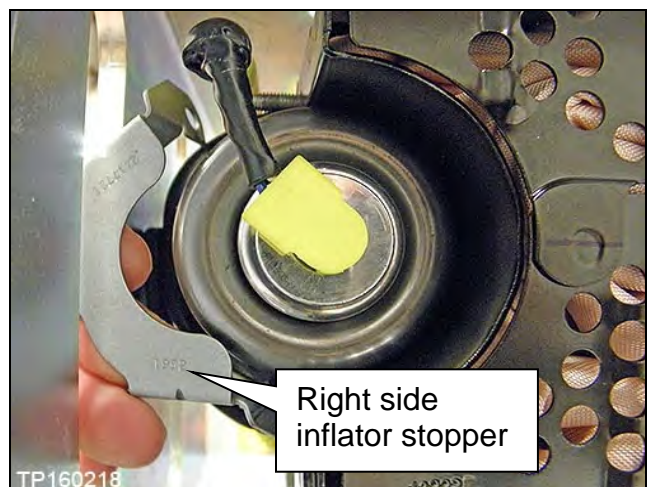


Figure 22

27. Push the left side of the inflator out of the module.

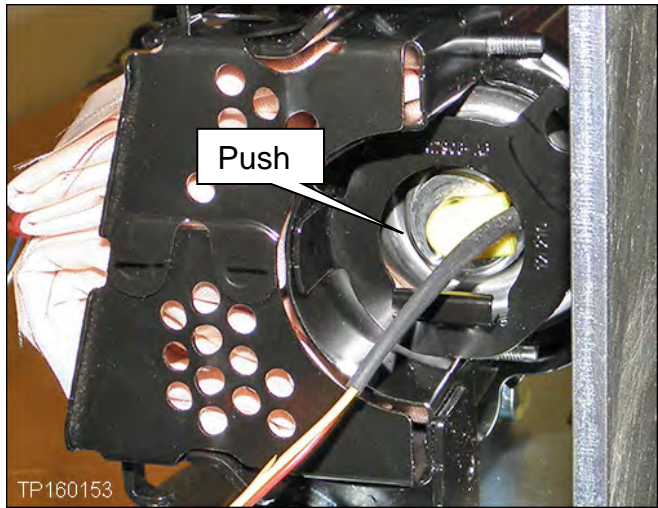


Figure 23

28. Pull the inflator completely out of the module from the right side.

29. Set the old inflator in the clean working area making sure it does not roll and fall to the floor.

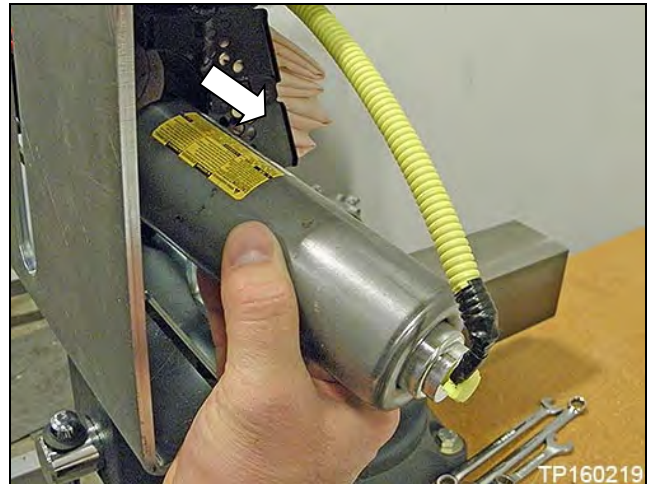


Figure 24

30. Install the new left side inflator stopper with two (2) new nuts finger tight.

- Make sure to **use new nuts**.
- New nuts are included with the new inflator.

31. Remove the new inflator from the box.

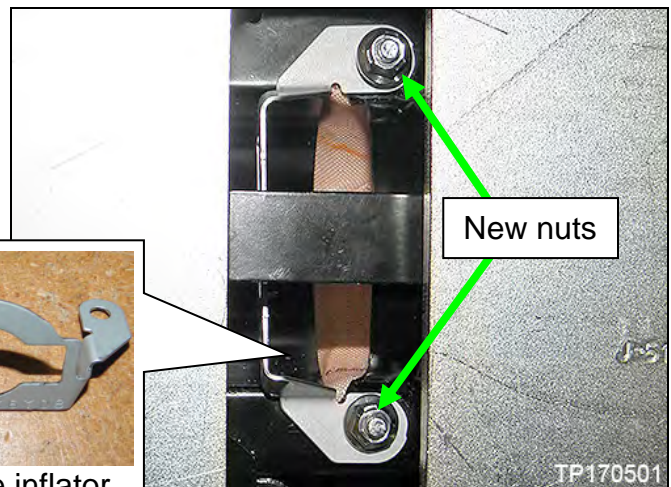


Figure 25

32. Slide the new inflator into the module assembly from the right side.

- Slide purple end in first.

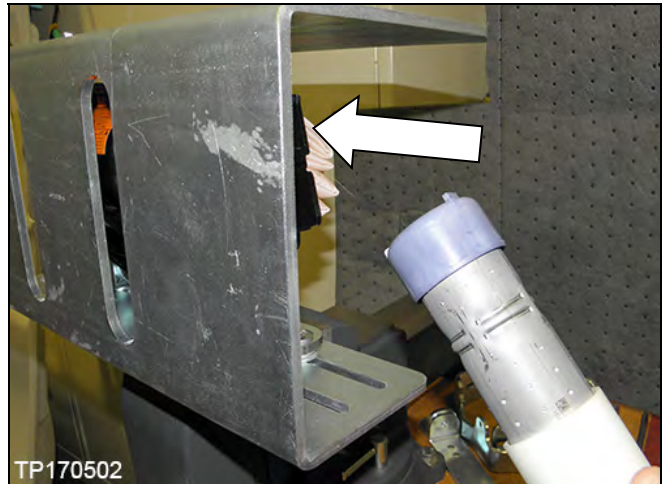


Figure 26

33. Make sure the inflator is positioned / oriented correctly as shown.

- **The flat side of the inflator end (on the left side) must face the flat side of the inflator stopper.**

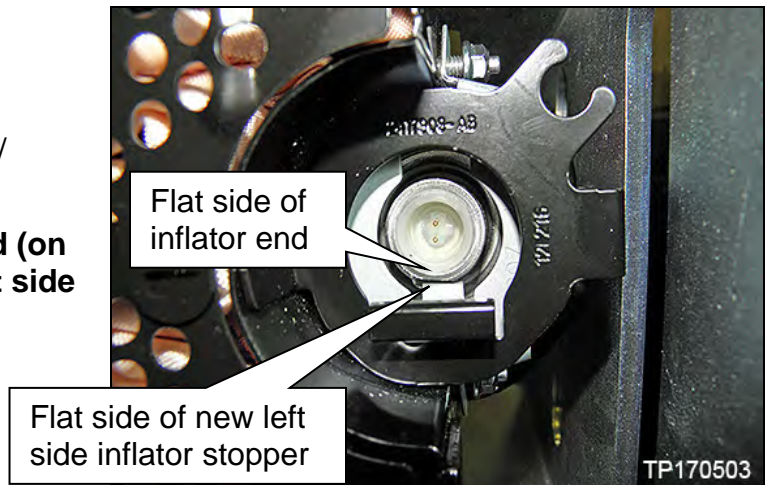


Figure 27

34. Install the new right side inflator stopper with two (2) new nuts finger tight.

- Make sure to **use new nuts**.
- New nuts are included with the new inflator.


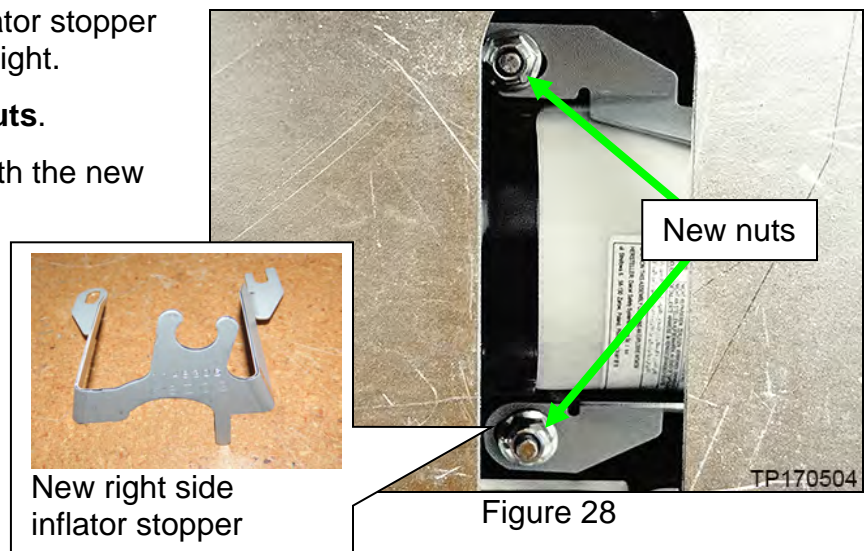


Figure 28

35. Make sure the inflator is pushed all the way into its housing and up to the left side inflator stopper— no gap on the left side (see Figure 29).

36. Make sure there is no gap between the right side inflator stopper and the inflator (see Figure 29).

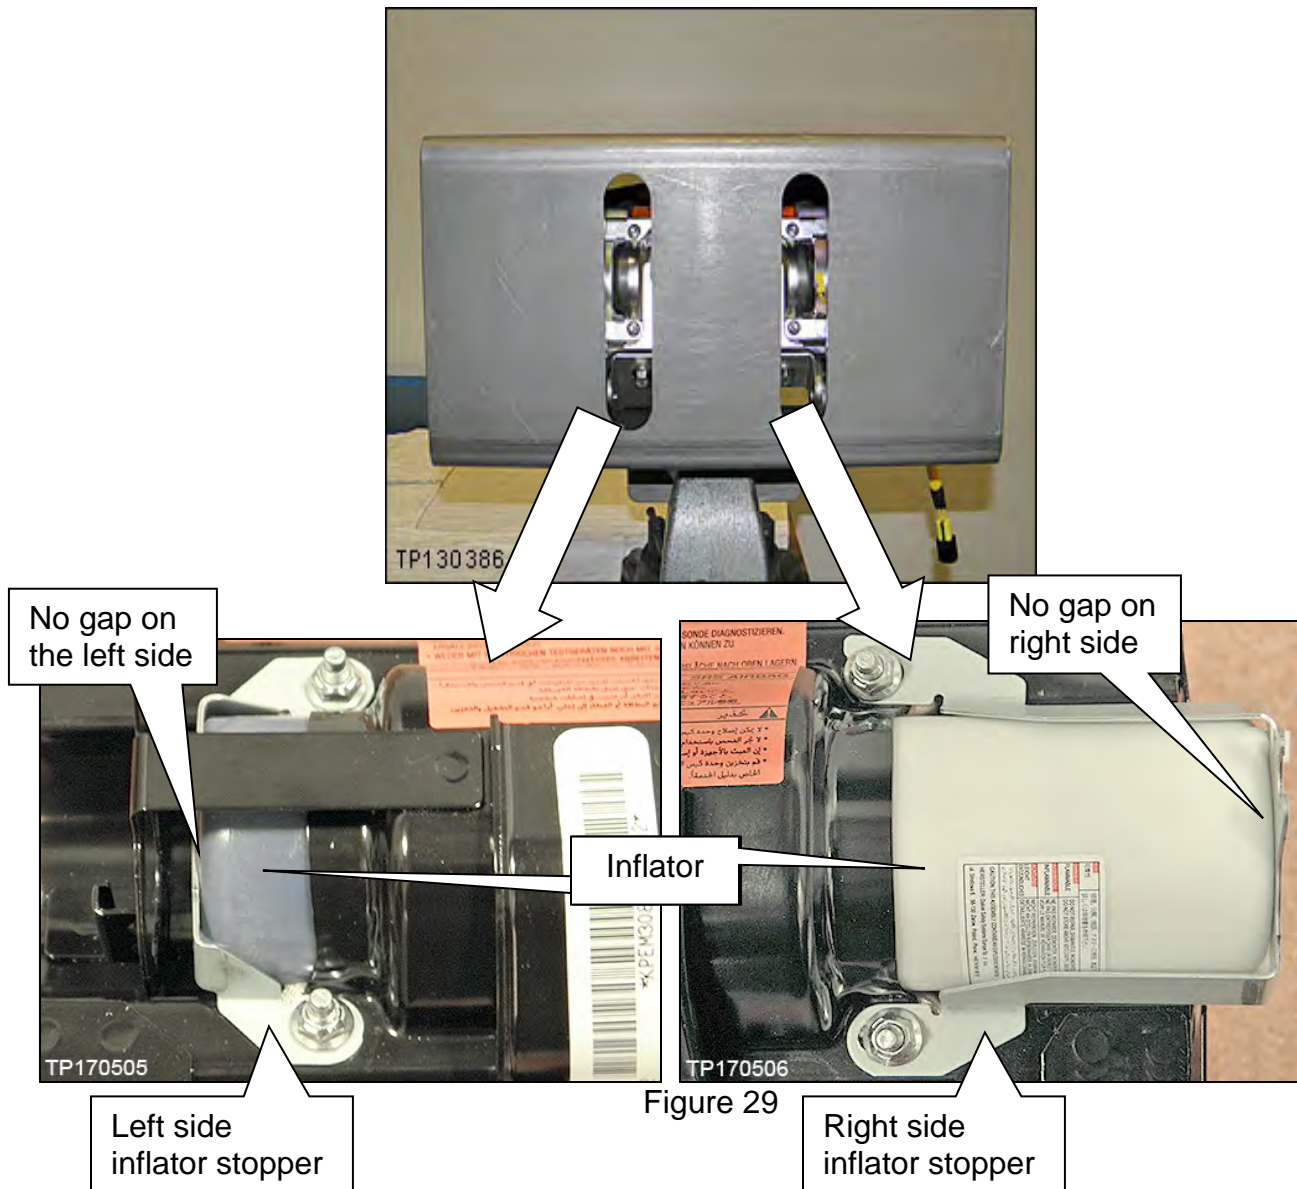

37. Torque the four (4) inflator securing nuts.

- Torque nuts to:
3.9 N•m (0.39 kg-m, **34 in-lb.**)
- Torque nuts in the order shown.

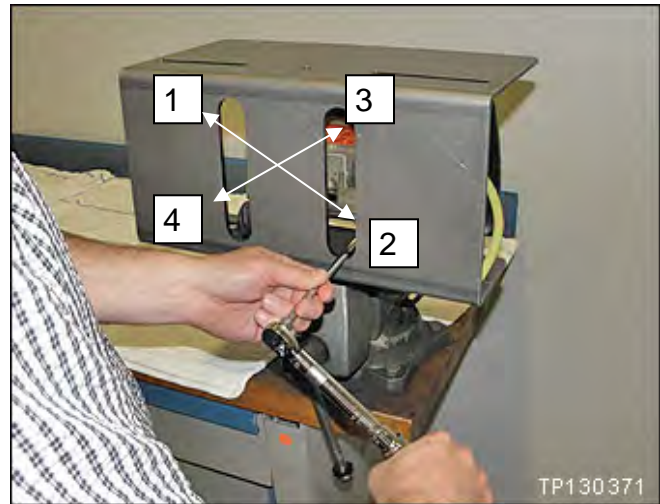


Figure 30

IMPORTANT:

- In the next step you will be attaching the new harness to the new inflator.
- Once an inflator connector is attached to the inflator, it cannot be disconnected.

38. Attach the new harness to the inflator.

- Make sure to attach the harness correctly - refer to Figures 31, 32 and 33.
- The short lead of the harness will be attached to the purple end of the inflator.
- The long lead of the harness will be attached to the white end of the inflator.

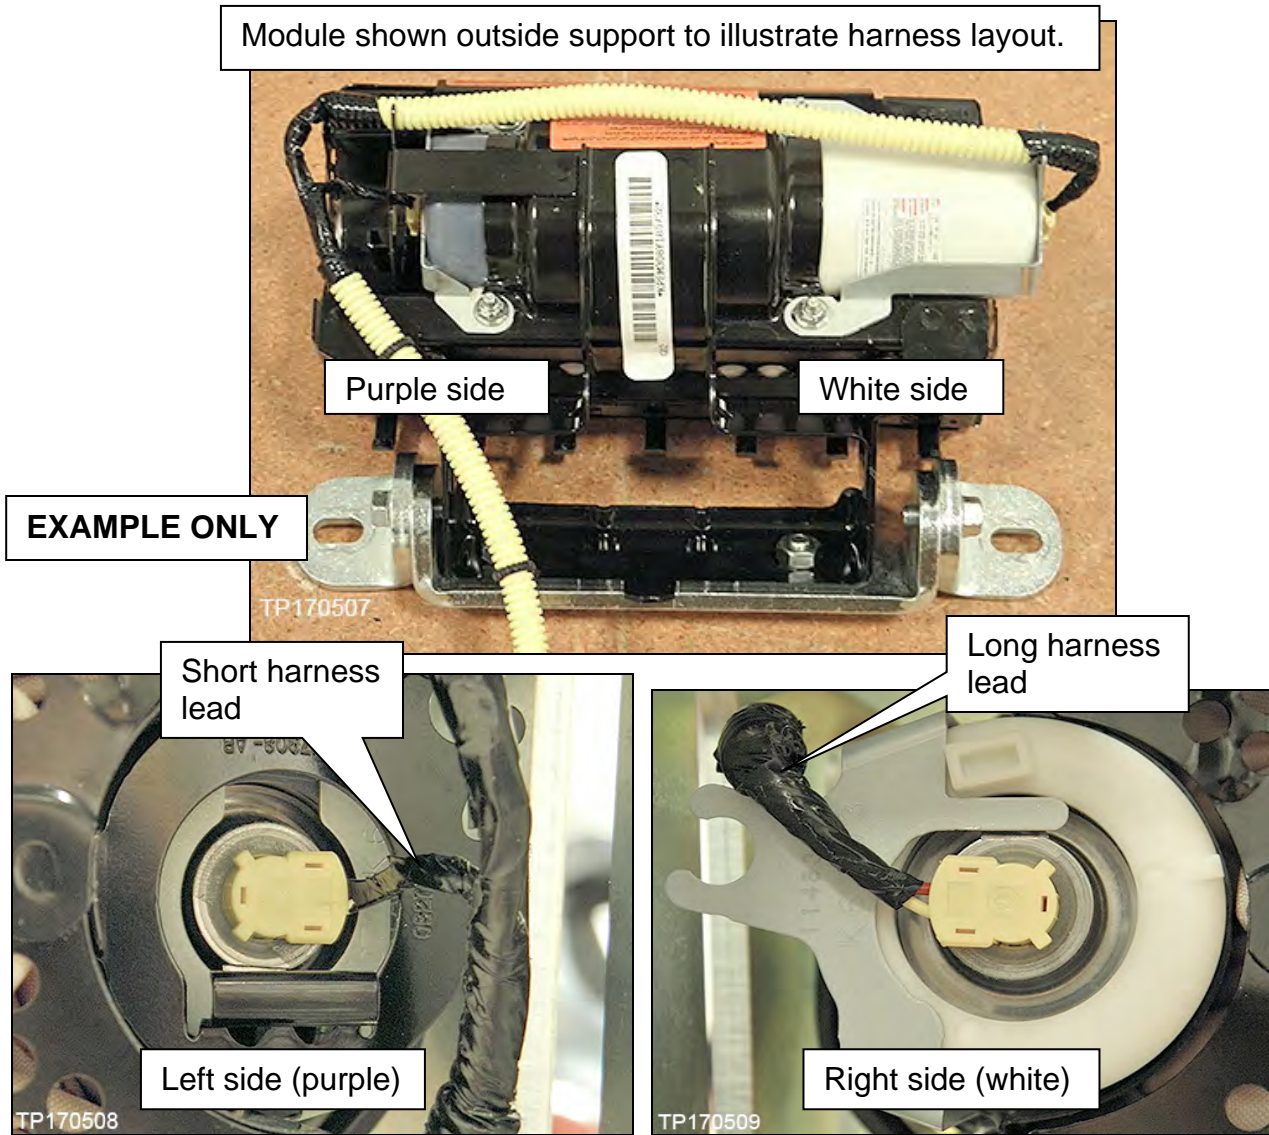


Figure 31

- Make sure the T shape at the inflator end aligns with the T shape of the connector.

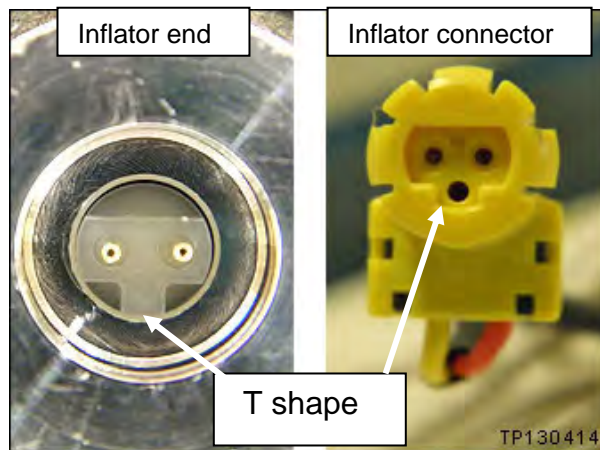


Figure 32

- Make sure the inflator connectors are fully engaged / seated (see Figure 33).

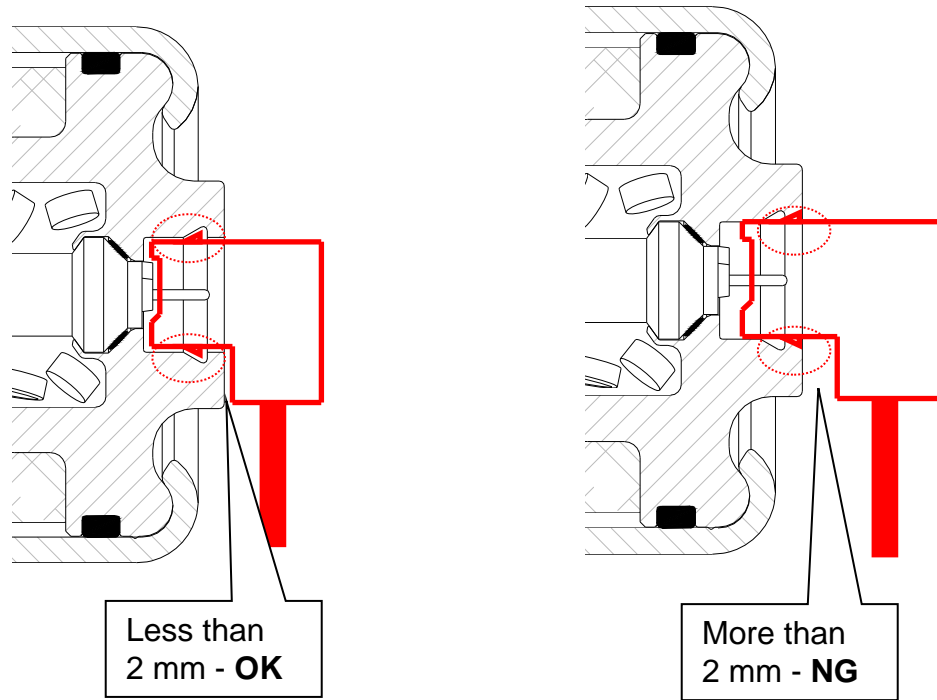


Figure 33

39. Remove the module from the support and set it on the clean working area.

40. Remove the module support bracket from the module frame.

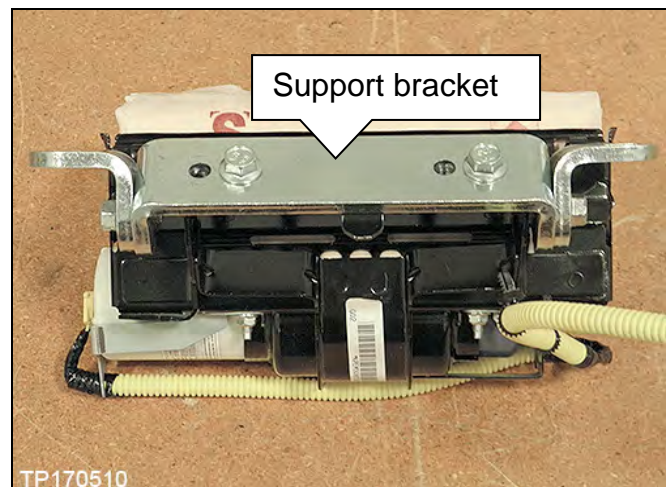


Figure 34

41. Reinstall the instrument panel finisher to the module assembly.

42. Route and attach the harness to the harness guides, and attach harness clips as shown.

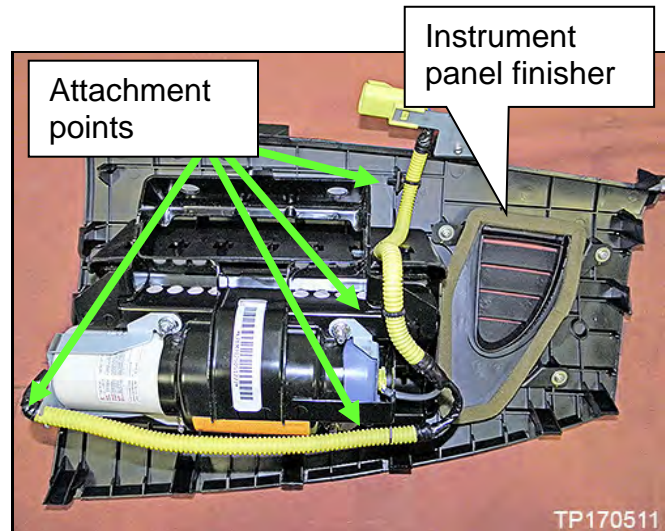


Figure 35

43. Reinstall the module into the vehicle in reverse order of removal.

- Make sure to use new module mounting bolts included with the new inflator.

HINT: If the driver air bag module will be replaced during the same service visit, replace both modules before reconnecting the battery cables.

44. Re-connect both battery cables – positive cable first.

45. Turn the ignition from OFF to ON and observe the air bag warning light:

- The air bag warning light should illuminate for 7 seconds, and then go out.

HINT: If the air bag warning light does not operate as described above, there may be an issue not covered by this campaign. Refer to ASIST and the appropriate ESM for additional diagnostic and repair information.

46. Reset the clock and the radio settings.

47. **Return the removed (old / non-deployed) inflator in the box that the new inflator came in.**

- TK Services and RXO Logistics have provided return instructions for the recalled Takata inflators and modules at pages 24-27 of this bulletin.
 - **Reminder:** Federal Hazardous Material Regulations (HMR) govern preparation of shipments of hazardous materials and prohibit handling and preparation for shipment by any person who is not trained and certified as required by the HMR. The HMR impose specific requirements for retailers, packaging, labeling and pre-transportation functions. Violations can result in civil penalties by the Pipeline and Hazardous Materials Safety Administration. (Title 49 Code of Federal Regulations Subchapter C)

Hazardous Materials Training/Certification Responsibility

In accordance with Title 49, Code of Federal Regulations (49 CFR), Sections 172 Subpart H and 173.1(b), it is the responsibility of the dealer to ensure that every employee handling and preparing hazardous materials for shipment is properly trained/certified. Initial and recurring training can be completed by contacting one of the training companies listed below, or any other company that offers hazardous material training/certification.

SHIPMATE, INC.

Hazardous Materials Training & Consulting 780 Buckaroo Trail, Suite D Sisters, OR 97759
Website: www.shipmate.com, Tel: 310.370.3600, Fax: 310.370.5700

DGI Training Center

West Seminar Registrations and On-Site Information 1060 El Camino Real, Suite B Redwood City, CA 94063-1645 Website: www.dgitraining.com, Tel: 650.306.8450 or 800.338.2291

Lion Technology

570 Lafayette Rd. Sparta, NJ 07871-3447 Email: info@lion.com, Tel: 888.546.6511, Fax: 973.579.6818

TAKATA AIRBAG RECALL RETURN INSTRUCTIONS




IMPORTANT: Must be performed by certified DOT HAZMAT personnel.

<p>Takata Airbag Recall</p>	<h2 style="margin: 0;">Inflator and Module Returns Shipping Instructions</h2> <p style="margin: 0;">Please contact scfieldaction.14305@rxo.com for documentation and to arrange pickup</p> <p style="margin: 0;">If retailers do not receive a response from an RXO logistics specialists within 48 to 72 hours, then they can utilize the escalation number, (210) 317-6436 for further assistance.</p>	<p>06/20/2023</p>
-------------------------------------	---	-------------------

1. Shipping Documents

- Pallet Label**
 - To be emailed by RXO
 - To be affixed to each Pallet
- Over-pack Label**
 - To be emailed by RXO
 - To be affixed to the outside of each pallet
- Bill of Lading**
 - To be emailed by RXO.
 - Print 2 copies: 1 for Dealer Records, 1 for Driver.
- ERG Document**
 - To be emailed by RXO.
 - To be provide by the Dealer to the Driver for each shipment



TK SERVICES
1199 AUSTIN COURT
HOWELL, MI 48843

5. Shipping Instructions – Prepare the Pallet

- Accumulate and palletize Kits
- Arrange Kits on Pallet as pictured here
 - 20 boxes per row/layer (5x4)
 - 10 rows/layers per pallet (200 boxes)
- Shrink-wrap Kits to Pallet
- Affix Over-pack Label and Pallet Label on (1) side of Pallet (Not on Top)
- If 200 boxes are not accumulated every 2 weeks, please proceed to step 6.

Note: If you receive non-uniform sized kits (Older version), Please contact RXO via the instructions in Box 6 for additional Instructions






TK SERVICES
1199 AUSTIN COURT
HOWELL, MI 48843

2. Packing Instructions

****DO NOT DEPLOY THE INFLATOR****

- Confirm box is in acceptable condition. Box should be in good condition with no visible signs of damage and should be capable of withstanding additional transportation.
- If a new box is needed, follow the New Box instructions located in section #8 of this page.
- Place the un-deployed air bag inflator or module in the "cradle" of the box insert.





6. Shipping Instructions – Schedule Pickup

- Upon Accumulating 200 kits (1 Over-pack/Pallet) Minimum
 - Contact RXO at the e-mail noted above If 200 Kits have not been accumulated every 2 weeks, please contact RXO for direction.
 - Complete shipping template and attach to E-Mail.
- Have the following information Available
 - Dealer #
 - Quantity of Over-packs/Pallets
 - Quantity of Driver Kits and Quantity of Passenger Kits on each Pallet
 - Email Address where shipping Documentation can be received
 - Lift gate Service Needed?

3. Closure Instructions

- Close the top box flap, per box closure instructions located on front panel of box using a 2" wide by 4" long piece of tape to securely Close the box.





7. Shipping Instructions – Ship

- Give 1 Copy of BOL and 1 Copy of ERG to Driver
- Retain 1 Copy of BOL for Dealership records and archive for at least 2 Years

4. Shipping Instructions - Label each Box

- 1 OEM module/inflator kit contains this 2-part label
- 2 Peel off 'Ship-To' label
- 3 Affix label to box. Do not cover up Class 9 Marking




8. Requesting a New Box / Shipping Labels

If a new box or replacement box shipping labels are needed, please contact a representative by email to request replacement materials.

Primary Contact:
E-Mail: scfieldaction.14305@rxo.com

To help expedite your request, please be prepared to provide the following information:

- Serial number on the original box (if replacement box is needed)
- What Type of shipping material needed
 - Replacement Box
 - Two Part Return Label
 - Bill of Lading
 - ERG Form
- Dealer Shipping Information
 - Contact Name
 - Dealer Address
 - Phone Number



NOTE: International and ALL Locations outside of the Continental United States (APAC, EMEA, Mexico, Hawaii, Alaska, Puerto Rico, and US Virgin Islands dealers) **CANNOT** follow above shipping instructions. Instead, dealerships in these locations **MUST** contact TK services /RXO USA representative directly for shipping instructions: RXO Representative .Email: scfieldaction.14305@rxo.com Continental US 48 State Dealerships, please follow steps 1-8 above.

BOOKING TEMPLATE FOR TAKATA AIRBAG RECALL RETURNS

PALLET (S) MUST BE READY BEFORE SENDING IN THE TEMPLATE. ALL FIELDS PERTAINING TO YOUR LOAD MUST BE FILLED IN AND SENT TO SCFIELDACTION.14305@RXO.COM. ESCALATION PHONE NUMBER : 210-317-6436
TEMPLATE MUST BE USED FOR ALL BOOKING REQUESTS.

Dealer Code					
Dealer Name					
Pickup Address					
City, State & Zip					
YOUR Name & Phone#(DO NOT GIVE YOUR CELL #)					
Hours available for pickup					
Email Address for BOL					
Do you need a truck with lift gate and pallet jack (YES or NO)					
SPECIAL EQPT NEEDS OR SPECIFIC CARRIER REQUEST					
	Pallet #1	Pallet #2	Pallet #3	Pallet #4	Pallet #5
Driver Side Count					
Passenger Side Count					
TOTAL	0	0	0	0	0

	Pallet #6	Pallet #7	Pallet #8	Pallet #9	Pallet #10
Driver Side Count					
Passenger Side Count					
TOTAL	0	0	0	0	0

	Pallet #11	Pallet #12	Pallet #13	total boxes
Driver Side Count				0
Passenger Side Count				0
TOTAL	0	0	0	0

TRUCK LOAD IS 14 + PALLETS	USE THIS SECTION FOR 14 PALLETS OR MORE
TOTAL PALLET COUNT	
TOTAL DRIVER COUNT	
TOTAL PASSENGER COUNT	
TOTAL WEIGHT	

PALLET (S) MUST BE READY BEFORE SENDING IN THE TEMPLATE. ALL FIELDS PERTAINING TO YOUR LOAD MUST BE FILLED IN AND SENT TO SCFIELDACTION.14305@RXO.COM ESCALATION PHONE NUMBER 210-317-6436 MIGUEL PRIGAADA

Dealer Code Dealer or Business Name

Pickup Address City, State & Zip

Physical Address (if different from pickup address) City, State & Zip

YOUR Name & Phone # Hours Available for Pickup

Days/hours pickup is not allowed
(lunch hour if shut down)


Email address for BOL Do you need a truck with lift gate and pallet jack? YES NO

Where can the driver expect to find pallet on property? Please give clear directions

Special instructions or notes that will help driver locate pallet on site

	Pallet #1	Pallet #2	Pallet #3	Pallet #4	Pallet #5	Pallet #6	Pallet #7	Pallet #8	Pallet #9	Pallet #10	Pallet #11	Pallet #12	Pallet #13	Pallet #14	Total Boxes
Driver Side Count	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Passenger Side Count	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Total	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

PARTS INFORMATION

DESCRIPTION	PART #	QUANTITY
<p>Inflator for Front Passenger Air Bag Module (Includes inflator, harness, module mounting bolts, inflator stoppers and inflator securing nuts)</p>	<p>98561 – EM39A</p>	<p>1</p>
<p>Shorting Pin (Insulation Displacement Connector for 22-18 gauge wire)</p> 	<p>NAPA item # 784566</p> <p>Grainger Item # 4YT50</p> <p>or equivalent available from local auto supply</p>	<p>2</p>

HINT:

- **Make sure to return the removed (old / non-deployed) inflator in the box that the new inflator came in.**
- **Follow the return instructions beginning on page 24.**

CLAIMS INFORMATION

- There are six (6) Campaign ID numbers for this Campaign.
- Each Campaign ID number is assigned to specific vehicles (VINs).
- Use the VIN and Service COMM or DBS to select the correct ID #.
- Submit the warranty claim using the correct campaign ID #.

Submit a “CM” line claim using the following claims coding:

Campaign ID PM665:

Use this OP CODE if only the passenger air bag inflator is replaced.

CM ID	DESCRIPTION	OP CODE	FRT
PM665	Replace Passenger Air Bag Inflator	PM6650	0.9

Use this OP CODE for passenger air bag inflator replacement if the driver air bag inflator is replaced during the same service visit (see Repair Overview on page 2).

CM ID	DESCRIPTION	OP CODE	FRT
PM665	Replace Passenger Air Bag Inflator-2 (Use when also claiming Driver Air Bag Inflator)	PM6653	0.7

Campaign ID PM657:

Use this OP CODE if only the passenger air bag inflator is replaced.

CM I.D.	DESCRIPTION	OP CODE	FRT
PM657	Replace Passenger Air Bag Inflator	PM6570	0.9

Use this OP CODE for passenger air bag inflator replacement if the driver air bag inflator is replaced during the same service visit (see Repair Overview on page 2).

CM I.D.	DESCRIPTION	OP CODE	FRT
PM657	Replace Passenger Air Bag Inflator-2 (Use when also claiming Driver Air Bag Inflator)	PM6573	0.7

CLAIMS INFORMATION continues on the next page.

CLAIMS INFORMATION (continued)

Campaign ID PM676:

Use this OP CODE if only the passenger air bag inflator is replaced.

CM ID	DESCRIPTION	OP CODE	FRT
PM676	Replace Passenger Air Bag Inflator	PM6760	0.9

Use this OP CODE for passenger air bag inflator replacement if the driver air bag inflator is replaced during the same service visit (see Repair Overview on page 2).

CM ID	DESCRIPTION	OP CODE	FRT
PM676	Replace Passenger Air Bag Inflator-2 (Use when also claiming Driver Air Bag Inflator)	PM6763	0.7

Campaign ID PM818:

Use this OP CODE if only the passenger air bag inflator is replaced.

CM ID	DESCRIPTION	OP CODE	FRT
PM818	Replace Passenger Air Bag Inflator	PM8180	0.9

Use this OP CODE for passenger air bag inflator replacement if the driver air bag inflator is replaced during the same service visit (see Repair Overview on page 2).

CM ID	DESCRIPTION	OP CODE	FRT
PM818	Replace Passenger Air Bag Inflator-2 (Use when also claiming Driver Air Bag Inflator)	PM8183	0.7

Campaign ID PM823:

Use this OP CODE if only the passenger air bag inflator is replaced.

CM ID	DESCRIPTION	OP CODE	FRT
PM823	Replace Passenger Air Bag Inflator	PM8230	0.9

Use this OP CODE for passenger air bag inflator replacement if the driver air bag inflator is replaced during the same service visit (see Repair Overview on page 2).

CM ID	DESCRIPTION	OP CODE	FRT
PM823	Replace Passenger Air Bag Inflator-2 (Use when also claiming Driver Air Bag Inflator)	PM8231	0.7

CLAIMS INFORMATION continues on the next page.

CLAIMS INFORMATION (continued)

Campaign ID PM826:

Use this OP CODE if only the passenger air bag inflator is replaced.

CM ID	DESCRIPTION	OP CODE	FRT
PM826	Replace Passenger Air Bag Inflator	PM8260	0.9

Use this OP CODE for passenger air bag inflator replacement if the driver air bag inflator is replaced during the same service visit (see Repair Overview on page 2).

CM ID	DESCRIPTION	OP CODE	FRT
PM826	Replace Passenger Air Bag Inflator-2 (Use when also claiming Driver Air Bag Inflator)	PM8261	0.7

EXPENSE CODE

CODE	DESCRIPTION	MAXIMUM AMOUNT
041	Shorting Pin (Insulation Displacement Connector for 22-18 gauge wire)	\$0.50

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
April 6, 2017	NTB17-037	Original bulletin published
January 18, 2018	NTB17-037a	Information for DBS added to page 1, Campaign ID # added, and CLAIMS INFORMATION revised
February 8, 2018	NTB17-037b	CLAIMS INFORMATION and step 13 revised
June 14, 2018	NTB17-037c	Campaign ID # added and CLAIMS INFORMATION revised
July 12, 2018	NTB17-037d	Campaign ID # added and CLAIMS INFORMATION revised
August 16, 2018	NTB17-037e	Repair Overview added and CLAIMS INFORMATION revised
July 25, 2023	NTB17-037F	Pages 1-3, 5, 6, 23, 25, and 28 revised; pages 24, 26, and 27 added; "NOTE" references changed to "HINT"

