



Recall Campaign

NHTSA#: 17V-037
TC#: 2017-106

9904341 Install new handle and Inspect drawer .3 hr
9904341B Install new handle, inspect drawer AND adjust .5 hr

Date of Publication: March 2017

REQUIRES PARTS KIT

Action Required

Replace Outside Range Gas Valve Handle and Inspect drawer
Adjust Drawer when inspection confirms too low

Affected Units

2017 Fifth Wheels w outside Range	3X	Open Range	375RDS
	3X	Open Range	427BHS
		Mesa Ridge	367BHS
		Mesa Ridge	371MBH
		Mesa Ridge	374BHS
		Roamer	367BHS
		Roamer	371MBH
		Roamer	374BHS

2017 Travel Trailers w outside range	Mesa Ridge	292RLS
	Mesa Ridge	310BHS
	Mesa Ridge	328BHS
	Roamer	292RLS
	Roamer	310BHS
	Roamer	328BHS

Parts Kit 17V037

**Note: Kit can only be ordered using the order form
included with this bulletin.**

1 Gas Valve handle
1 6mm keps nut
1 label for handle

Misc.

10mm Socket

Replace Gas Valve Handle on Exterior Range

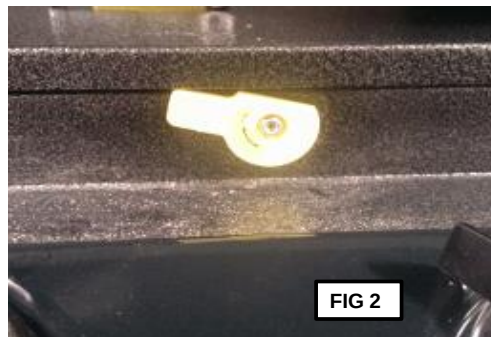
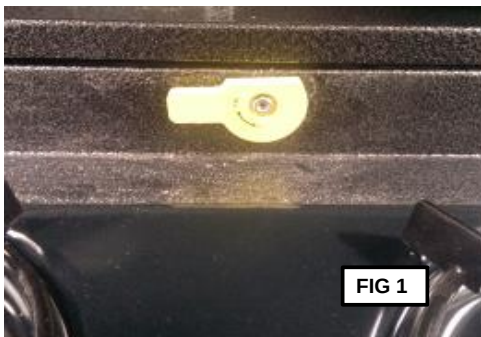


FIG 1&2: Old style gas valve handle allowed the drawer to close with the gas valve still in the open position

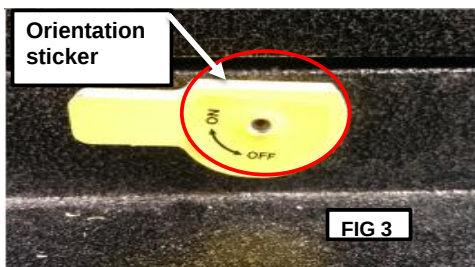


FIG 3: Remove the orientation sticker (on/off sticker) to gain access to the nylon lock nut of handle

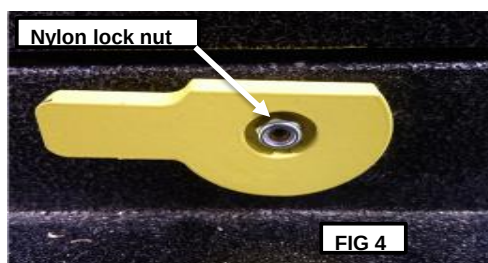


FIG 5: Remove 6mm nylon lock nut with 10mm socket.



FIG 6: Remove old style handle and nylon lock nut and discard.

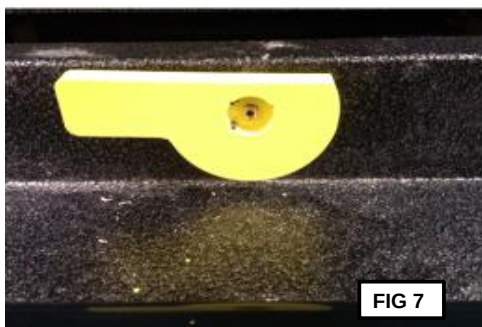


FIG 7: Install the new style handle.



FIG 8: Prep the 6mm "keps nut" by inserting into 10mm socket.



FIG 9: Install the 6mm "keps nut" by hand until snug.

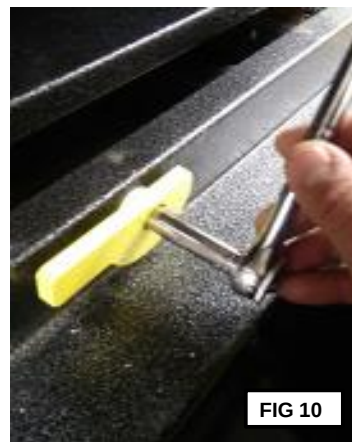


FIG 10: Tighten 1/4 turn of 10mm socket. **Note: DO NOT over tighten - brass threads will strip**

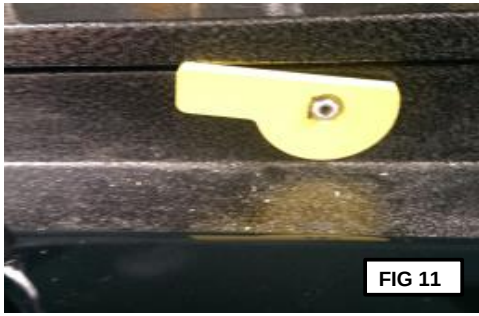


FIG 11

FIG 11: Verify operation. Check gas valve handle and ensure burner is extinguished before valve handle orientation allows for drawer storage.

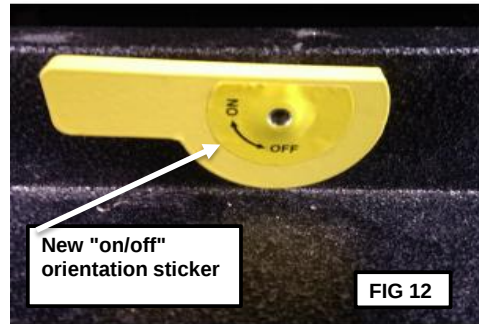


FIG 12

FIG 12: Install new orientation sticker (on/off sticker).

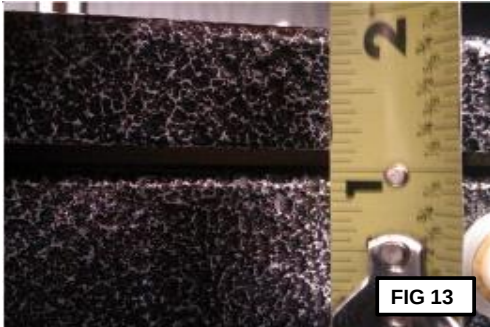


FIG 13

Important: the measurements of the drawer must be as noted below to ensure the drawer can not be closed with the gas valve handle in the open position.

FIG 13: Measure back splash of drawer in relation to front counter fascia. Drawer opening should be 1/8" +/- 1/16".

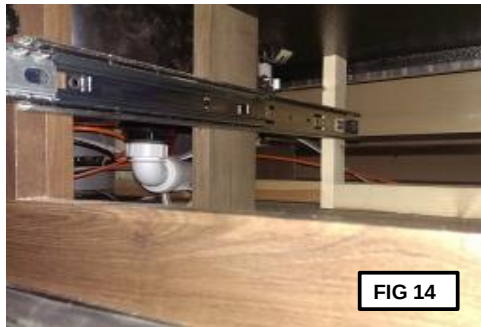


FIG 14

FIG14: If back splash of the stove assembly is too low, pull out drawer guides and adjust guide rails as needed.