



Highland
RIDGE RV

Recall Campaign

NHTSA#: 17V-561

Job Code: 9904359

TC#: 2017-440

Flate Rate: 0.3 hr

Action Required

Replace Tire and Federal Labels due to incorrect tire size noted as 235/80R16 when correct size tires on unit are 235/85R16

CHANGING THE FEDERAL CERTIFICATION LABEL AND TIRE LABEL

Remove existing label

1. Locate the appropriate label on the outside off door side (road side) front of the unit. Remove the existing Federal Certification Label AND Tire Label.
2. Using isopropyl alcohol and a shop rag, remove any adhesive residue from the surface where the original label had been. Allow the area to dry for at least 30 seconds.

Apply new label


3. Remove the protective back from the new label. Align the new label in the same location of the original label and apply it to the surface. Remove any air bubbles from the label.

NOTE: Do not attempt to remove or adjust the label once it has come into contact with the surface. Doing so may damage the label or cause it not to adhere properly to the surface. IF A LABEL IS DAMAGED OR WILL NOT PROPERLY ADHERE TO THE SURFACE, A NEW LABEL MUST BE ORDERED.

DO NOT COVER GRAPHICS OR LOGOS ON THE EXTERIOR OF THE TRAILER WITH NEW LABELS



FRONT RIGHT OFF DOOR SIDE (ODS)

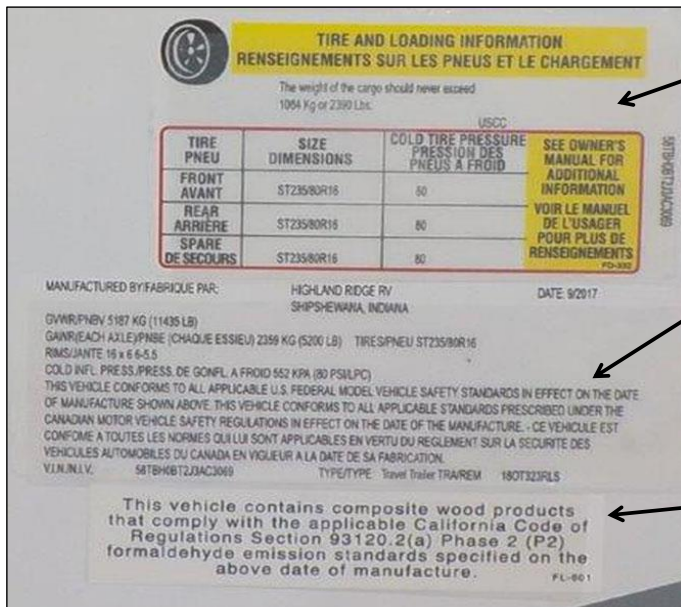

Place the Tire Pressure label above the Federal Certification label (Do NOT cover the Federal Certification label)

Place the Federal Certification label under the Tire Pressure label

Do NOT cover up the Formaldehyde Label when placing the new labels