



# VOLUNTARY RECALL CAMPAIGN

Classification:	Reference:	Date:
RS17-028E	ITB17-024E	July 24, 2023

## VOLUNTARY SAFETY RECALL CAMPAIGN 2006-2007 M; FRONT PASSENGER AIR BAG INFLATOR

This bulletin has been amended. See AMENDMENT HISTORY on the last page.  
Please discard previous versions of this bulletin.

**CAMPAIGN ID #s:** R1622, R1701, R1704, R1706, R1707

**NHTSA #s:** 15V-226, 16V-349, 17V-028

**APPLIED VEHICLES:** 2006-2007 M (Y50)

**Check Service COMM or Dealer Business Systems (DBS)  
National Service History to confirm campaign eligibility.**

### INTRODUCTION

Infiniti is conducting a Voluntary Safety Recall Campaign on certain specific model year 2006-2007 M vehicles to replace the passenger front air bag module and inflator. This service will be performed at no charge to the customer for parts or labor.

TK Services and RXO Logistics have issued return packaging, shipping labels, documents, and directions that must be used and followed in order to properly carry out this campaign. Information on this documentation is provided in this bulletin.

### IDENTIFICATION NUMBER


Infiniti has assigned identification numbers R1622, R1701, R1704, R1706, and R1707 to this campaign. Use Service COMM and the VIN to confirm the correct campaign ID number. The correct number must appear on all communication and documentation of any nature dealing with this campaign.

### RETAILER RESPONSIBILITY

It is the retailer's responsibility to check Service COMM or Dealer Business Systems (DBS) National Service History for the campaign status on each vehicle falling within the range of this voluntary safety recall which for any reason enters the service department. This includes vehicles purchased from private parties or presented by transient (tourist) owners and vehicles in a retailer's inventory. Federal law requires that new vehicles in retailer inventory which are the subject of a safety recall must be corrected prior to sale. Failure to do so can result in civil penalties by the National Highway Traffic Safety Administration. While federal law applies only to new vehicles, Infiniti strongly encourages retailers to correct any used vehicles in their inventory before they are retailed.

Infiniti Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **HINT:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Infiniti retailer to determine if this applies to your vehicle.

## REPAIR OVERVIEW

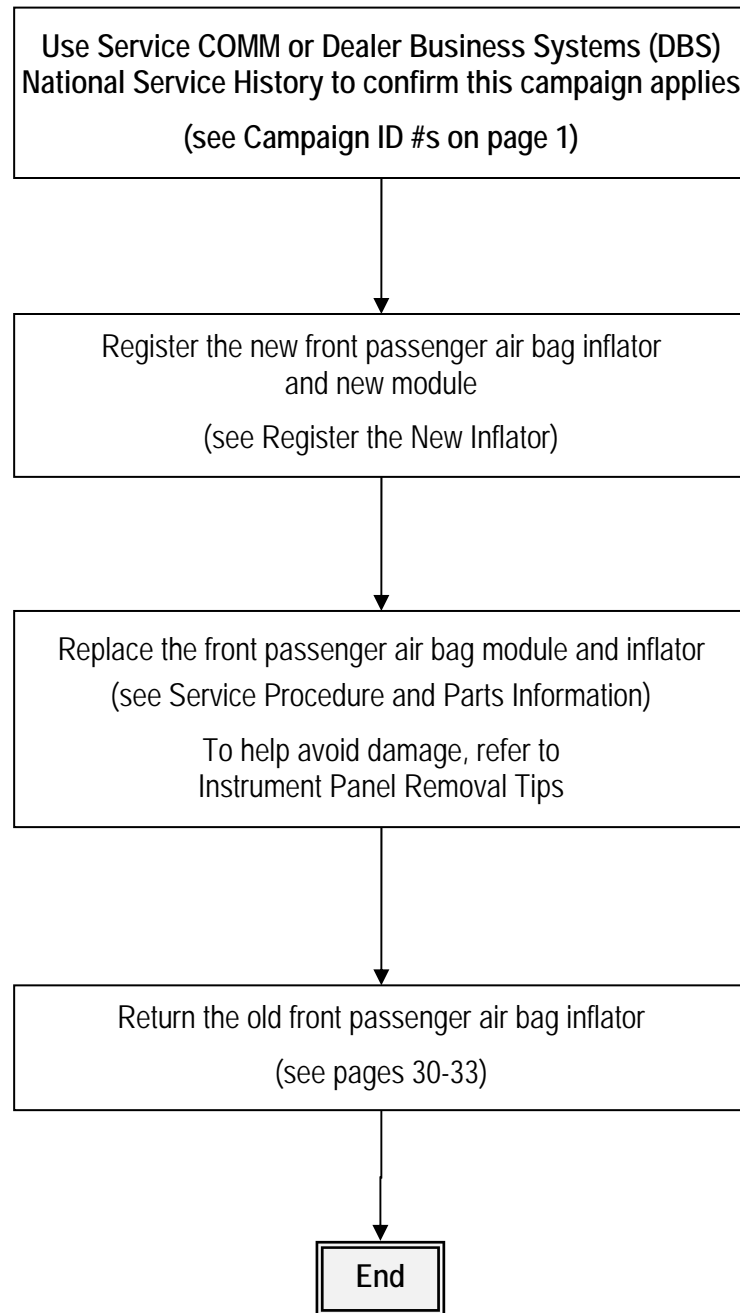

## REQUIRED SPECIAL TOOLS

- Air Bag Module Support J-51315-KIT
  - New tool part number NI-51315-KIT

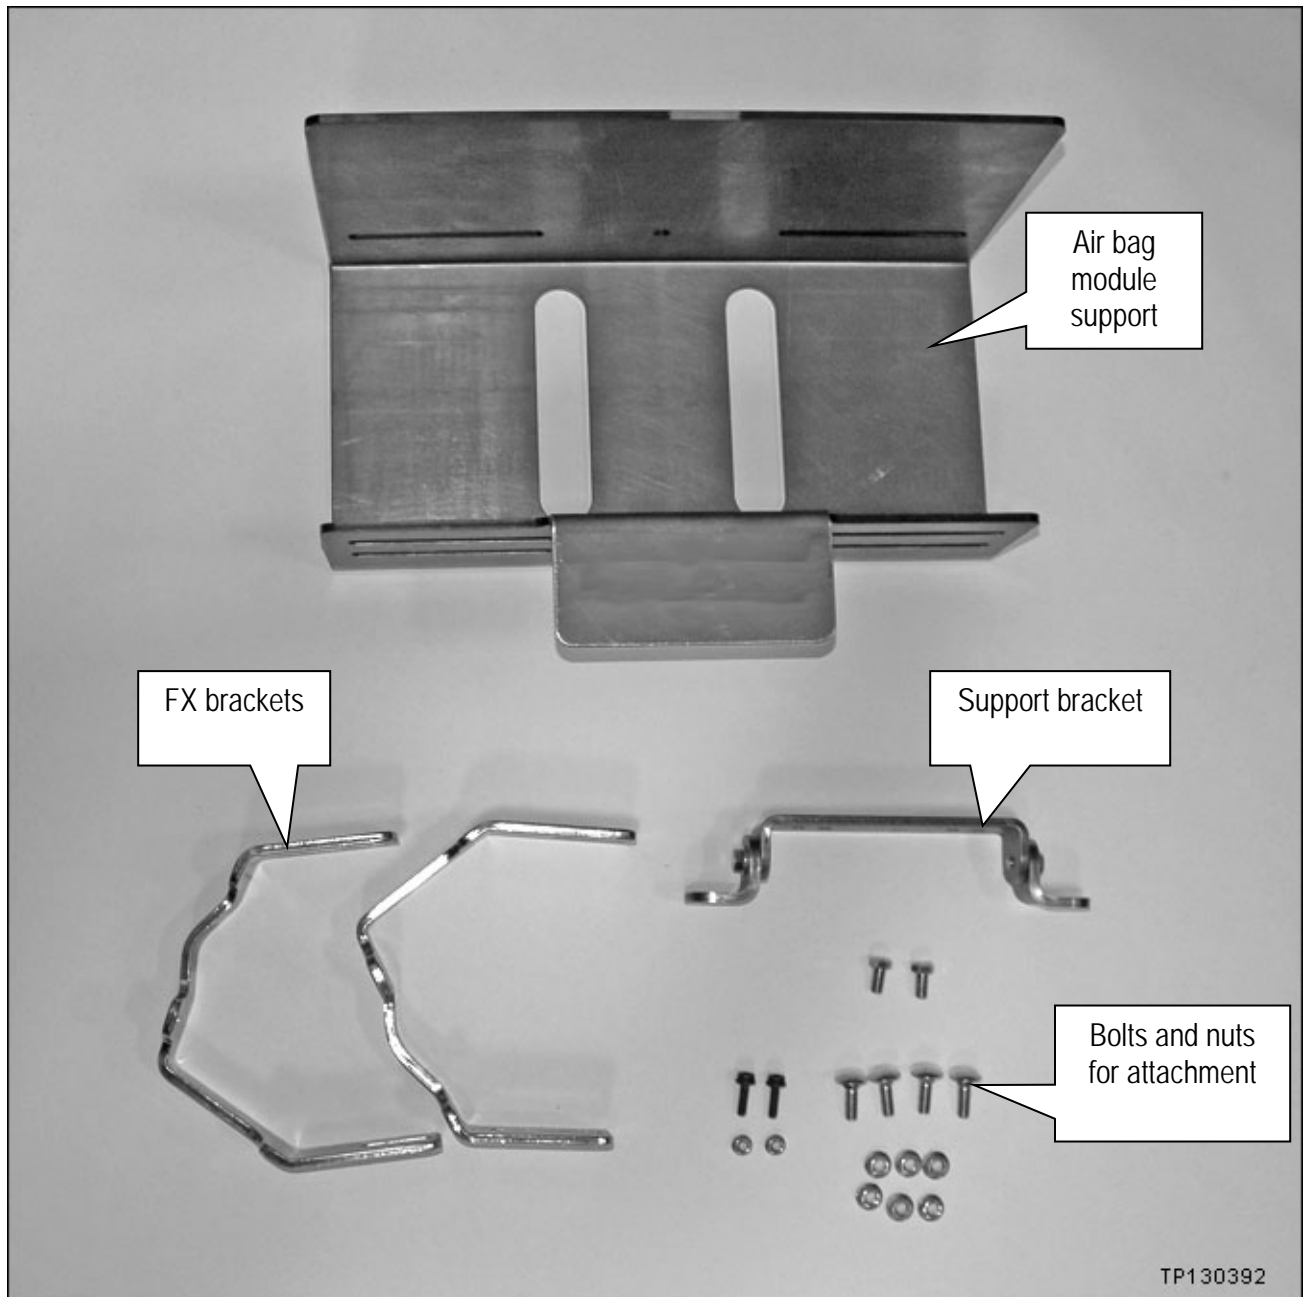


Figure A

## REQUIRED SPECIAL TOOLS (continued)

### Quick Scan Tool (J-52352)

- Each retailer has been previously shipped one Quick Scan Tool (J-52352).
  - New tool part number NI-52352.



Figure B

Additional tools may be purchased from TechMate: [www.TechMateTools.com](http://www.TechMateTools.com) or 1-833-397-3493.

## SERVICE PROCEDURE

### Register the New Inflator and the New Module

1. Obtain a new inflator and a new module kit from your parts department.
  - New inflator and new module kit are listed in the Parts Information.

2. Attach the quick scan tool (J-52352) to your CONSULT PC USB port.

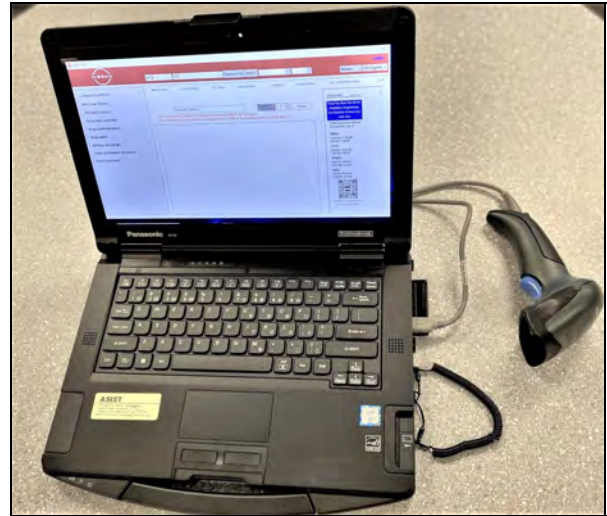


Figure 1

3. On the left side of the ASIST main menu, select **TECH SUPPORT INFO**, then **Inventory Vehicle Actions**.

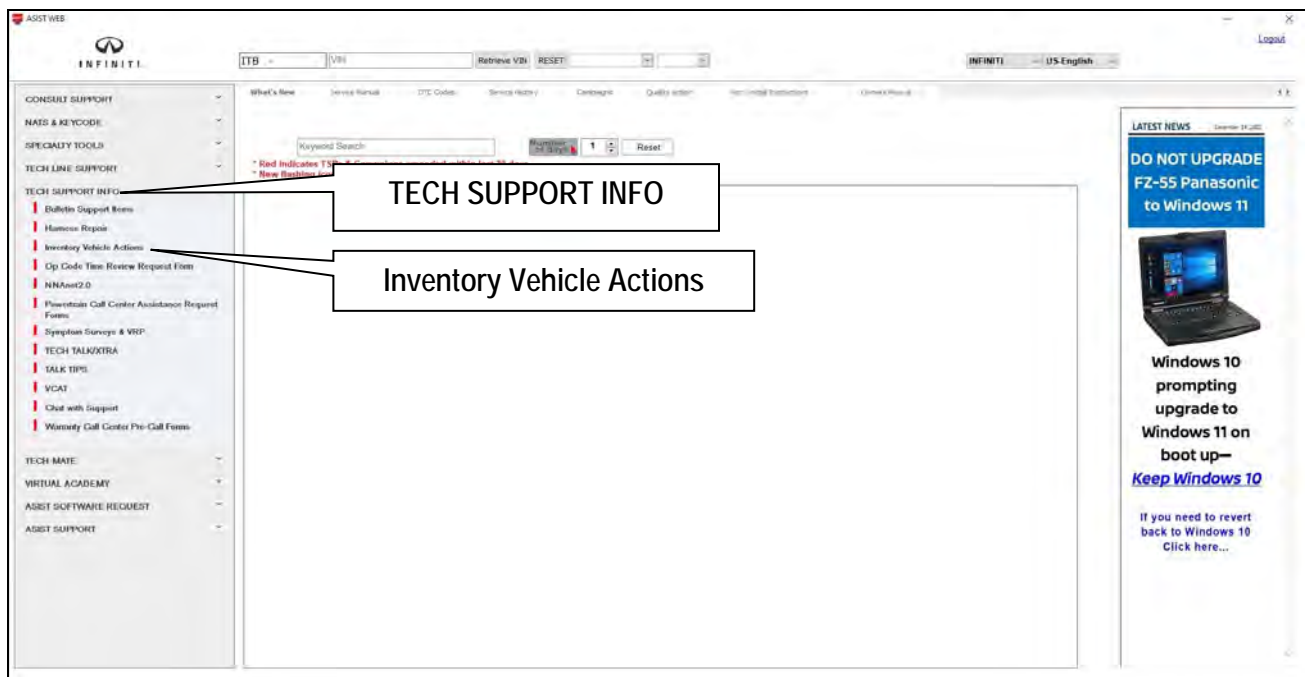


Figure 2



4. Select **CLICK HERE...** next to **Airbag to VIN Registration**.

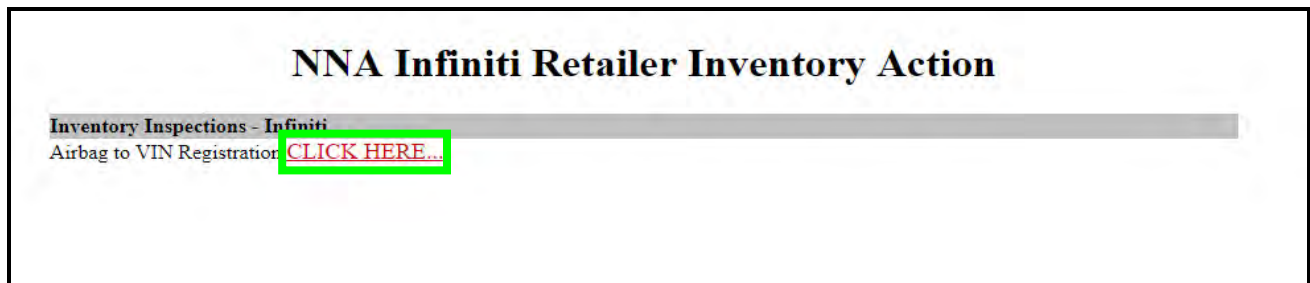


Figure 3

## Register the New Inflator

5. Use the quick scan tool to scan the bar code (VIN) on the vehicle B-pillar label.

**HINT:**

- Some labels may not scan quickly.
- Hold the scan tool approximately 6 inches away from the label.
- Hold the trigger down until the label is read (this may take several seconds).
- The VIN will automatically populate (see Figure 5).
- If needed, VIN can be entered manually.



Figure 4

**Airbag to VIN Registration**

11/28/2016 1:36:32 PM

**Please enter/scan the VIN and Airbag Inflator Serial Number**

**Dealer Code**

**Key Number**

**VIN**

**Airbag Serial Number**  **Submit**

Step 7; see next page.

(Select submit after both fields are populated).

Figure 5

6. Use the quick scan tool to scan the bar code (serial number) on the side of the box of the new inflator (see Figures 6 and 7).
  - The serial number will automatically populate (see Figure 5).

**HINT:** DO NOT scan the part number label.



Figure 6

**HINT:** If needed, the serial number can be entered manually.

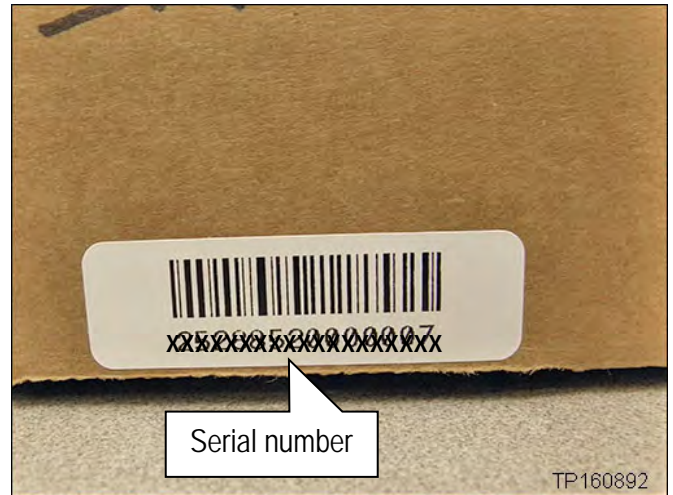


Figure 7

7. Select **Submit** on the ASIST screen (see Figure 5 on the previous page).

## Register the New Module

8. Use the quick scan tool and scan the bar code (VIN) on the vehicle B-pillar label a second time.

**HINT:**

- Some labels may not scan quickly.
- Hold the scan tool approximately 6 inches away from the label.
- Hold the trigger down until the label is read (this may take several seconds).
- The VIN will automatically populate (see Figure 9 on the next page).
- If needed, VIN can be entered manually.



Figure 8



**Airbag to VIN Registration**

11/28/2016 1:36:32 PM

**Please enter/scan the VIN and Airbag Inflator Serial Number**

**Dealer Code**

**Key Number**

**VIN**

**Airbag Serial Number**  **Submit**

Step 12; see next page.

(Select submit after both fields are populated).

Figure 9

9. Open the Module Kit shipping container.
  - New module is included in the Module Kit.
10. Locate the bar code sticker on the new module.
 

**HINT:** The new module will be left in the shipping container until later in this procedure.
11. Use the quick scan tool to scan the bar code (serial number) on the new module (see Figures 10 and 11).
  - The serial number will automatically populate (see Figure 9).

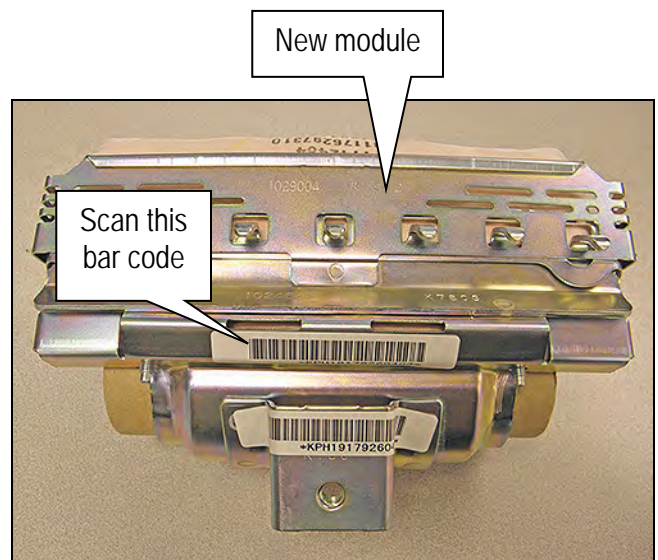


Figure 10

**HINT:** If needed, the serial number can be entered manually.

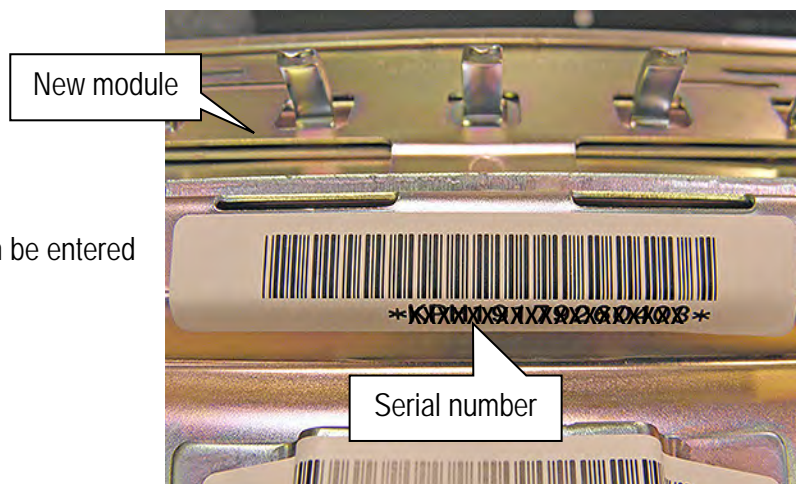


Figure 11

12. Select **Submit** on the ASIST screen (see Figure 9 on the previous page).

## Inflator and Module Replacement

### IMPORTANT:

- Follow all cautions, warnings, and notes in the Electronic Service Manual (ESM) when working on or near a Supplemental Restraint System (SRS), such as an air bag.
- To help avoid damage, refer to Instrument Panel Removal Tips starting on the next page.

**CAUTION:** Handle interior trim carefully to avoid damage. Work with clean hands and clean tools to avoid dirt and stains. Use protective covers as needed.

13. Write down the radio settings.

Presets	1	2	3	4	5	6
AM						
FM 1						
FM 2						
SAT 1						
SAT 2						
Bass	Treble		Balance		Fade	Speed Sen. Vol.

14. Turn the ignition OFF.
15. Disconnect both battery cables, negative cable first.
16. Wait at least 3 minutes.
17. Remove the passenger air bag module (module) from the vehicle.
- Refer to the ESM, Section **RS-Restraint System**, for module removal.
  - Refer to Instrument Panel Removal Tips starting on the next page.
18. Once removed, set the module in a clean working area.
- Go to page 18.

## Instrument Panel Removal Tips

**HINT:** To remove the module, the instrument panel needs to be removed. Refer to the tips on the next few pages to help avoid damage to the grilles and instrument panel.

Upper ventilator grille:

- Carefully pry with a suitable plastic trim tool.



Figure 12

- When there is enough of a gap, insert a second plastic trim tool to unsnap more pawls.

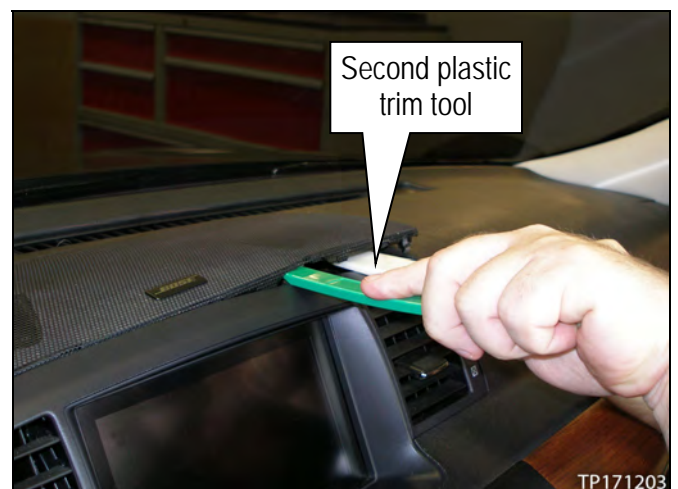


Figure 13

- When able, unsnap the remaining pawls by hand, and then remove the upper ventilator grille.



Figure 14

Center ventilator grille:

- Place plastic inserts or similar material between the sides of the center ventilator grille and instrument panel pad.
- This will keep the center ventilator grille locator tabs from “catching” the instrument panel pad during removal.
- See Figure 16 for samples of plastic inserts.

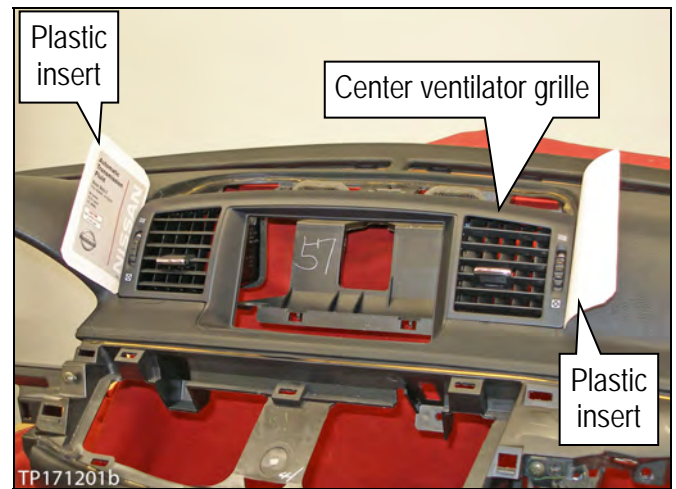


Figure 15



Figure 16

- See location of locator tabs and where they fit in the instrument panel pad in Figure 17 and 18.

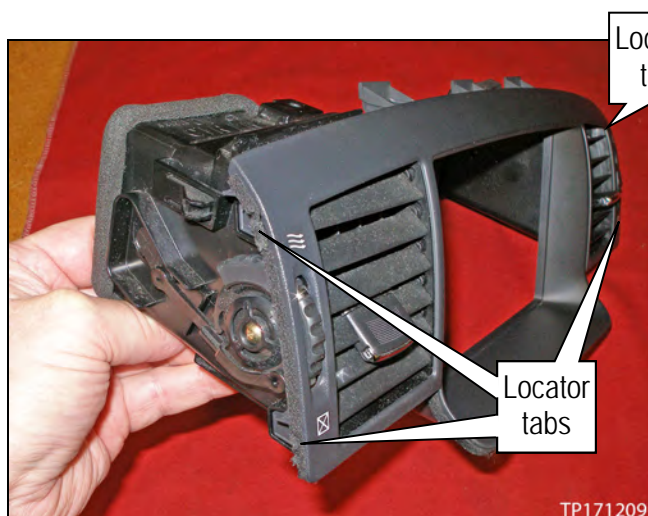


Figure 17


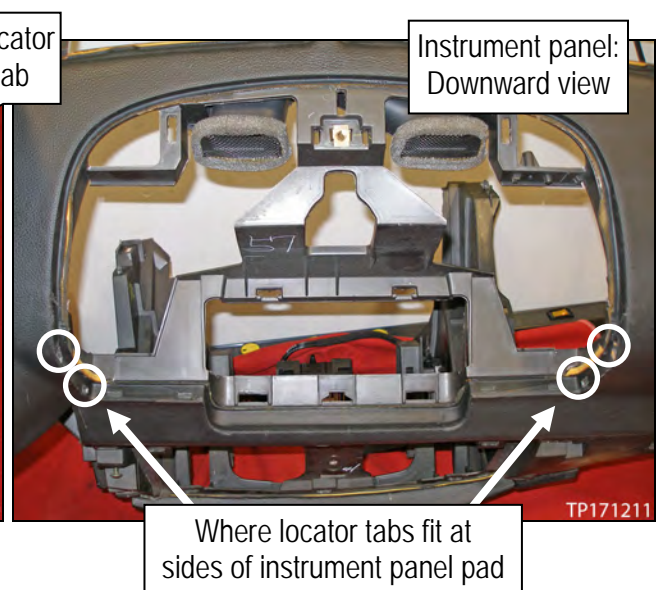


Figure 18



- Grab the center ventilator grille, and then pull up.

**CAUTION:** Removing the center ventilator grille in a direction other than up may cause damage to its lower pawls, or instrument panel pad.

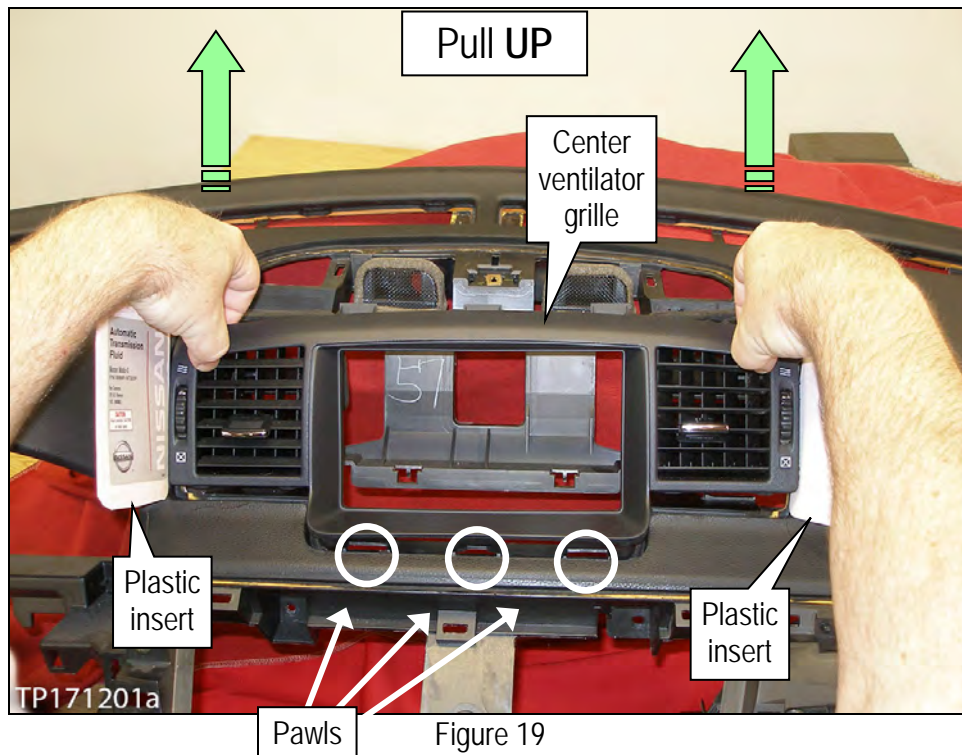

## Side ventilator grilles:

- Remove the screw at the side of each side ventilator grille.
- Place plastic inserts or similar material between the sides of the side ventilator grilles and instrument panel pad.
  - LH side ventilator grille shown.
  - See Figure 16 for samples of plastic inserts.

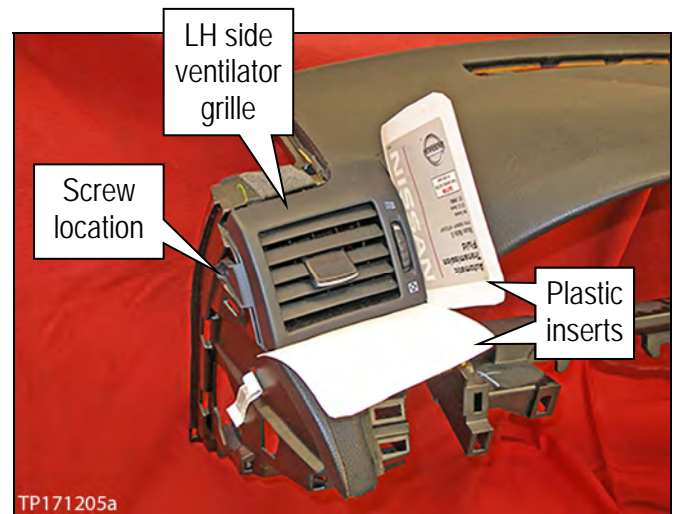


Figure 20



Figure 21

- See location of pawls and related locator tabs and where they fit in the instrument panel pad in Figure 21, 22, and 23.

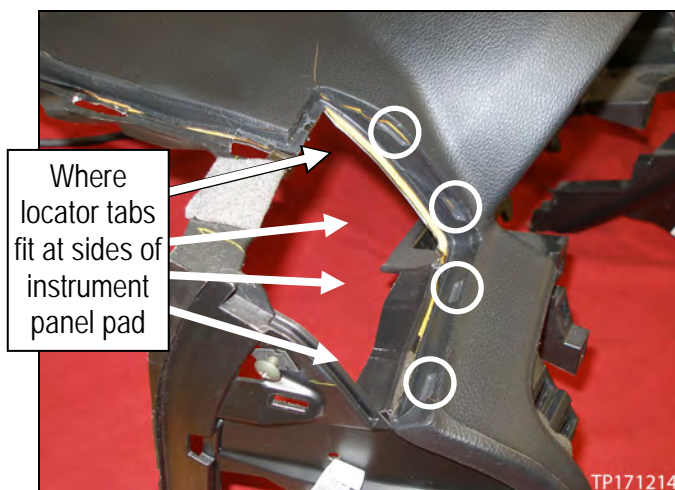


Figure 22

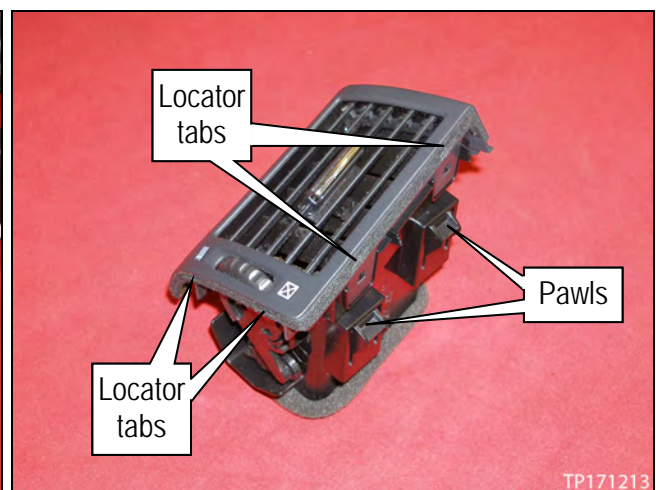


Figure 23

- Remove the side ventilator grille as shown in Figure 24.

**CAUTION:** Removing the side ventilator grilles in a different manner may cause damage to it or the instrument panel pad.

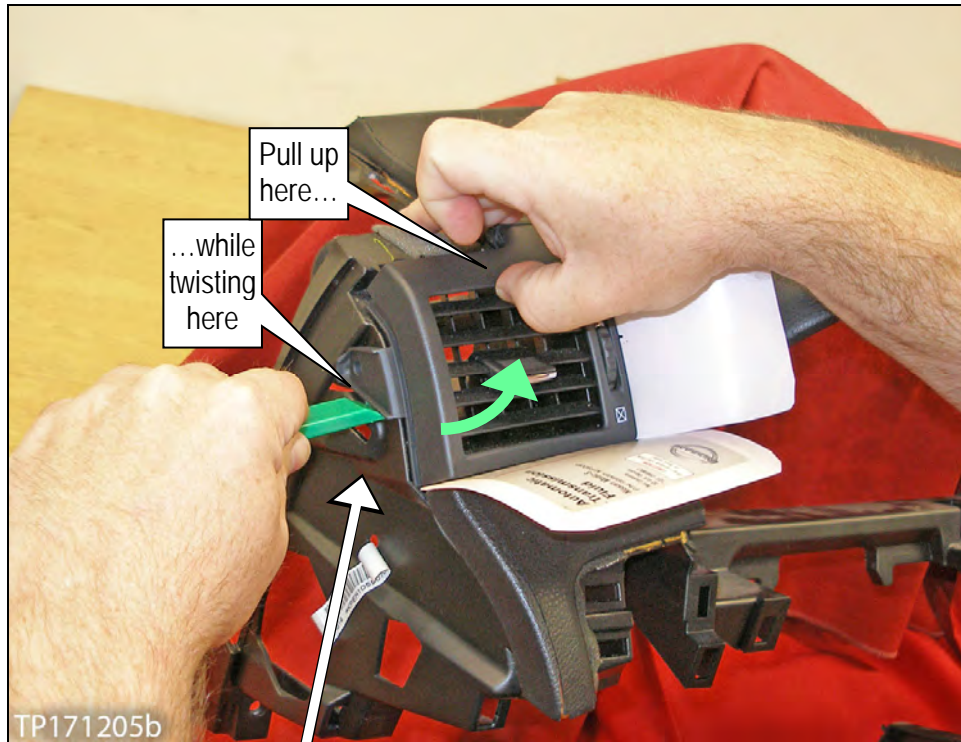


Figure 24



Figure 25



## Front defroster grilles:

- Carefully unfasten/disconnect/remove the sensors in both LH and RH defroster grilles.
  - Use a pick or other similar tool. Do not pry on the defroster grille, simply pull up.

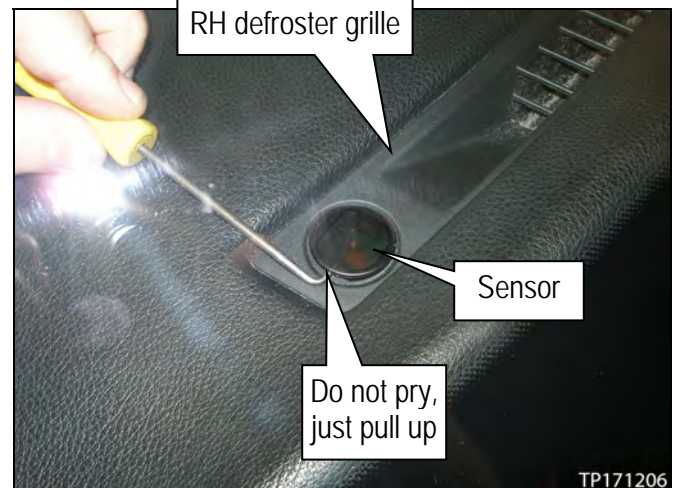


Figure 26

- Place a plastic insert or similar material between the defroster grille and instrument panel pad.
  - This will keep the defroster grille from "catching" onto the instrument panel pad.
  - Examples of plastic inserts shown in Figure 16 can be used.
  - With the same type or similar tool used in Figure 26, hook under the defroster grille, and then carefully pull up.
- When able, take hold of the defroster grille, and then slide the plastic insert in the direction of (carefully) lifting up and unsnapping the pawls.
- If the pawls will not release, use a suitable pick and gently pry them loose (toward the defroster grille's opening).

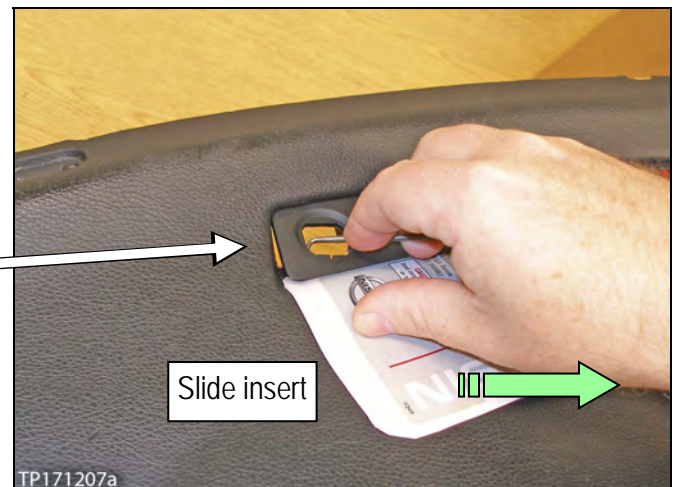


Figure 27

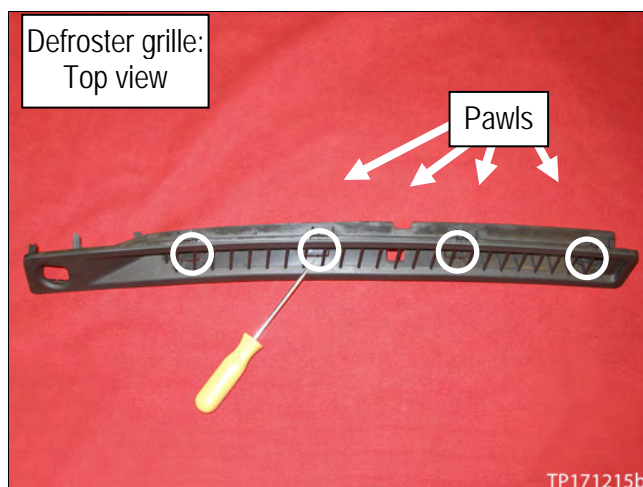


Figure 28

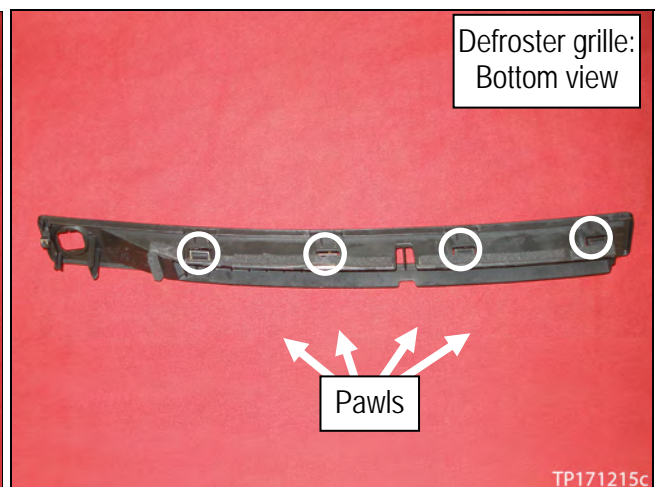


Figure 29

19. Securely mount the air bag module support (support) in a vise (see Figure 30 and 31).

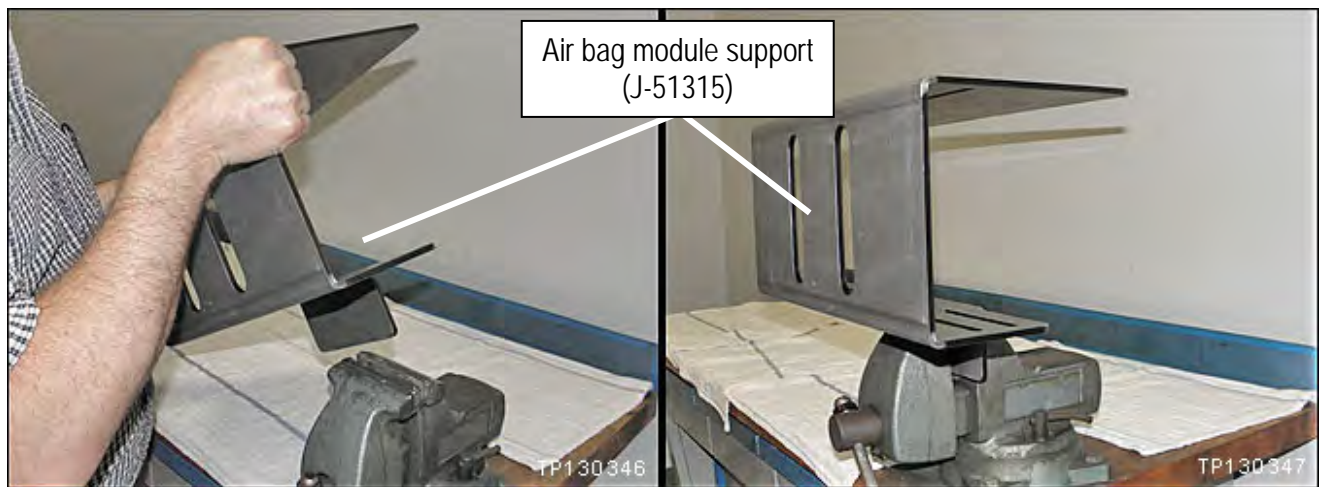


Figure 30

Figure 31

**WARNING:**

- Work from behind and to the sides of the support.
- Wear safety glasses while performing inflator replacement.

20. Unclip the harness from the harness guides.

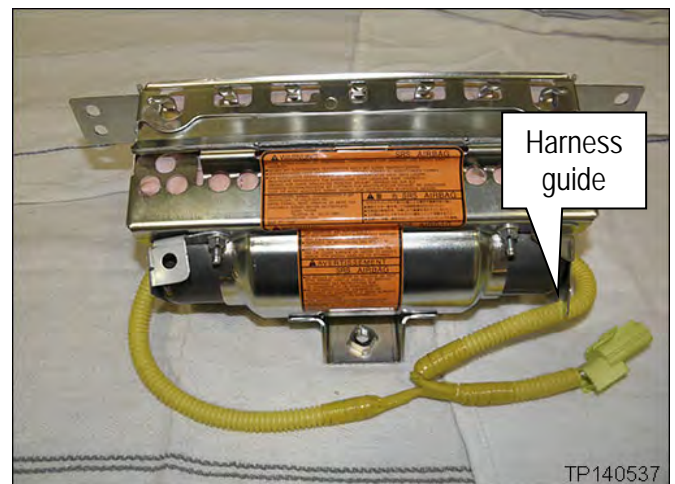


Figure 32



21. Attach the FX brackets to the support as shown.
- Make sure the convex parts of the brackets are in the UP position.
  - Use bolts and nuts supplied with the support.
  - Leave the bolts/nuts slightly loose to allow for positioning of the module.

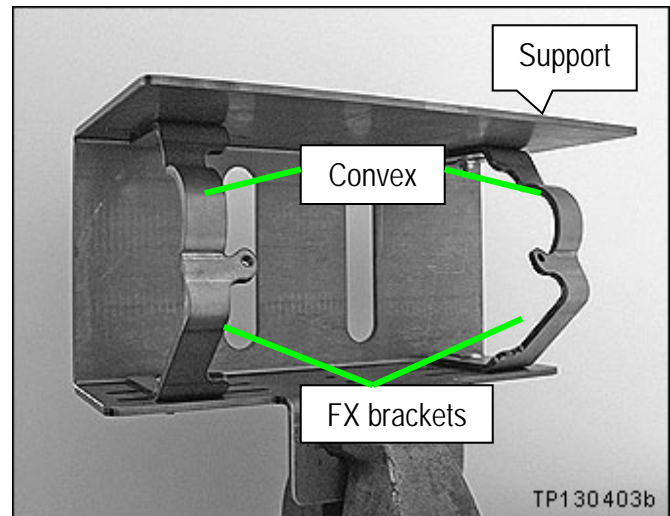


Figure 33

22. Attach the module to the FX brackets in the support as shown.
- Use bolts and nuts supplied with the support.
  - Make sure the arrow on the bag is pointing down.

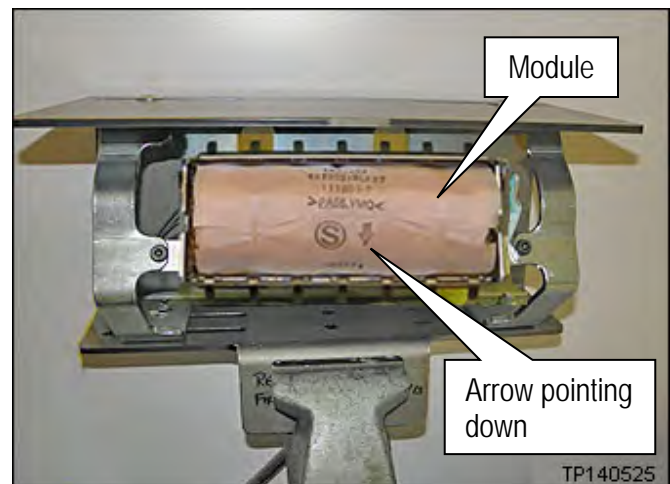


Figure 34

23. Make sure the module is centered in the support.

**HINT:** Centering the module in the support will allow access to the inflator securing nuts through the slots in the support.

24. Tighten all of the mounting bolts and nuts that hold the module and brackets to the support.

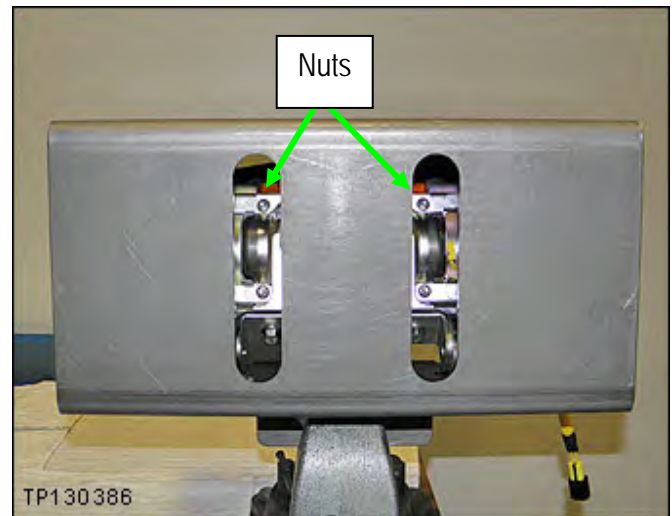


Figure 35

**WARNING:** Work from behind and to the sides of the support.

25. Carefully cut a few inches of the yellow corrugated harness cover in the area shown.
- **Do not** cut the wires inside the corrugated cover.

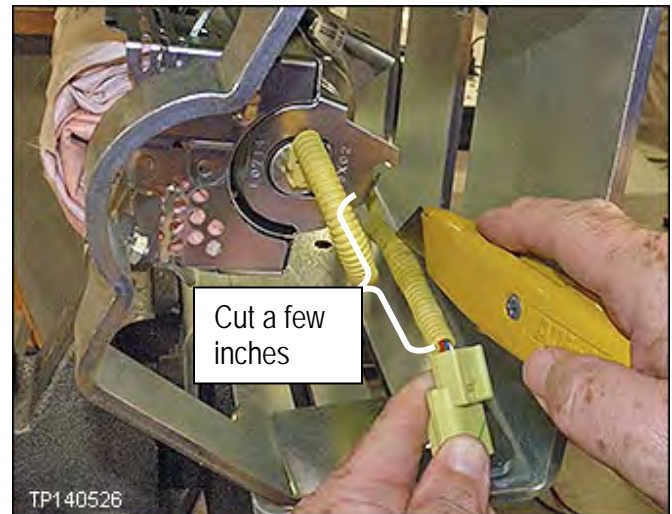


Figure 36

26. Attach 2 shorting pins to the inflator harness as shown.

- Make sure to pair the wires from each end of the inflator.

**Blue with White**

**Red with Yellow**

- Use an insulation displacement type wire connector as a shorting pin.
- Refer to the Parts Information for additional connector/shorting pin information.

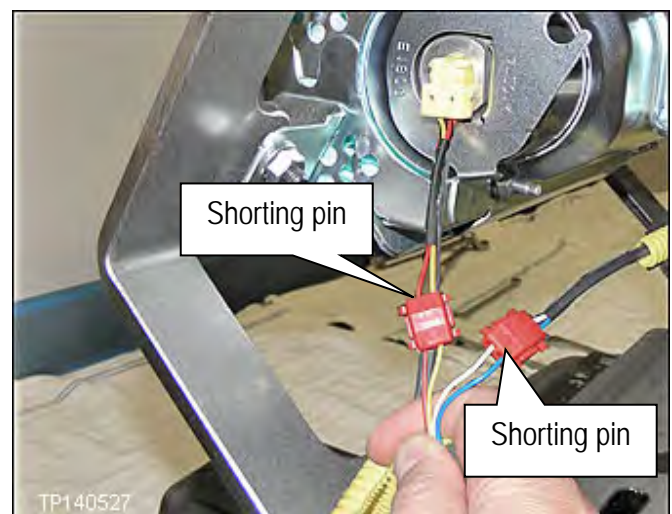


Figure 37

27. Cut off the connector end of the harness.



Figure 38

28. Remove the 4 nuts from the module that hold the inflator in place (see Figures 39 and 40).
- Use a ratchet and extension.



Figure 39

- Remove the 4 nuts.

**HINT:** These nuts will not be reused.

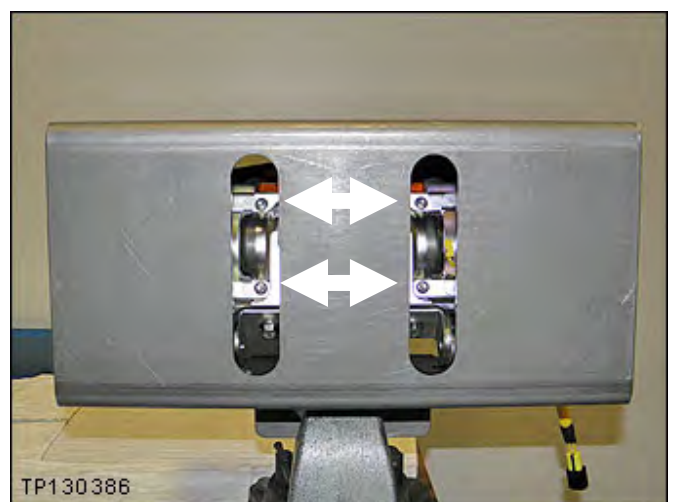


Figure 40



29. Remove the inflator stopper.

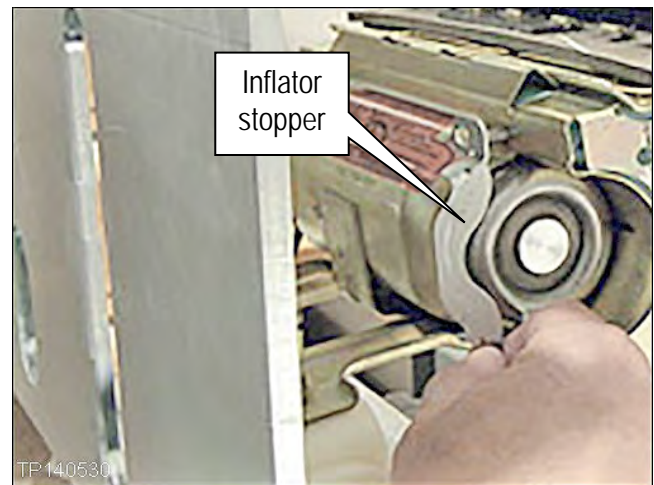


Figure 41

30. Push the left side of the inflator out of the module.
- Twist the inflator to a position that will allow the connector and harness to fit through the opening.

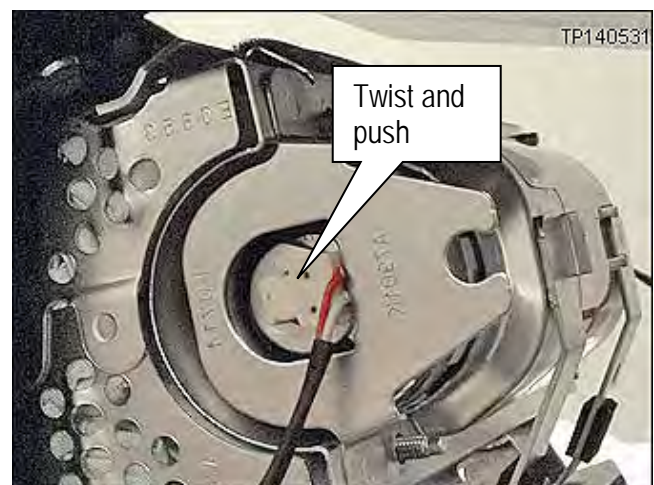


Figure 42

31. Pull the inflator completely out of the module from the right side.
32. Set the old inflator in the clean working area and make sure it does not roll and fall to the floor
33. Remove the old module from the FX brackets in the support.

**IMPORTANT:** This old module will not be reused.



Figure 43

**IMPORTANT:** In the following steps, a new module and inflator are used.

34. Remove the new module from its shipping container.
  - New module is included in the Module Kit.
35. Slide the paper tube out of the new module.

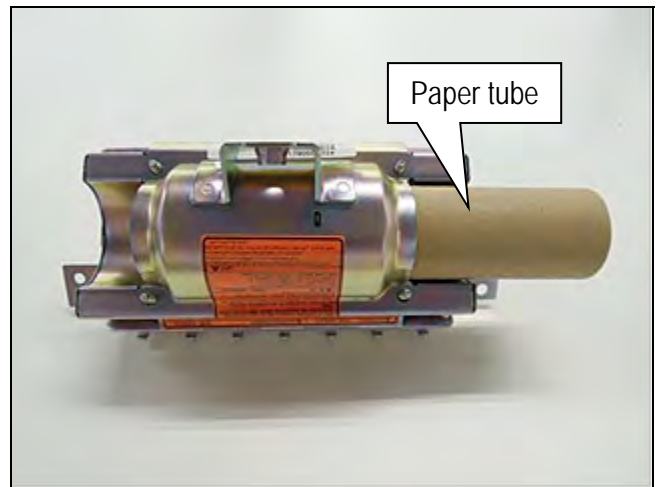


Figure 44

36. Install the **left** side inflator stopper bracket with nuts finger tight.
  - Make sure to **use new nuts**.
  - New nuts and new stopper bracket are included in the Module Kit.

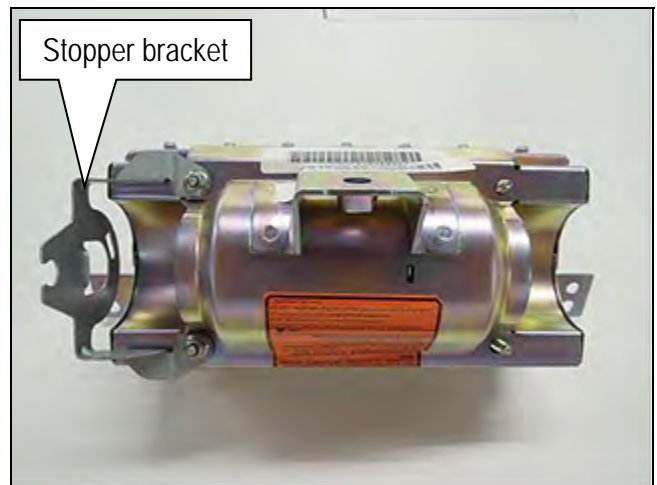


Figure 45

37. Attach the new module to the FX brackets in the support as shown.
  - Use bolts and nuts supplied with the support.
  - Make sure the arrow on the bag is pointing down.

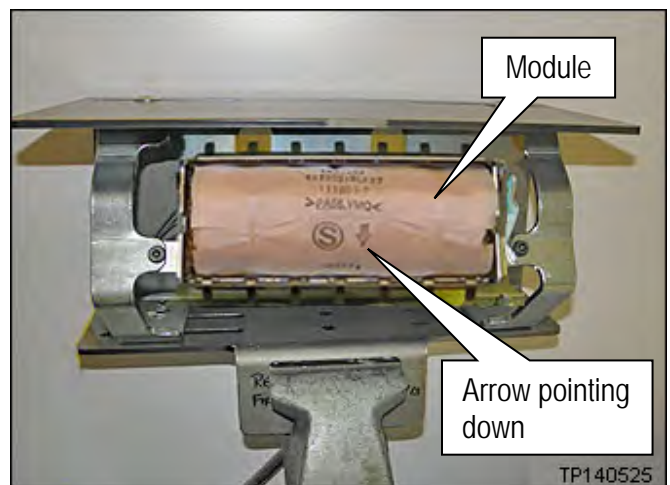


Figure 46

38. Remove the new inflator from the box.
39. Place the removed (old / non-deployed) inflator in the box that the new inflator arrived in.
  - Follow the return instructions provided by TK Services and RXO Logistics.
  - Return instructions provided by TK Services and RXO Logistics are attached to this bulletin on page 31.



## Install the New Inflator into the New Module

40. Insert the new inflator large end first, as shown in Figure 47 from the right side.

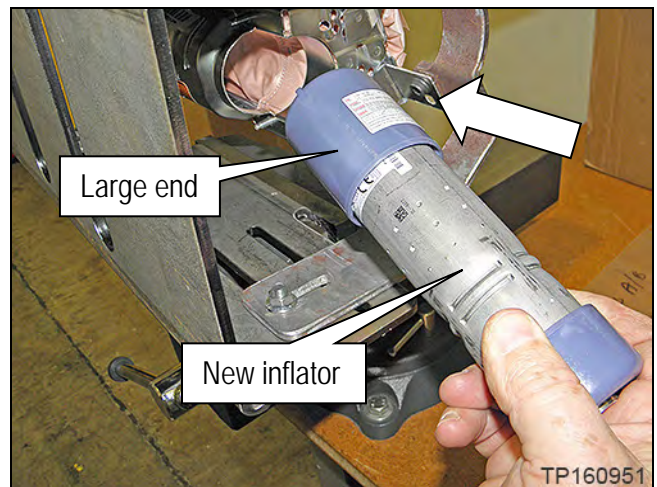


Figure 47

41. Align the inflator tab and then insert it through the hole in the left side inflator stopper bracket.

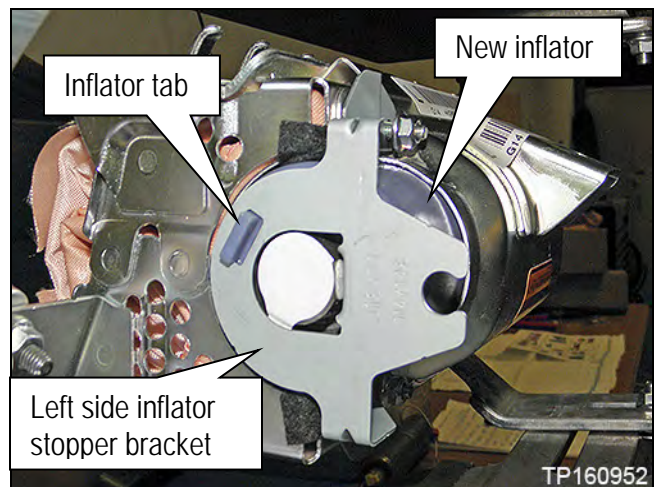


Figure 48

42. Install the **new** right side inflator stopper bracket (shown in Figure 49) with nuts finger tight.
- Make sure to **use new nuts**.
  - New nuts and new stopper bracket are included in the Module Kit.

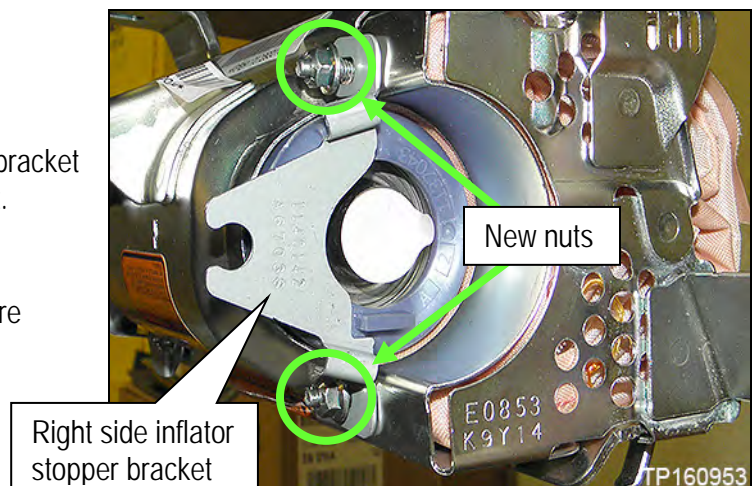


Figure 49

43. Push the new right side inflator stopper bracket against the Inflator.

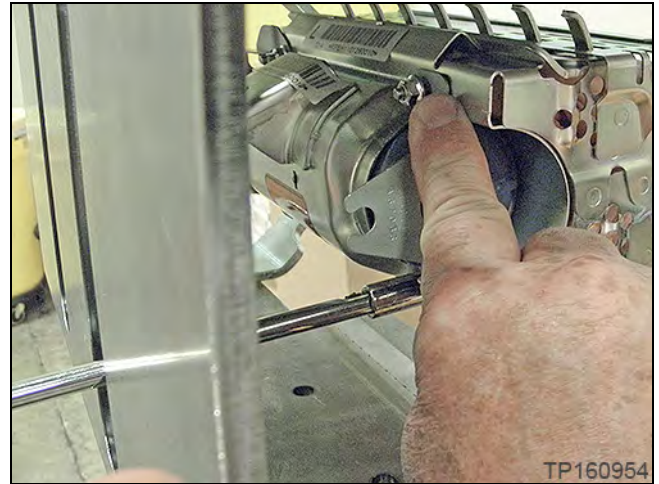


Figure 50

- Make sure the inflator is pushed all the way into its housing – no gap on the left side (see Figure 51).
- Make sure there is no gap between the inflator stopper bracket and the inflator on the right side (see Figure 51).

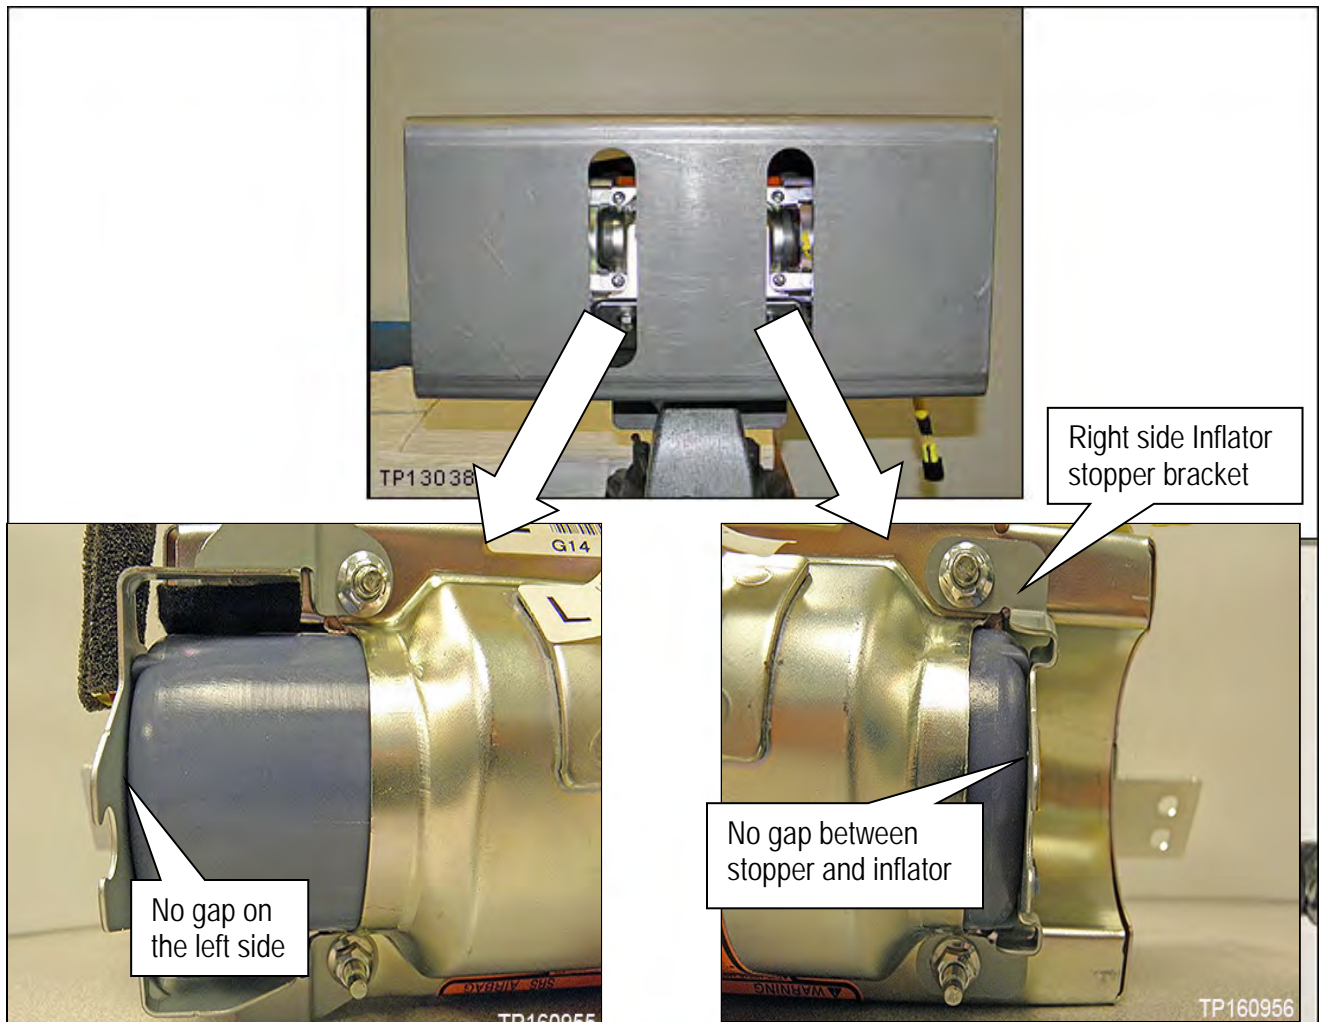


Figure 51

44. Torque the 4 inflator securing nuts.
- Torque nuts to: 3.9 N•m (0.39 kg-m, 34 in-lb).
  - Torque in the order shown.

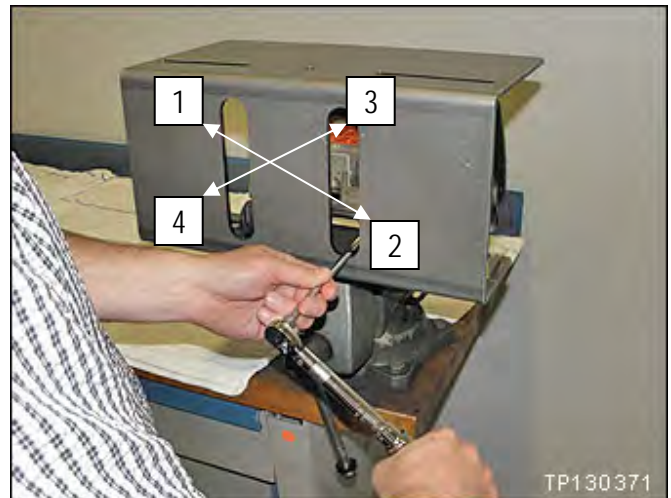


Figure 52

**IMPORTANT:**

- In the next step, on the next page, you will be attaching the new harness to the new inflator.
- Once an inflator connector is attached to the inflator, it cannot be disconnected.
- Make sure to attach the connectors to the correct ends of the inflator (see Figure 53).



45. Attach the new harness to each end of the inflator.
- Remove the dust proof stickers covering the ends of the inflator.
  - Refer to Figures 53, 54, and 55.

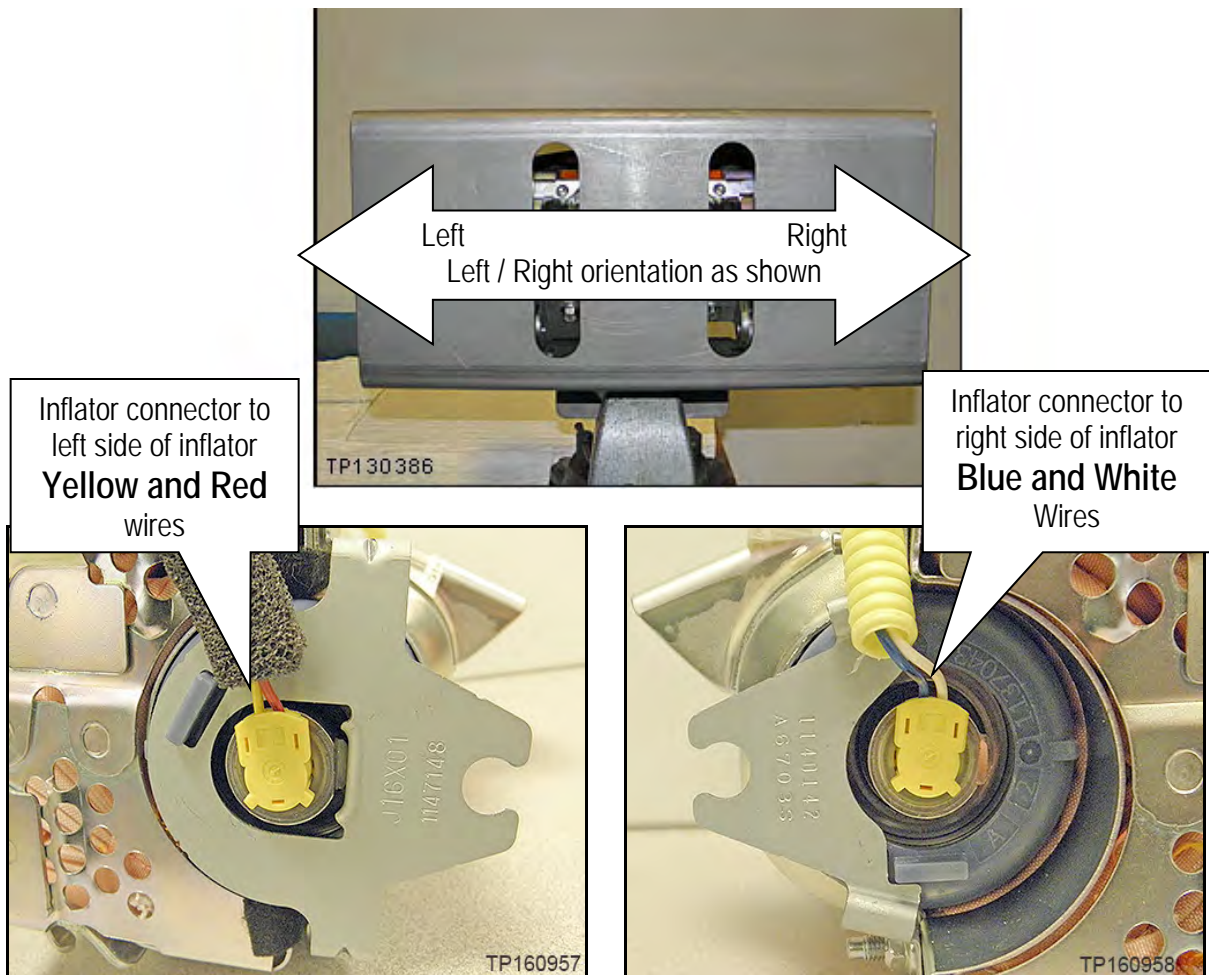


Figure 53

- Make sure the T shape at the inflator end aligns with the T shape of the connector.

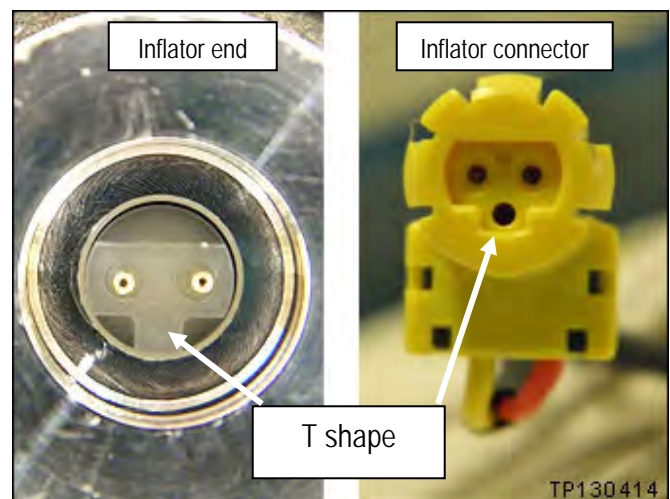


Figure 54

- Make sure harness connector is fully engaged / seated (see Figure 55).

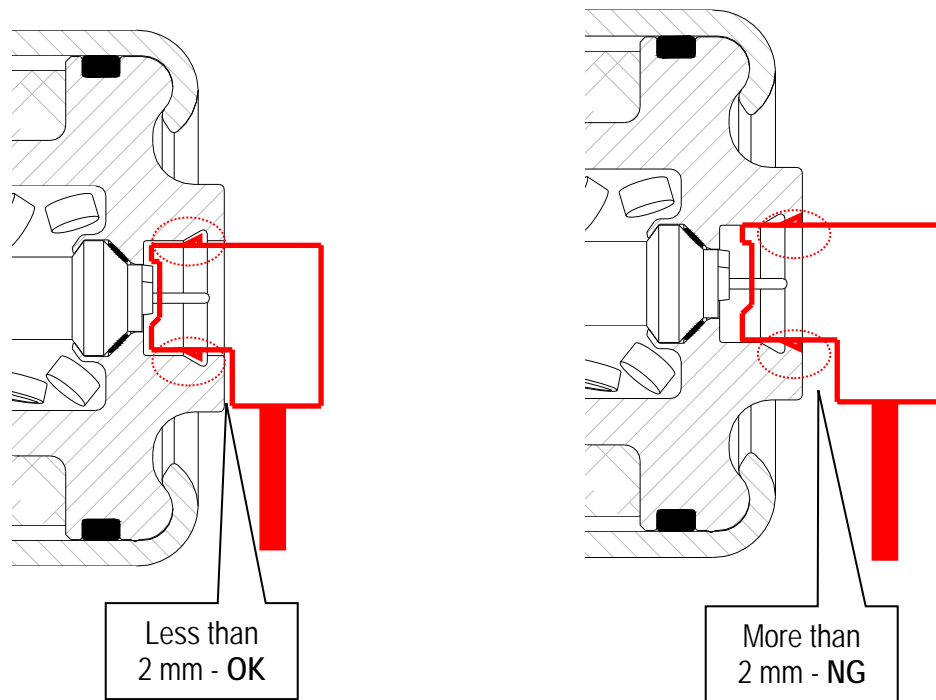


Figure 55

46. Remove the module from the support and set it on the clean working area.



Figure 56



47. Reinstall the module into the vehicle in reverse order of removal.
- Make sure to use the new "one time use" module mounting bolt included with the Module Kit, listed in the Parts Information.
48. Re-connect both battery cables – positive cable first.
49. Reset the clock and the radio settings.
50. Turn the ignition from OFF to ON and observe the air bag warning light:
- Light should illuminate for 7 seconds and then go out.
- HINT:** If the Air Bag Warning light does not operate as described above there may be an issue not covered by this campaign. Refer to ASIST and the appropriate Service Manual for additional diagnostic and repair information.
51. Return the removed (old / non-deployed) air bag inflator in the box that the new air bag inflator arrived in.
- TK Services and RXO Logistics have provided return instructions for the recalled Takata inflators and modules at pages 30-33 of this bulletin.
    - **Reminder:** Federal Hazardous Material Regulations (HMR) govern preparation of shipments of hazardous materials and prohibit handling and preparation for shipment by any person who is not trained and certified as required by the HMR. The HMR impose specific requirements for retailers, packaging, labeling and pre-transportation functions. Violations can result in civil penalties by the Pipeline and Hazardous Materials Safety Administration. (Title 49 Code of Federal Regulations Subchapter C)

## **Hazardous Materials Training/Certification Responsibility**

In accordance with Title 49, Code of Federal Regulations (49 CFR), Sections 172 Subpart H and 173.1(b), it is the responsibility of the dealer to ensure that every employee handling and preparing hazardous materials for shipment is properly trained/certified. Initial and recurring training can be completed by contacting one of the training companies listed below, or any other company that offers hazardous material training/certification.

### **SHIPMATE, INC.**

Hazardous Materials Training & Consulting 780 Buckaroo Trail, Suite D Sisters, OR 97759 Website: [www.shipmate.com](http://www.shipmate.com), Tel: 310.370.3600, Fax: 310.370.5700

### **DGI Training Center**












West Seminar Registrations and On-Site Information 1060 El Camino Real, Suite B Redwood City, CA 94063-1645 Website: [www.dgitraining.com](http://www.dgitraining.com), Tel: 650.306.8450 or 800.338.2291

### **Lion Technology**

570 Lafayette Rd. Sparta, NJ 07871-3447 Email: [info@lion.com](mailto:info@lion.com), Tel: 888.546.6511, Fax: 973.579.6818

# TAKATA AIRBAG RECALL RETURN INSTRUCTIONS

IMPORTANT: Must be performed by certified DOT HAZMAT personnel.

Takata Airbag Recall		<b>Inflator and Module Returns Shipping Instructions</b>		06/20/2023
Please contact <a href="mailto:scfieldaction.14305@rxo.com">scfieldaction.14305@rxo.com</a> for documentation and to arrange pickup				
If retailers do not receive a response from an RXO logistics specialists within 48 to 72 hours, then they can utilize the escalation number, (210) 317-6436 for further assistance.				
<b>1. Shipping Documents</b> a) Pallet Label <ul style="list-style-type: none"><li>To be emailed by RXO</li><li>To be affixed to each Pallet</li></ul> <div style="border: 2px solid red; padding: 10px; text-align: center;"><b>TK SERVICES</b> 1199 AUSTIN COURT HOWELL, MI 48843</div> b) Over-pack Label <ul style="list-style-type: none"><li>To be emailed by RXO</li><li>To be affixed to the outside of each pallet</li></ul> c) Bill of Lading <ul style="list-style-type: none"><li>To be emailed by RXO.</li><li>Print 2 copies: 1 for Dealer Records, 1 for Driver.</li></ul> d) ERG Document <ul style="list-style-type: none"><li>To be emailed by RXO.</li><li>To be provide by the Dealer to the Driver for each shipment</li></ul>		  		
<b>2. Packing Instructions</b> <b>**DO NOT DEPLOY THE INFLATOR**</b> a) Confirm box is in acceptable condition. Box should be in good condition with no visible signs of damage and should be capable of withstanding additional transportation. b) If a new box is needed, follow the New Box Instructions located in section #8 of this page. c) Place the un-deployed air bag inflator or module in the "cradle" of the box insert. <div style="display: flex; justify-content: space-around;"><div><b>Inflator</b> </div><div><b>Module</b> </div></div>		<b>5. Shipping Instructions – Prepare the Pallet</b> a) Accumulate and palletize Kits b) Arrange Kits on Pallet as pictured here <ul style="list-style-type: none"><li>20 boxes per row/layer (5x4)</li><li>10 rows/layers per pallet (200 boxes)</li></ul> c) Shrink-wrap Kits to Pallet d) Affix Over-pack Label and Pallet Label on (1) side of Pallet (Not on Top) e) If 200 boxes are not accumulated every 2 weeks, please proceed to step 6. Note: If you receive non-uniform sized kits (Older version), Please contact RXO via the instructions in Box 6 for additional Instructions <div style="display: flex; align-items: center; justify-content: space-around;"><div style="border: 2px solid red; padding: 10px; text-align: center;"><b>TK SERVICES</b> 1199 AUSTIN COURT HOWELL, MI 48843</div></div>		
<b>3. Closure Instructions</b> a) Close the top box flap, per box closure instructions located on front panel of box using a 2" wide by 4" long piece of tape to securely Close the box.  		<b>6. Shipping Instructions – Schedule Pickup</b> a) Upon Accumulating 200 kits (1 Over-pack/Pallet) Minimum <ul style="list-style-type: none"><li>Contact RXO at the e-mail noted above. If 200 Kits have not been accumulated every 2 weeks, please contact RXO for direction.</li><li>Complete shipping template and attach to E-Mail.</li></ul> b) Have the following Information Available <ul style="list-style-type: none"><li>Dealer #</li><li>Quantity of Over-packs/Pallets</li><li>Quantity of Driver Kits and Quantity of Passenger Kits on each Pallet</li><li>Email Address where shipping Documentation can be received</li><li>Lift gate Service Needed?</li></ul>		
<b>4. Shipping Instructions - Label each Box</b> <div style="display: flex; justify-content: space-around;"><div style="border: 1px solid blue; padding: 5px; text-align: center;">1 OEM module/inflator kit contains this 2-part label</div><div style="border: 1px solid blue; padding: 5px; text-align: center;">2 Peel off 'Ship-To' label</div><div style="border: 1px solid blue; padding: 5px; text-align: center;">3 Affix label to box. Do not cover up Class 9 Marking</div></div> 		<b>7. Shipping Instructions – Ship</b> a) Give 1 Copy of BOL and 1 Copy of ERG to Driver b) Retain 1 Copy of BOL for Dealership records and archive for at least 2 Years		
<b>8. Requesting a New Box / Shipping Labels</b> If a new box or replacement box shipping labels are needed, please contact a representative by email to request replacement materials. Primary Contact: E-Mail: <a href="mailto:scfieldaction.14305@rxo.com">scfieldaction.14305@rxo.com</a> To help expedite your request, please be prepared to provide the following information: a) Serial number on the original box (If replacement box is needed) b) What Type of shipping material needed <ul style="list-style-type: none"><li>Replacement Box</li><li>Two Part Return Label</li><li>Bill of Lading</li><li>ERG Form</li></ul> c) Dealer Shipping Information <ul style="list-style-type: none"><li>Contact Name</li><li>Dealer Address</li><li>Phone Number</li></ul> 				
<b>NOTE:</b> International and ALL Locations outside of the Continental United States (APAC, EMEA, Mexico, Hawaii, Alaska, Puerto Rico, and US Virgin Islands dealers) <b>CANNOT</b> follow above shipping instructions. Instead, dealerships in these locations <b>MUST</b> contact TK services /RXO USA representative directly for shipping instructions: RXO Representative .Email: <a href="mailto:scfieldaction.14305@rxo.com">scfieldaction.14305@rxo.com</a> Continental US 48 State Dealerships, please follow steps 1-8 above.				



## BOOKING TEMPLATE FOR TAKATA AIRBAG RECALL RETURNS

<b><u>PALLET (S) MUST BE READY BEFORE SENDING IN THE TEMPLATE. ALL FIELDS PERTAINING TO YOUR LOAD MUST BE FILLED IN AND SENT TO SCFIELDACTION.14305@RXO.COM.</u></b> <b><u>ESCALATION PHONE NUMBER : 210-317-6436</u></b> <b><u>TEMPLATE MUST BE USED FOR ALL BOOKING REQUESTS.</u></b>					
Dealer Code					
Dealer Name					
Pickup Address					
City, State & Zip					
YOUR Name & Phone#(DO NOT GIVE YOUR CELL #)					
Hours available for pickup					
Email Address for BOL					
Do you need a truck with lift gate and pallet jack ( YES or NO)					
SPECIAL EQPT NEEDS OR SPECIFIC CARRIER REQUEST					
	Pallet #1	Pallet #2	Pallet #3	Pallet #4	Pallet #5
Driver Side Count					
Passenger Side Count					
<b>TOTAL</b>	0	0	0	0	0
	Pallet #6	Pallet #7	Pallet #8	Pallet #9	Pallet #10
Driver Side Count					
Passenger Side Count					
<b>TOTAL</b>	0	0	0	0	0
	Pallet #11	Pallet #12	Pallet #13	total boxes	
Driver Side Count				0	
Passenger Side Count				0	
<b>TOTAL</b>	0	0	0	0	
<b>TRUCK LOAD IS 14 + PALLETS</b>	<b>USE THIS SECTION FOR 14 PALLETS OR MORE</b>				
TOTAL PALLET COUNT					
TOTAL DRIVER COUNT					
TOTAL PASSENGER COUNT					
TOTAL WEIGHT					



**PALLET (S) MUST BE READY BEFORE SENDING IN THE TEMPLATE. ALL FIELDS PERTAINING TO YOUR LOAD MUST BE FILLED IN AND SENT TO SCFIELDACTION.14305@RXO.COM ESCALATION PHONE NUMBER 210-317-6436 MIGUEL PRIGAADA**

Dealer Code  Dealer or Business Name

Pickup Address  City, State & Zip

Physical Address (if different from pickup address)  City, State & Zip

YOUR Name & Phone #  Hours Available for Pickup

Days/hours pickup is not allowed   
(lunch hour if shut down)

Email address for BOL


Do you need a truck with lift gate and pallet jack? YES ☐ NO ☐

Where can the driver expect to find pallet on property? Please give clear directions

Special instructions or notes that will help driver locate pallet on site

	Pallet #1	Pallet #2	Pallet #3	Pallet #4	Pallet #5	Pallet #6	Pallet #7	Pallet #8	Pallet #9	Pallet #10	Pallet #11	Pallet #12	Pallet #13	Pallet #14	Total Boxes
Driver Side Count	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Passenger Side Count	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Total	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>

## PARTS INFORMATION

DESCRIPTION	PART NUMBER	QUANTITY
MODULE KIT – SUB (Includes cushion, harness, module mounting bolts, inflator securing nuts and two brackets.)	K8515-EH19E	1
INFLATOR-AIR BAG ASST (Inflator)	98561-7999E	1
<b>Shorting Pin</b> (Insulation Displacement Connector for 22-18 gauge wire) 	NAPA item # 784566  Grainger Item # 4YT50  or equivalent available from local auto supply	2

### HINT:

- Make sure to return the removed (old / non-deployed) inflator in the box that the new inflator came in.
- Follow the return instructions provided on pages 30-33.

## CLAIMS INFORMATION

**HINT:** Use Service COMM and the VIN to confirm the correct campaign ID number for a given vehicle. The correct number must appear on all communication and documentation of any nature dealing with this campaign.

Submit a "CM" line claim using the following claims coding:

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
R1622	Remove and replace front passenger air bag and inflator	R1622B	2.7 hrs.

OR

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
R1701	Remove and replace front passenger air bag and inflator	R17016	2.7 hrs.

OR

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
R1704	Remove and replace front passenger air bag and inflator	R1704B	2.7 hrs.

OR

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
R1706	Remove and replace front passenger air bag and inflator	R17067	2.7 hrs.

OR

CAMPAIGN ("CM") I.D.	DESCRIPTION	OP CODE	FRT
R1707	Remove and replace front passenger air bag and inflator	R1707J	2.7 hrs.

EXPENSE CODE	DESCRIPTION	MAXIMUM AMOUNT
041	<b>Shorting Pin</b> (Insulation Displacement Connector for 22-18 gauge wire)	\$0.50

## AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
March 14, 2017	ITB17-024	Original bulletin published
June 15, 2017	ITB17-024a	CLAIMS INFORMATION and page 1 revised
October 3, 2017	ITB17-024b	Changes made throughout
January 4, 2018	ITB17-024c	Changes made throughout
January 15, 2020	ITB17-024d	CLAIMS INFORMATION revised and Campaign ID #'s added
July 24, 2023	ITB17-024E	INTRODUCTION updated, NOTE references changed to HINT, Pages 30-33 added

