



# **SAFETY RECALL BULLETIN**

## **NHTSA RECALL 23V023**

**AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301**

**March 2023**

### **ATTENTION:**

Service Managers / Parts Managers.

### **SUBJECT:**

Autocar, LLC has determined that certain WXLL, WX and ACX (Xpeditor), ACTT (Xspotter) and ACMD (Xpert) vehicles equipped with a restricted parking brake valve vent line and a worn beyond serviceable limit park brake valve could result in a roll away condition.

### **SAFETY RECALL INFORMATION:**

This Recall Bulletin provides instructions regarding the removal of the parking brake valve vent line and associated fitting from the parking brake valve.

### **VEHICLES AFFECTED:**

There are 11353, 2008 - 2020 model year WXLL, WX, ACX (Xpeditor), ACTT (Xspotter) and ACMD (Xpert) chassis affected. The WXLL chassis were manufactured between March 12, 2007, and June 5, 2009, with non-sequential serial numbers in the range of 205511 through 209868. The WX chassis were manufactured between February 6, 2007, and October 30, 2009, with non-sequential serial numbers in the range of 205422 through 210109. The ACX chassis were manufactured between November 30, 2007, and March 10, 2020, with non-sequential serial numbers in the range of 206686 through 233162. The ACTT chassis were manufactured between January 12, 2009, and January 20, 2020, with non-sequential serial numbers in the range of 208644 through 232396. The ACMD chassis were manufactured between January 19, 2013, and February 8, 2016, with non-sequential serial numbers in the range of 215560 through 222135. To determine if a vehicle is affected by this Recall, log in to the Autocar Warranty Management System at [www.autocartruck.com](http://www.autocartruck.com)<<http://www.autocartruck.com>>. From the main menu, select "View Recalls/ Service Programs" and look for the Autocar Recall number above. A spreadsheet file will be accessible with the VIN list of affected vehicles. Alternatively, to determine if a single vehicle is affected, select "VIN Profile" from the main menu in the Autocar Warranty Management System. In the "Chassis Number" field, enter the last 6 of the VIN. Once the VIN profile is displayed, scroll down to the "Recall/Service Program Information" section to determine if the Recall is open.

**THERE ARE NO PARTS ASSOCIATED WITH THIS SAFETY RECALL**

**WORN AND OR LEAKING COMPONENTS ARE NOT COVERED BY THIS SAFETY RECALL.**

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023



March 2023

### SERVICE RESPONSIBILITY:

Service sites must perform this Recall on affected vehicles at no charge to the owner regardless of vehicle mileage, age, or ownership. If a vehicle affected by this Recall is taken into or is currently in your vehicle inventory, or at your center for service, you must perform this Recall before the vehicle is sold or released to the owner.

### CLAIMS FOR REIMBURSEMENT:

Submit a claim for reimbursement in accordance with Autocar's Warranty Administration Manual with the following claim coding information:

### ACX-WX-WXLL

#### CLAIM CODING INFORMATION:

| Labor Operation Code Number | Time Allowance SRT | Description        |
|-----------------------------|--------------------|--------------------|
| 56319-2-01                  | .50 HR             | Parking Brake Vent |

### ACMD

#### CLAIM CODING INFORMATION:

| Labor Operation Code Number | Time Allowance SRT | Description        |
|-----------------------------|--------------------|--------------------|
| 56319-2-02                  | .50 HR             | Parking Brake Vent |

### ACTT

#### CLAIM CODING INFORMATION:

| Labor Operation Code Number | Time Allowance SRT | Description        |
|-----------------------------|--------------------|--------------------|
| 13.35.1                     | .50 HR             | Parking Brake Vent |

**Note:** *If you have questions or concerns regarding this Recall Bulletin, please contact Autocar technical support at 888-218-3611*

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023



AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301

March 2023

### SAFETY NOTICES:



#### WARNING

Allow the vehicle's engine and cooling system to cool to ambient temperature before performing the repair procedure. A hot engine or cooling assembly may cause burns or other personal injury.



#### WARNING

Never rely on the hydraulic pressure to hold the cab in an open position. Always use the safety pin in the cab tilt lock tube to prevent serious personal injury or death.



#### WARNING

To prevent eye injury, always wear eye protection when performing vehicle maintenance, service or inspection.



#### WARNING

Before working on a vehicle, set the parking brake, place the transmission in neutral and block the wheels. Failure to do so can result in unexpected vehicle movement and can cause serious personal injury or death.

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023



March 2023

### Working on CNG/LNG Trucks

## SAFETY INSTRUCTIONS

If you store or dispense Compressed Natural Gas (CNG) or Liquefied Natural Gas (LNG), or if you work on CNG or LNG trucks, your location must be fully compliant with applicable codes, regulations and standards, including National Fire Protection Associate (NFPA) codes, Society of Automotive Engineers (SAE) standards, American National Standards Institute (ANSI) Natural Gas Vehicle (NGV) standards, the United States Code of Federal Regulations (CFR) and your state and local fire and other applicable codes (including, for example, the California Code of Regulations and the Texas Administrative Code).

Contact your local fire department for guidance and additional compliance information.

Technicians working on Autocar trucks with CNG or LNG engines must be trained in the proper repair of CNG and LNG trucks and engines and the safe storage and dispensing of CNG and LNG.

### Working on CNG Fuel Systems



## WARNING

CNG fuel systems include a high pressure (3600 psi) system for fuel storage and a low pressure system (125 psi) for consumption by the engine. Understanding the characteristics of CNG and how the fuel system works will prevent injury and damage to persons and property.

Attempting to operate or maintain any CNG fuel system without proper training is dangerous. Complete training and consult instructional bulletins from the CNG system suppliers, such as Agility Fuel Systems' Field Service Bulletin, *Safely Working on CNG Fuel Systems*.

### Welding and Hot Work Near CNG and LNG Trucks



## WARNING

Welding, grinding, and other "hot work" can be safely performed on or near a CNG or LNG vehicle, but certain precautions must be followed. Understand and perform the necessary precautions provided by the CNG system suppliers, such as Agility Fuel Systems' Field Service Bulletin, *Welding and Hot Work Precautions Near CNG and LNG Vehicles*.



# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023

AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301

March 2023

### CNG Cylinders



## WARNING

CNG fuel containers must meet Federal Motor Vehicle Safety Standard (FMVSS) 304 (Compressed Natural Gas Fuel Container Integrity) and/or ANSI/CSANGV2 (Basic Requirements for Compressed Natural Gas Vehicle Fuel Containers). Both standards specify a detailed visual examination every three years.

Truck owners are required to complete all necessary inspections, in accordance with the applicable standards and other resources, such as the Clean Vehicle Education Foundation and NGVAmerica's Compressed Natural Gas (CNG) Container Visual Inspection Advisory.

FMVSS 304 also requires that cylinders not be used after the end of life (EOL) date provided on the tank label. The EOL date is also displayed in the engine compartment and at the fueling connection of each truck. If there are any question as to proper decommissioning of a cylinder, contact the manufacturer, whose name and address is also required to be on the label.

### CNG Fuel Container Pressure Relief Devices (PRDs)



## WARNING

PRDs must be properly maintained and positioned for safe operation of a CNG fuel system. Missing vent caps can allow moisture into PRDs and vent lines, which can freeze and damage these safety components. Debris which clogs the PRDs and/or vent lines can prevent proper function.

PRDs must be positioned to vent upward, not outward, from a vehicle.

Ensure that every truck owner completes periodic inspections of the PRDs and vent lines and systems, in accordance with guidance provided by the system component suppliers.

### Alert First Responders to CNG and LNG



## DANGER

In the event of a fire or other emergency, alert first responders to the presence and location of CNG fuel systems, tanks and dispensers. Ensure that emergency personnel are aware of proper precautions, such as those provided in Agility's *First Responder Guide: CNG and LNG Vehicle Fuel Systems*.

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023



March 2023

### LOCKOUT/TAGOUT PROCEDURES:



## CAUTION

Before entering the vehicle or vehicle body, read and follow OSHA regulations concerning entry and working in “CONFINED SPACE” OSHA 1910.146 and “LOCKOUT/TAGOUT” OSHA 1910.147. Follow OSHA regulations while performing any work on the vehicle. The vehicle must be disabled by the following steps before performing any work on the vehicle:

1. Place the transmission in NEUTRAL.
2. Set the parking brake.
3. Shut the engine OFF.
4. Lock cab doors, keep the key in your pocket. Block the wheels before entering the body or performing any work on the vehicle.
5. Turn the battery disconnect switch OFF, if equipped.
6. Completely drain the air from the primary/A system and secondary/B system by opening the drain valves on the air tanks themselves or by using the drain manifold if supplied. When draining the air tanks, do not look into the area where air is draining. Dirt or sludge particles may be expelled in the air stream and can cause eye injury.
7. Place magnetic “DANGER” signs on both cab doors before entering the body or performing any work on the vehicle.
8. Take proper precautions before working under the vehicle. Use ramps approved for the weight of your vehicle, or use floor jacks and stands. Never work under a vehicle supported by jacks alone. Always use jack stands to support the vehicle.

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023

AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301

March 2023

### PARKING BRAKE VENT LINE REMOVAL

- Step 1. Follow all lockout/tagout procedures and verify the battery disconnect switch is in the “OFF” position. If the unit is not equipped with a battery disconnect switch, disconnect the battery cables beginning with the negative cables, followed by the positive cables.
- Step 2. Unlock and open the cab door(s).
- Step 3. Locate the parking brake valve (See Figure 1).



Figure 1

**Note:** *Due to design variations the dash illustrations are for reference only and may differ from your specific application.*


# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023




March 2023

Step 4A. **ACX Xpeditor Right Drive Vehicles:** To gain access to the parking brake valve, remove 6 screws along with the cover plate and set aside for reinstallation (See Figure 2).

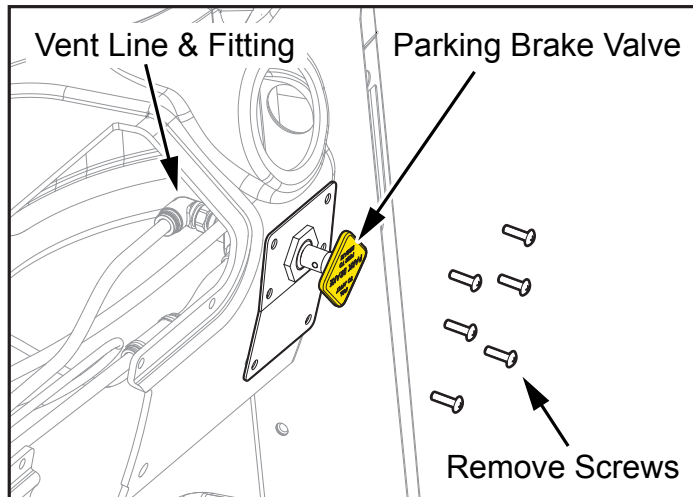

**Figure 2**

Step 4B. **ACX Xpeditor Left Drive Vehicles:** To gain access to the parking brake valve, remove 6 screws along with the instrument panel and set aside for reinstallation (See Figures 3 and 4).

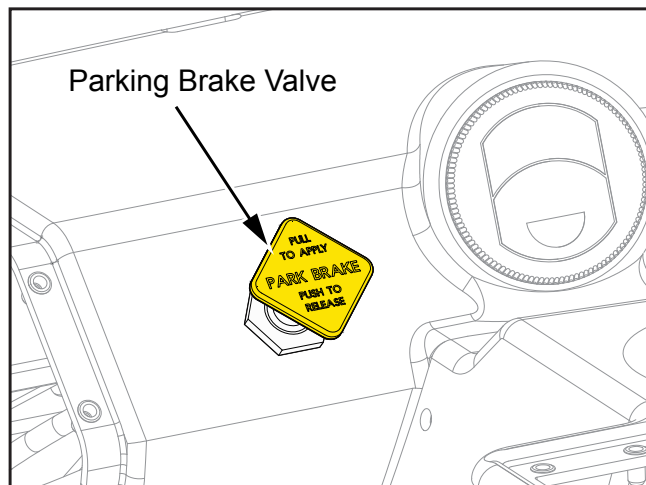

**Figure 3**




# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023




AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301

March 2023

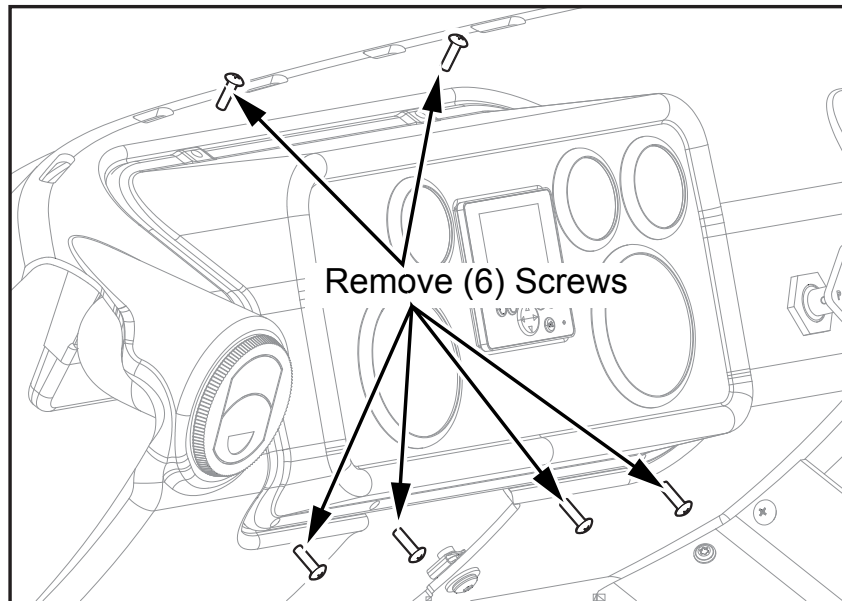

**Figure 4**

Step 4C. **ACX Xpeditor Center Mount Vehicles:** To gain access to the parking brake valve, remove 4 screws along with the cover plate and set aside for reinstallation (See Figure 5).

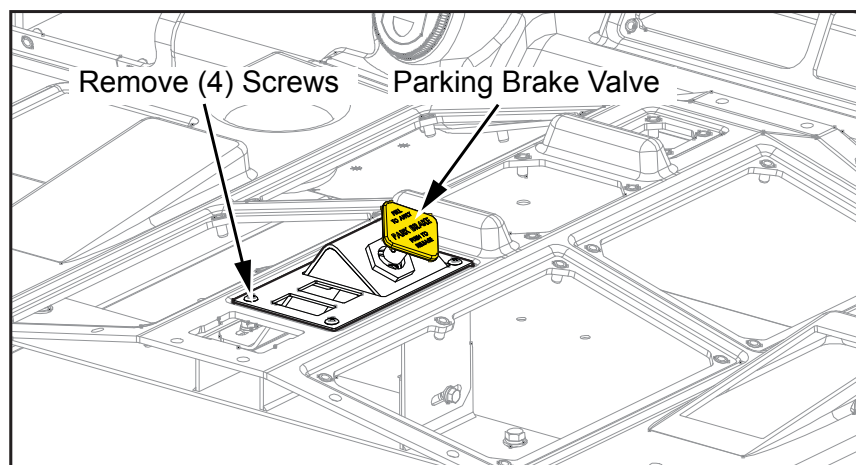

**Figure 5**

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023

AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301



March 2023

Step 4D. **ACTT Xspotter Vehicles:** To gain access to the parking brake valve, remove 6 or 4 screws along with the cover plate and set aside for reinstallation (See Figures 6 and 7).

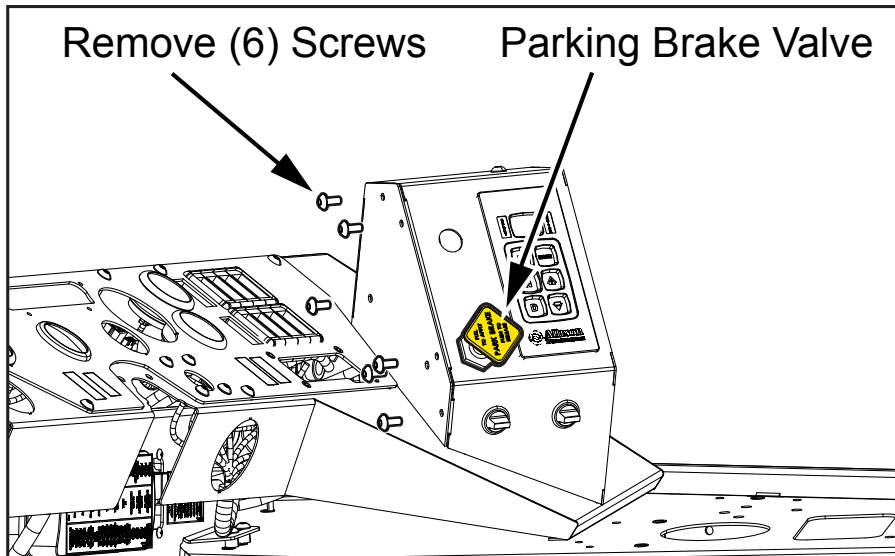


Figure 6

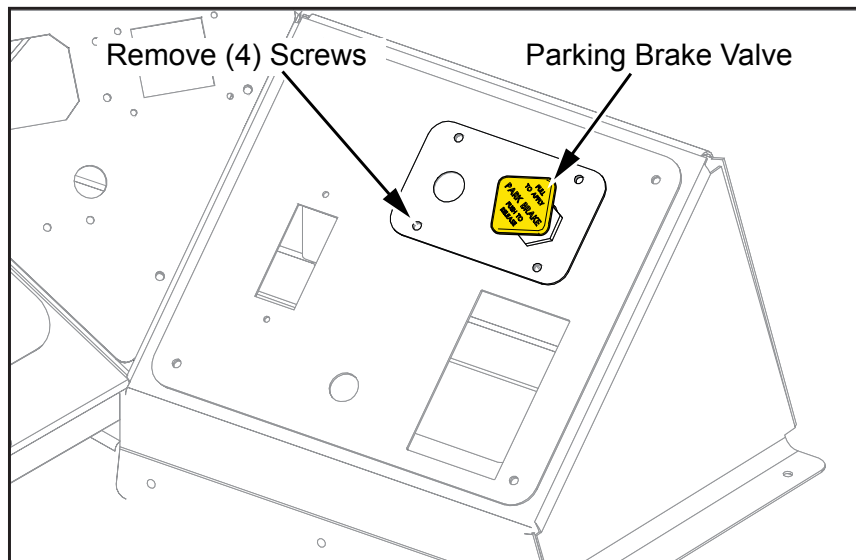


Figure 7

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023

AUTOCAR, LLC SAFETY RECALL ACX-2303, ACTT-2301, ACMD-2301

March 2023

Step 4E. **ACMD Xpert Vehicles:** To gain access to the parking brake valve, remove 3 screws along with the instrument panel and set aside for reinstallation (See Figure 8).

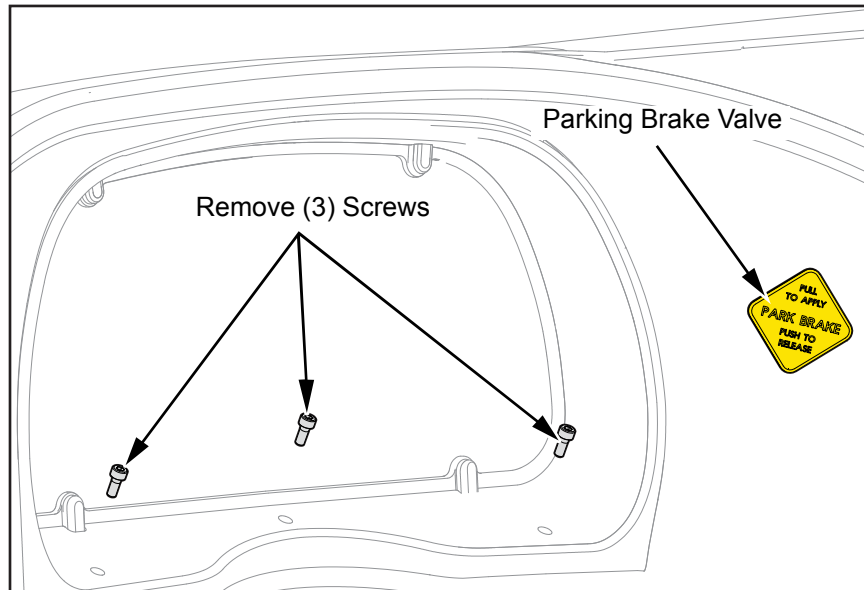


Figure 8

Step 5. After gaining access to the parking brake valve, remove and discard the vent line and associated fitting from the control valve (See Figure 9).

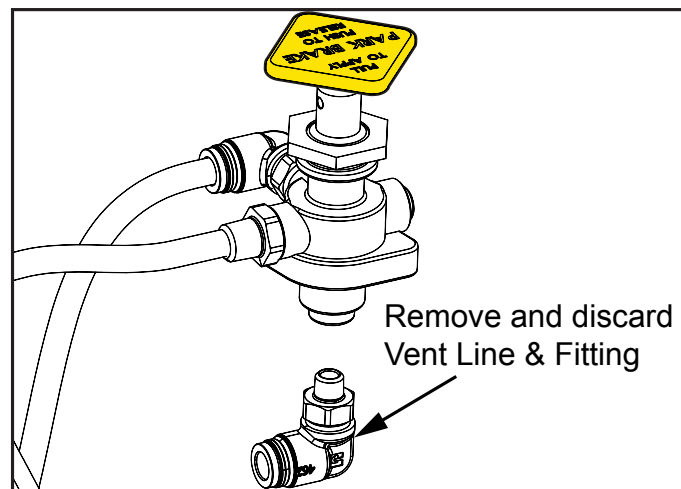


Figure 9

# SAFETY RECALL BULLETIN

## NHTSA RECALL 23V023



March 2023

- Step 6. Reinstall the parking brake valve along with the screws and panels that were set aside in Step 4.
- Step 7. Turn the battery disconnect switch to the "ON" position or reconnect the battery cables beginning with the positive cables followed by the negative cables.
- Step 8. Repairs are complete.

***Note: If you have questions or concerns regarding this Safety Recall, please contact Autocar technical support at 888-218-3611.***