	The second s			
CAUTION: A full load of water equals 177 Kg/390 Lbs of cargo @ 1 Kg/L (8.3 lb/gal) The weight of the cargo should never exceed 308 Kg or 678 Lbs.				RECREATION VEHICLE TRAILER CARGO CARRYING CAPACITY VIN: 5SFPB1917ME456898 DRYWEIGHT: 1894 Kg or 4176 Lbs. CAUTION: A full load of water equals 177 Kg/390 Lbs of cargo @ 1 Kg/L (8.3 lb/gal) The weight of the cargo should never exceed 308 Kg or 678 Lbs.
TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRE PRESSION DES PNE	SEE OWNER'S	
FRONT	ST225/75/R15 D	448 KPA/65	MANUALFUR	MANUFACTURED BY/FABRIQUE PAR: HEARTLAND RECREATIONAL VEHICLÉS DATE 2021-03-01
REAR ARRÈRE	ST225/75/R15 D 448 KPA/65 PSI		DE L'USAGER	GVWR/PNBV 2209 Kg 4870 Lbs
SPARE DE SECOURS	ST225/75/R15 D	448 KPA/65	PSI POUR PLUS DE RENSEIGNEMENTS	GAWR (EACH AXLE)/PNB (CHAQUE ESSIEU) 1996 Kg 4400 Lbs
CARGO CARRYING CAPACITY: 131 Kg/288 Lbs MAS CALCULATED WITH THE FRESH WATER TANKS FULL (COLD 154 Kg/ 340 Lbs HOT 23 Kg/ 50 Lbs) AND THE WASTE WATER TANKS EMPTY CAPACITE DE CHARGEMENT: 131 Kg/288 Lbs MAS			MASS OF WASTE WATER WHEN TANKS ARE FULL: 483 Kg 664 Lbs MASSE DES RESERVOIRS D'EAUX USEES PLEINS: 483 Kg 664 Lbs	TIRES/PNEU ST225/75/R15.D RIMJANTE 1530 Kg TIRES/PNEU ST225/75/R15.D RIMJANTE 154 GJ COLD INFL. PRESS./PRESS. DE GONFL. A FROID 448 KPA (65 PS//LPC) THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON DATE OF MANUFACTURE CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICLES AUTOMOBLES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION V.I.N.I.V. SSFPB1917ME456988 V.I.N.I.V. SS171 Pioneer
Section 1 – Capacity				Section 3- Cargo capacities
Section 2- Tire information				Section 4 – Federal ID

The V.I.N. tag is broken into four sections. You will need to replace all four sections.

IMPORTANT: DO NOT APPLY NEW LABELS OVER THE EXISTING LABELS.

- Locate sections 1, 2 and 4 on the driver's side of your unit, typically just above the baggage door. Remove sections 1, 2 and 4 from your sidewall using a plastic scraping tool being careful not to scratch your unit. You may use isopropanol alcohol to assist with adhesion removal if needed.
- 2. Locate sections 1, 2 and 4 in the new set you received in the mail, remove from backer and carefully place on side wall in the order you removed them.
- 3. Locate section 3 in the door jamb closest to the hinge of the entrance door. Remove section 3 from your door jamb using a plastic scraping tool, being careful not to scratch your unit. You may use isopropanol alcohol to assist with adhesion removal.
- 4. Remove section 3 from the backer and place on the inside of the door jamb.




Section 3 – Cargo capacities applied to the inside of the door jamb.



Section 4 – Federal ID Section 2⁻ Tire information

Section 1 – Capacity

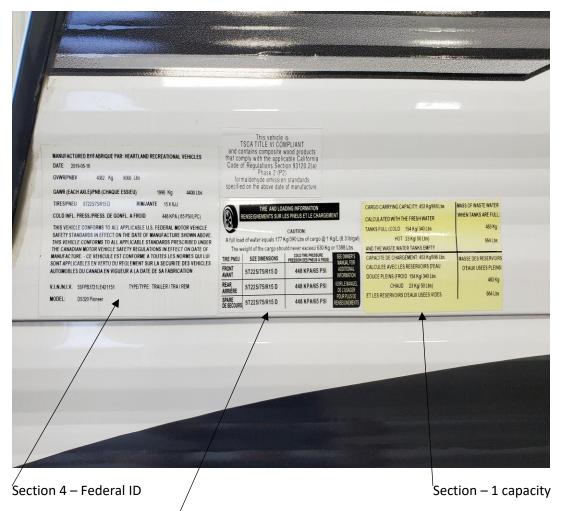

Section 2 – Tire information