

Overlay Tire Placard Owner Instructions

1. Open the driver's front door and locate the existing tire placard label positioned along the B-pillar.

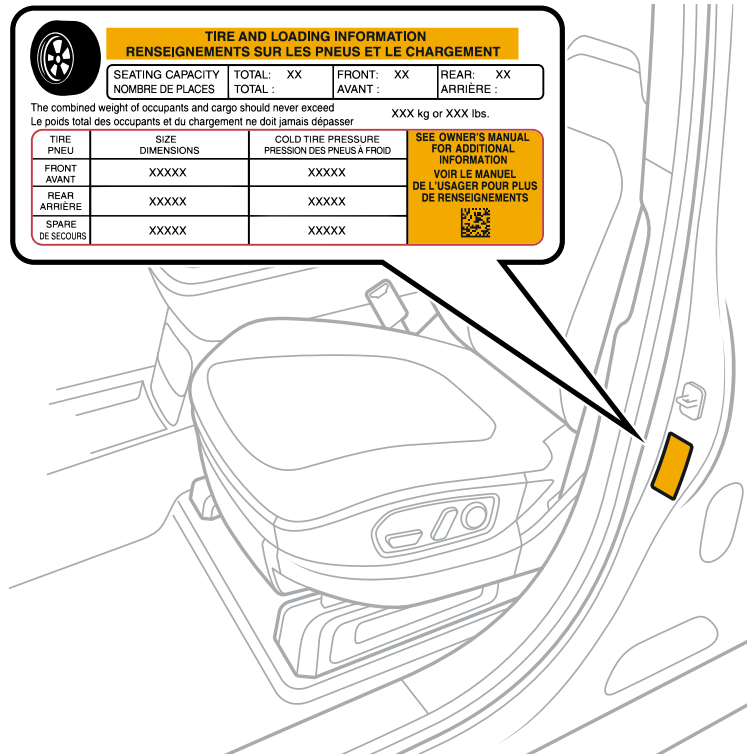


Figure 1

2. By comparing the existing and NEW labels, verify the vehicle equipped content is accurate. The only change will be the listed combined weight (See arrow in Figure 2).

If you believe you received an incorrect overlay label, do not apply the new label. Contact your nearest service center for further assistance.

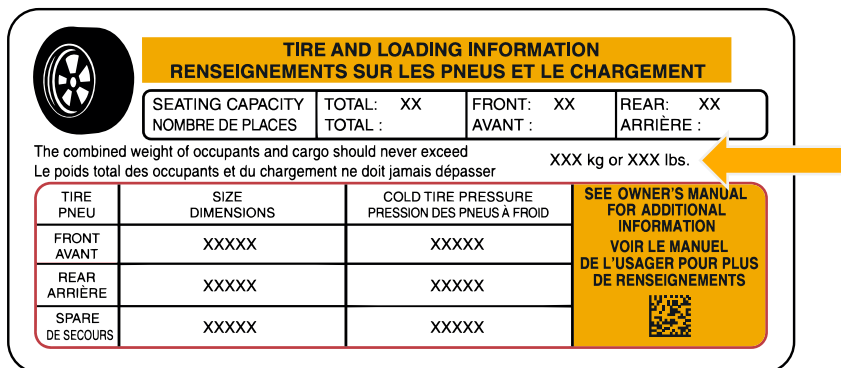


Figure 2

3. Using isopropyl alcohol or window cleaning solution, clean the existing label of any dirt or debris and wipe dry with a clean cloth.
4. Allow the desired cleaning agent to dry before applying the NEW overlay label.
5. Remove the paper backing from the NEW overlay label. Carefully align the label directly on top of the existing tire placard and apply. Press firmly across the entire label to ensure proper adhesion.

NOTE: Removing or attempting to reposition the label after application will damage the label.