SOP15910

Federal Compliance Decal CD-229

CA#10616

Department: 32
People Required: 1
Time to Complete: 0.20 hours
Date Created: Oct. 8/24
Date Revised: **Rev #:**
Created by Initial: BH **Verified: DH**

Parts/tools required:

1. Federal Certification decal (**specific to VIN**).
2. Solvent, such as Mineral Spirits (to clean residue).
3. Cleaner, such as Methanol (to prep surface).

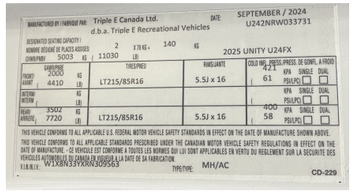

1

Locate Federal Certification decal on the drivers side B-pillar.

2

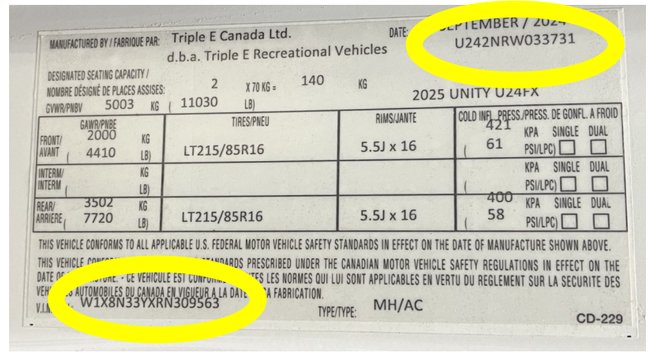

Confirm that the VIN and the unit run number match the one being replaced.

3

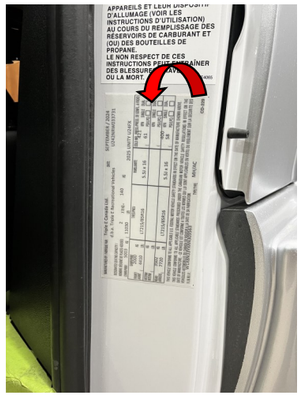

Remove the incorrect decal.

4

After the decal is removed, there will be “VOID” lettering that will need to be removed from the B-pillar using solvent.

5

After the residue has been removed, use Methanol to prep surface for the new decal.

6

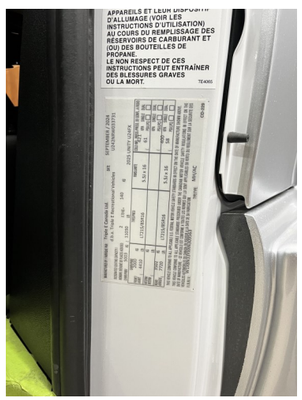

Apply new decal in the same location.

Take care to align properly the first time, as **the decal CANNOT be pulled off to reposition**, or it will be once again void.

7

Be sure to discard the old decal.

8

9