

June 6, 2025

Version 1

Safety Recall: 2025 CR-V AWD Sport Touring Hybrid Replace Fuel Feed Hose

APPLIES TO

Year	Model	Trim Level	VIN Range
2025	CR-V Hybrid (AWD)	Sport Touring	Check iN for VIN status eligibility.

BACKGROUND

Due to an improperly installed fuel feed hose assembly, fuel can potentially leak. A fuel leak can increase the risk of a fire.

CUSTOMER NOTIFICATION

Owners of affected vehicles will be sent a notification of this safety recall. Do an iN VIN status inquiry to verify eligibility.

Some vehicles affected by this campaign may be in your new or used vehicle inventory.

Failure to repair a vehicle subject to a recall or campaign may subject your dealership to claims or lawsuits from the customer or anyone else harmed as a result of such failure. To see if a vehicle in inventory is affected by this safety recall, do a VIN status inquiry before selling it.

CORRECTIVE ACTION

Replace the fuel feed hose.

WARRANTY CLAIM INFORMATION

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
3101ES	Replace fuel feed hose (includes DTC check/clear and steering angle learn)	0.6hr	6UF00	TLS00	A25059A	16722-69F-A01

CUSTOMER INFORMATION: The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by "do-it-yourselfers," and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Honda automobile dealer.

PARTS INFORMATION

NOTE: Due to the limited number of vehicles effected by this recall, parts are VIN controlled and can be ordered via the controlled order screen.

Part Name	Part Number	Quantity
Hose, Fuel Feed	16722-69F-A01	1
Holder B, Fuel Connector Cover	16726-RYE-A01	2

REQUIRED MATERIALS

None

TOOL INFORMATION

Tool Name	Part Number	Quantity
Relay Puller	07AAC-000A2A1	1

REPAIR PROCEDURE


WARNING

Leaking fuel can ignite, causing a fire or explosion. This can cause serious injury or death. Always work in a well-ventilated area and keep sparks or open flames away.

NOTE: Due to the limited number of vehicles affected, check the iN VIN status eligibility prior to starting this Service Bulletin.

1. [Relieve Fuel Pressure.](#)
2. [Disconnect the negative 12 Volt Battery Terminal.](#)
3. Remove the Fuel Feed Hose Cover A.

NOTE: Make sure to remove the lower nut first, followed by the upper nut.

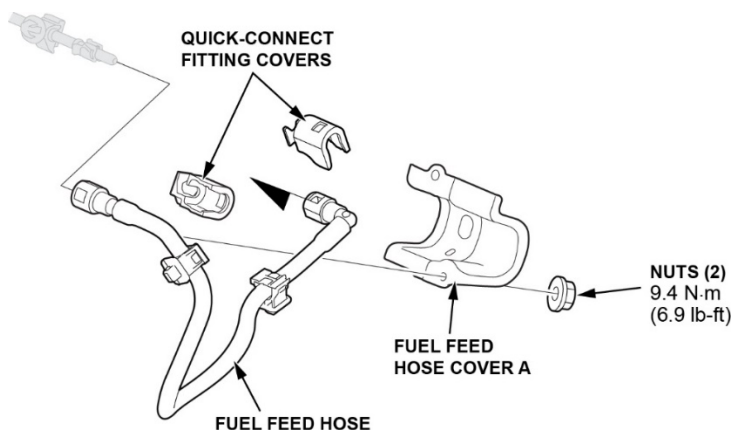

4. Remove quick-connect fitting covers.
5. Disconnect fuel feed pipe retaining clips.
6. Disconnect the quick-connect fittings on each end. Then, remove the fuel feed hose.
7. Install the new fuel feed hose with new quick-connect fitting covers.

NOTE: During install make sure you install the new ones.

8. Install all removed parts in reverse order of removal.
9. Check for fuel leaks. [FUEL LINE INSPECTION](#)
10. Install fuel feed hose cover A.
11. Do the ALL DTC Check and Clear.
12. Complete the [STEERING ANGLE NEUTRAL POSITION LEARNING](#).