

May 22, 2026

Version 1

Safety Recall: 2017–22 CR-V, 2020–22 CR-V Hybrid Seat Weight Sensor**APPLIES TO**

Year	Model	Trim Level	VIN Range
2017–22	CR-V	ALL	Check the iN-VIN status for eligibility.
2020–22	CR-V Hybrid	ALL	Check the iN-VIN status for eligibility.

BACKGROUND

Affected vehicles may be equipped with seat weight sensors that are not built to proper specifications. Improperly built sensors could lead to cracking and/or a short circuit of the sensor, resulting in the illumination of the SRS warning light and the passenger airbag indicator remaining OFF. In certain collisions, these seat weight sensors may cause improper deployment of the front passenger airbags, increasing the risk of injury.

CUSTOMER NOTIFICATION

Owners of affected vehicles will be sent a notification of this safety recall.

Do an iN VIN status inquiry to verify eligibility.

Some vehicles affected by this campaign may be in your new or used vehicle inventory.

Failure to repair a vehicle subject to a recall or campaign may subject your dealership to claims or lawsuits from the customer or anyone else harmed as a result of such failure. To see if a vehicle in inventory is affected by this safety recall, do a VIN status inquiry before selling it.

CORRECTIVE ACTION

Replace the seat weight sensors.

CUSTOMER INFORMATION: The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by “do-it-yourselfers,” and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Honda automobile dealer.

WARRANTY CLAIM INFORMATION

Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
7491E4	Replace seat weight sensor - power seat (includes seat calibration & DTC clear)	0.8 hr	6XW00	NOC00	A26075A	81201-TBA-A61
7491E5	Replace seat weight sensor - manual seat (includes seat calibration & DTC clear)	0.8 hr	6XW00	NOC00	A26075B	81126-TLA-C01

Skill Level: Repair Technician

Seat Weight Sensor Kit Serial Number

Enter the Seat Weight Sensor Kit serial number from the Seat Weight Sensor Kit label into the Replacement Serial Number field of the Parts Information section of the warranty claim.

NOTE:

- The Seat Weight Sensor Kit label should be affixed to the repair order by the technician.
- The claim may reject if a valid serial number is not included.

Parts Information						
Failed Part No. •		Failed Part Description •				
Replacement Serial No.						
Item	Replacement Part No. •	Quantity •	Unit Price	Unit Total	Description	
1						Delete
2						Delete
3						Delete
4						Delete
5						Delete
More >						
Materials Information						

PARTS INFORMATION

Part Name	Part Number	Quantity
Seat Weight Sensor Kit	04945-TBA-A00	1

Refer to the Parts Information Bulletin 24-0020, Multi-model Seat-Weight Sensor Safety Recall Parts Availability, for details regarding parts availability and ordering.

NOTE: Required tools were shipped as part of a previous campaign action. Replacement or additional tools are available through the Tool and Equipment Program.

Tool Name	Part Number	Quantity
Snap-on Torque Wrench	07AAA-TVAA400	1
Head, Box End (12mm)	07AAA-TVAA100	1
Head, Box End (14mm)	07AAA-TVAA200	1
Head, Box End (16mm)	07AAA-TG7A300	1
Fixture, SWS Guide A	07AAG-TVAA100	1


Manual Seat

NOTE: For Power Seat, see page 10.

1. Remove the label from the new seat weight sensor box and affix it to the repair order.


[illegible]

2. Remove the adjustable head restraint.
3. Remove the front passenger seat track covers (if applied) from the passenger seat rail.

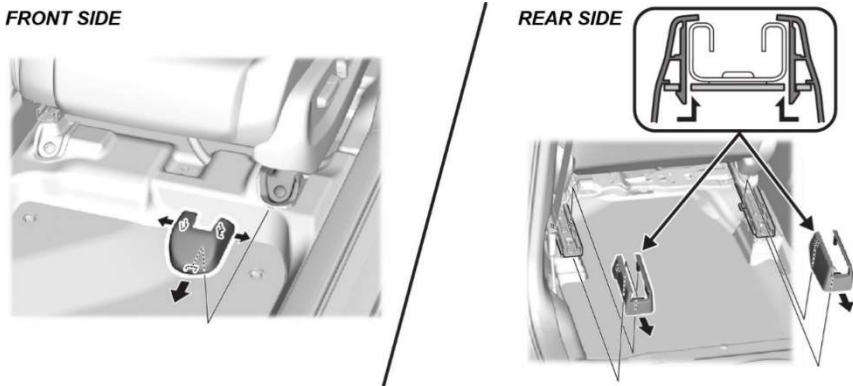

4. Slide the seat forward and remove the rear mounting bolts.


REAR SIDE

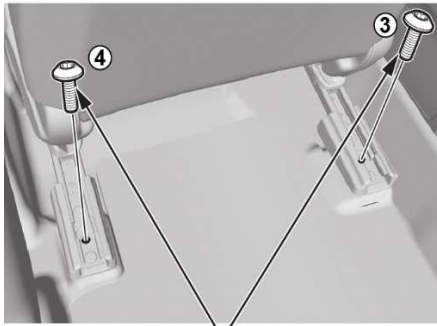

BOLTS
43 N·m
(32 lb-ft)


5. Slide the seat back and remove the front mounting bolts.

FRONT SIDE

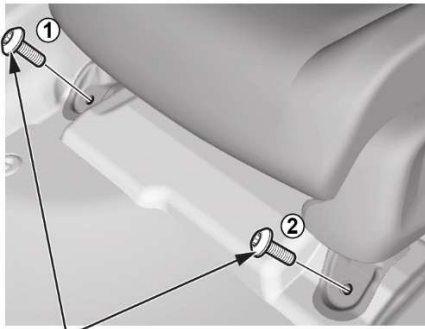


BOLTS
43 N·m
(32 lb-ft)

6. Disconnect the negative terminal of the 12-volt battery.
- CR-V ([Click Here](#))
 - CR-V Hybrid ([Click Here](#))
7. Tilt the front seat back, disconnect the connectors and detach the harness clip.

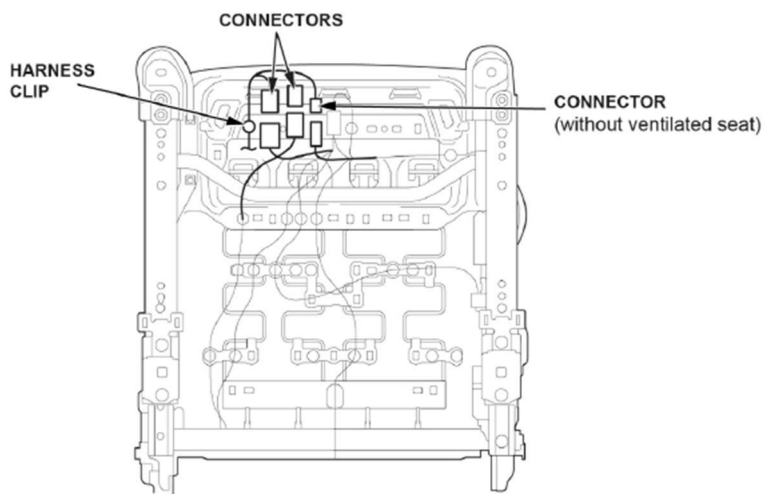


8. With the help of an assistant, carefully remove the passenger seat from the vehicle and place it on a clean, flat surface.


9. Remove the seat frame lever.

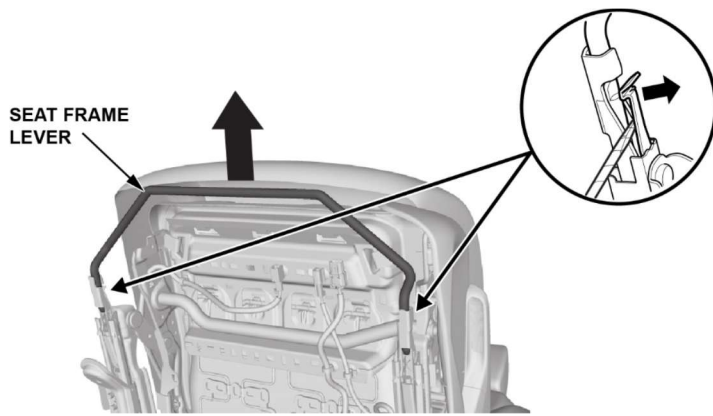

10. Mark the inner seat rail and seat frame for reference.

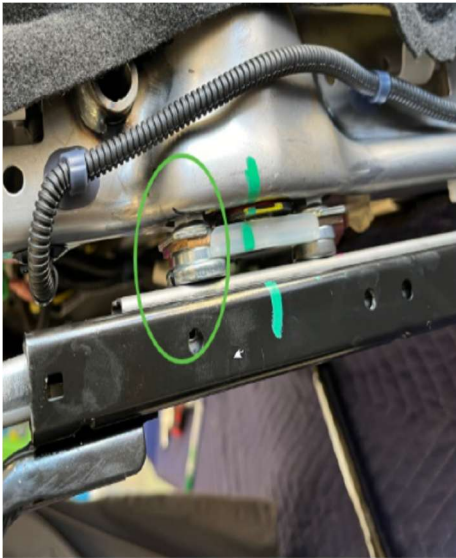


11. Remove the 2 nuts and 2 spacers that secure the inner seat rail to the seat. Save the colored bushing and collars to be reused. Discard the nuts and spacers.

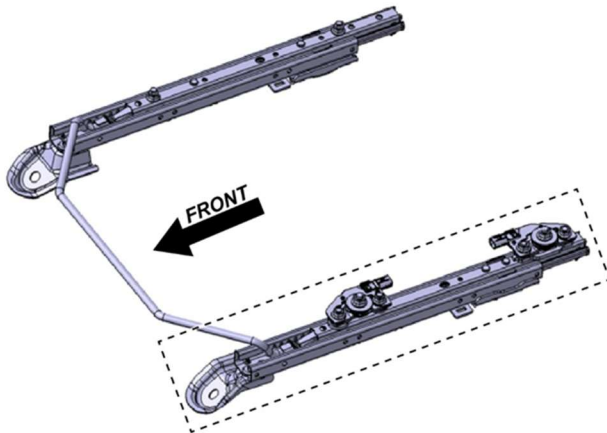


12. Install the inner seat rail into the vehicle using the seat rail mounting bolts. Tighten the bolts by hand first, then torque the bolts to the specified torque **43 N·m (32 lb-ft)**.

Remove the 4 nuts and the 2 seat weight sensors. Discard the nuts and sensors.

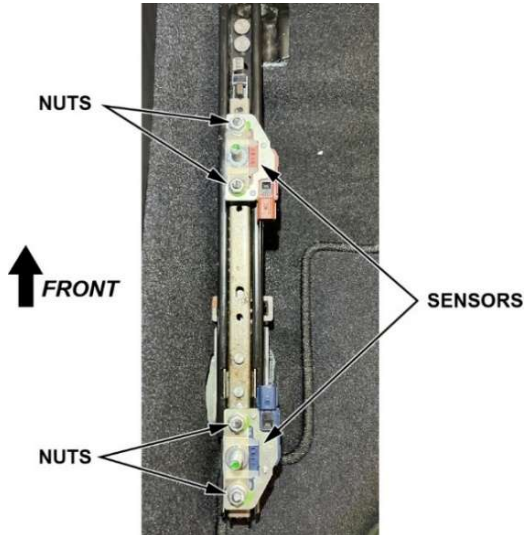

13. Loosely install the new sensors using new sensor nuts in the orientation shown.



NOTE: The new sensors have a number to install in the correct location.

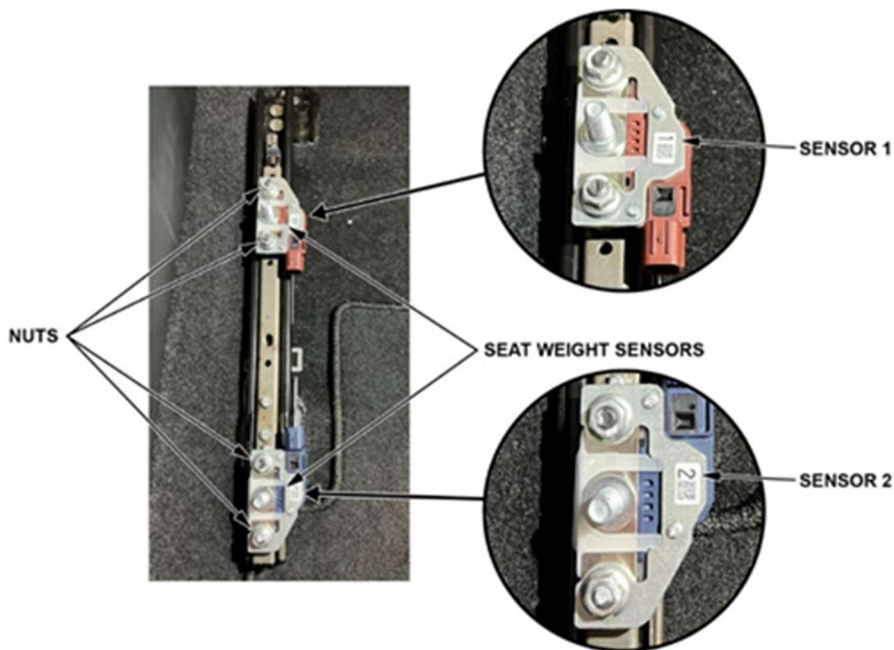

14. Place the **SWS Fixture Guide A** onto the new seat weight sensors with the tabs located to the inside of the seat rail.
With the guide properly seated on the sensor

15. **the order shown on the SWS Fixture Guide.**

NOTE: Use the socket provided with the guide.

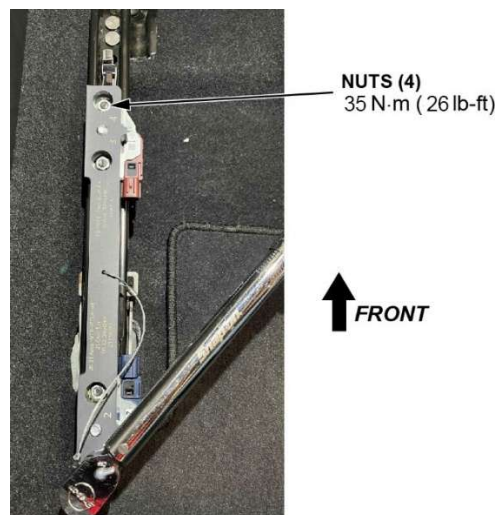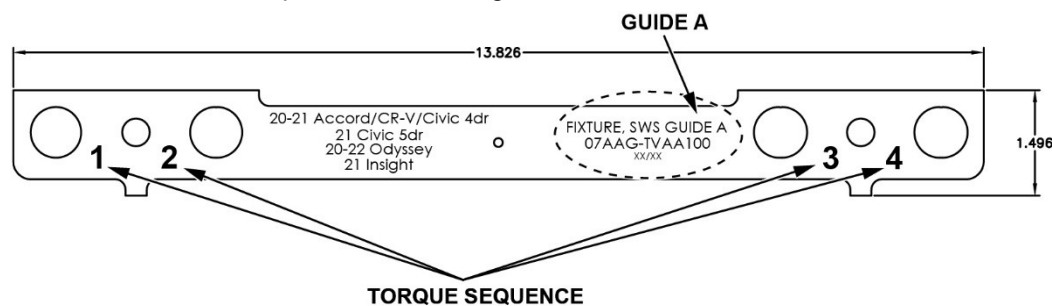


16. Remove the inner seat rail from the vehicle.


17. Reinstall the seat rail to the seat using new mounting nuts and spacers. Reuse the colored bushings and collars.

NOTE:

- Use the reference marks to align the seat rail and seat frame.
- The bushings and collars can be identified by their color.
- Make sure to install the bushing and collars as shown.

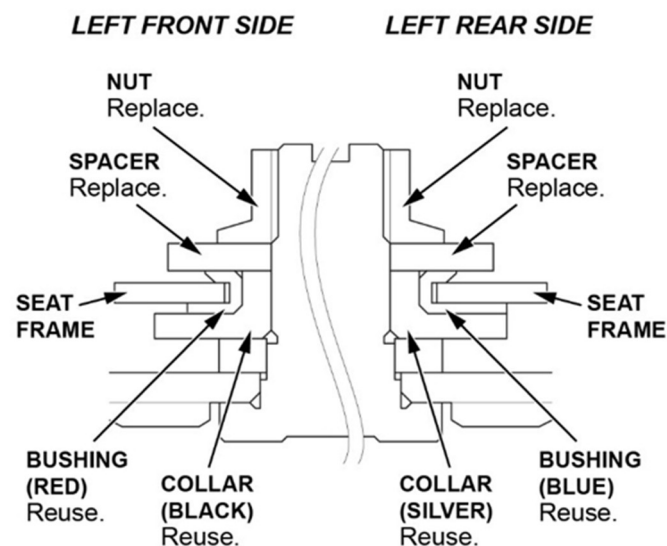

18. Use the Snap-On Torque Wrench (07AAA-TVAA400) and box-end head and torque the nuts to the specified torque **55 N·m (41 lb-ft)**.

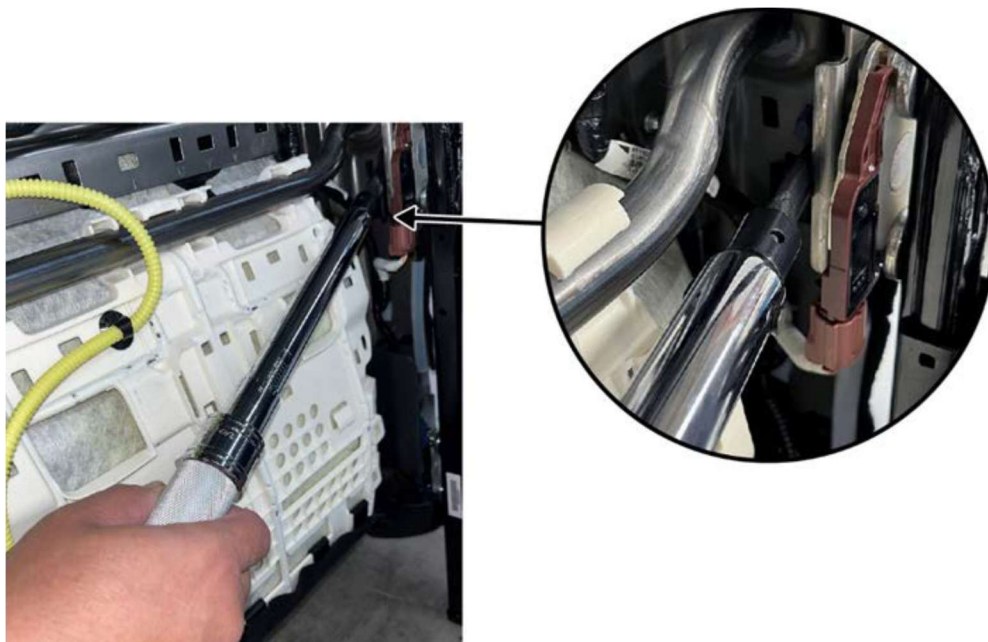

19. Reinstall the seat frame lever.
20. With the help of an assistant reinstall the seat in the vehicle.
21. Reconnect the seat connectors and secure the harness clip.
22. Install the seat rail mounting bolts to the passenger seat, tighten the bolts by hand first.


NOTE: Torque the bolts to the specified torque **43 N·m (32 lb-ft)** in the numbered sequence shown.

FRONT SIDE



BOLTS
43 N·m
(32 lb-ft)

REAR SIDE

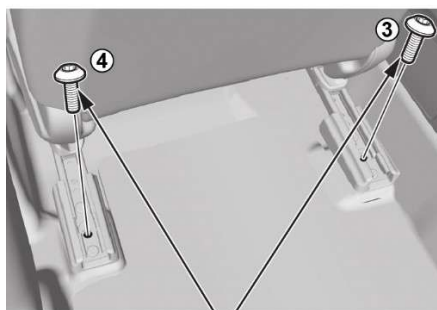


BOLTS
43 N·m
(32 lb-ft)

23. Connect the negative cable and the 12-volt battery sensor to the 12-volt battery.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click here](#))

NOTE: To protect the 12-volt battery sensor connector from damage, do not hold it when installing the negative terminal.

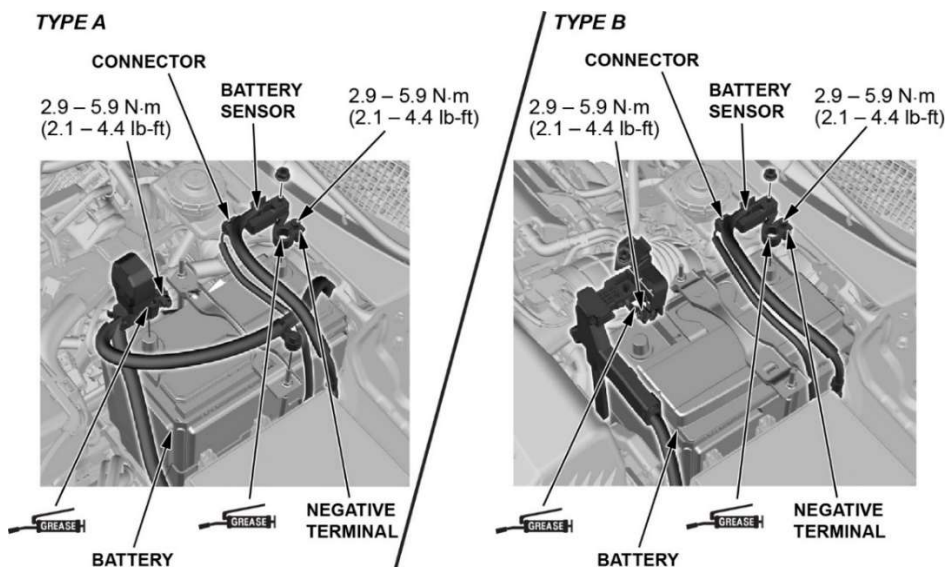

24. Do the seat weight sensor initialization.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))

25. Do the front weight sensor operation check.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))

26. Confirm SRS Operation: Turn the vehicle to the ON mode, check that the SRS indicator comes on for about **6 seconds** and then goes off.

27. Do the steering neutral position learn procedure using the method with the HDS.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))

1. Remove the label from the new seat weight sensor box and affix it to the repair order.





HONDA
Maintainers **HONDA**
1234 MAIN STREET
P.O. BOX 1234
800-555-1234

[illegible]


- FRONT SIDE**



REAR SIDE

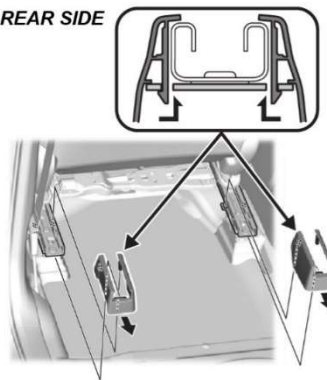


- REAR SIDE**

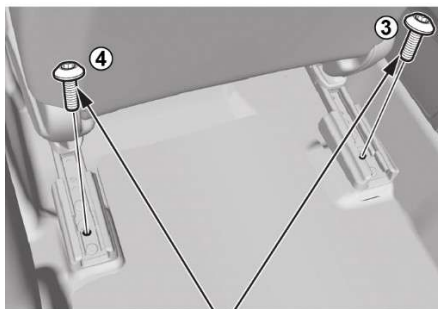

Page 10 of 16


5. Slide the seat back and remove the front mounting bolts.

FRONT SIDE

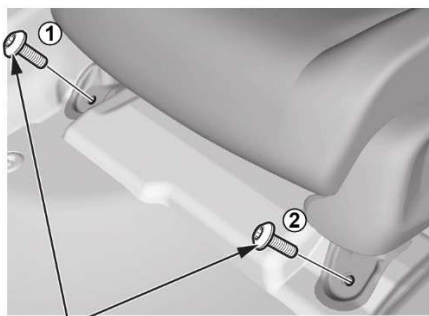


BOLTS
43 N·m
(32 lb-ft)


6. Disconnect the negative terminal of the 12-volt battery.
- CR-V ([Click Here](#))
 - CR-V Hybrid ([Click Here](#))
7. Lift up the front seat, disconnect the connectors and detach the harness clip.

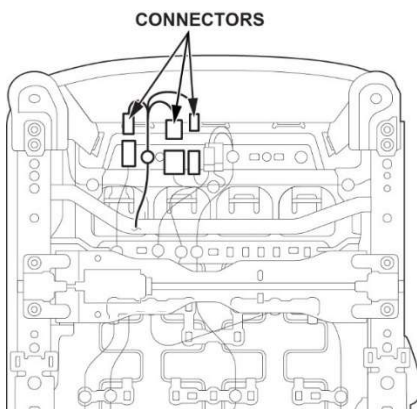

8. With the help of an assistant, carefully remove the passenger seat from the vehicle and place it on a clean, flat surface.
- NOTE: Use the rubber pads to support the front seat, take care not to damage the slide motor.

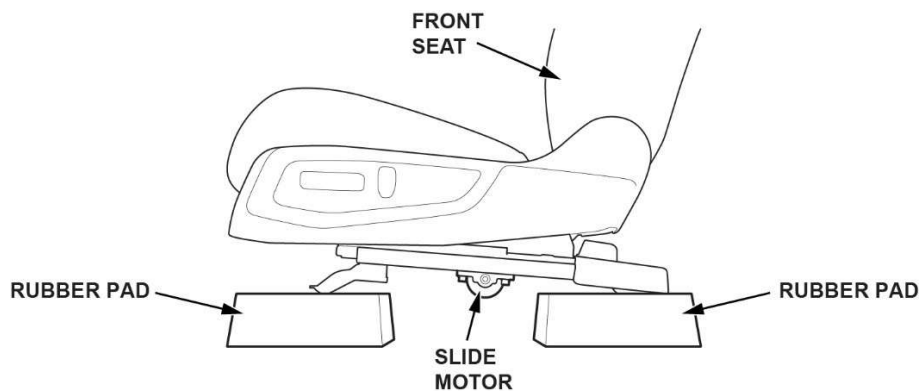


9. Mark the inner seat rail and seat frame for reference.

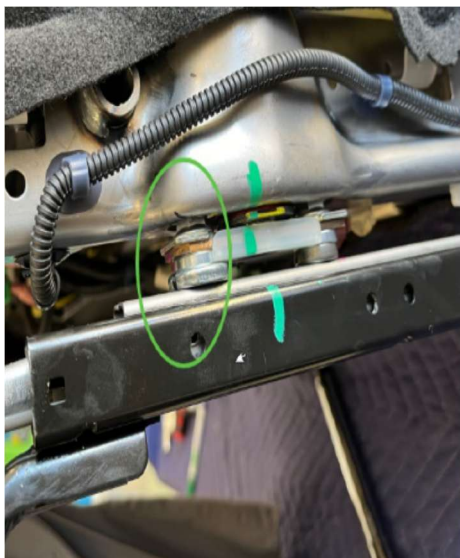

10. Take a photo of the harness arrangement underneath the seat for reference, before disconnecting any of the remaining connectors or harness clips.




11. Remove the 4 nuts and spacers attaching the seat rail assembly to the seat frame. Remove the seat rail as an assembly. Discard the nuts and spacers.

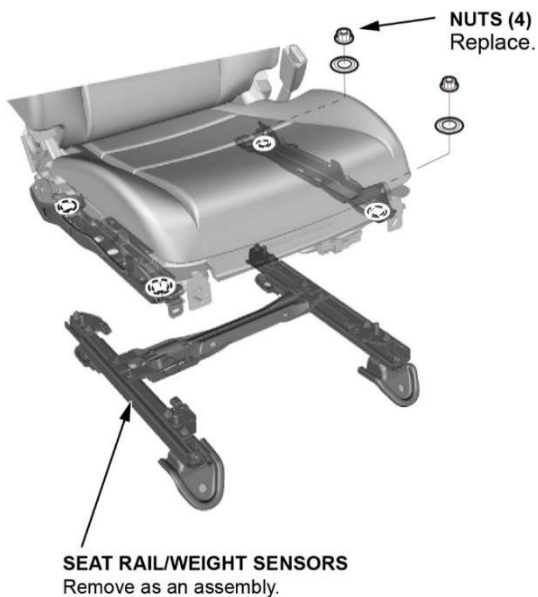

12. Reinstall the seat rail assembly in the vehicle using the seat rail mounting bolts. Tighten the bolts by hand first, then torque the bolts to **43 N·m (32 lb-ft)**.


Remove the 4 sensor nuts and 2 seat weight sensors. Discard the nuts and sensors.

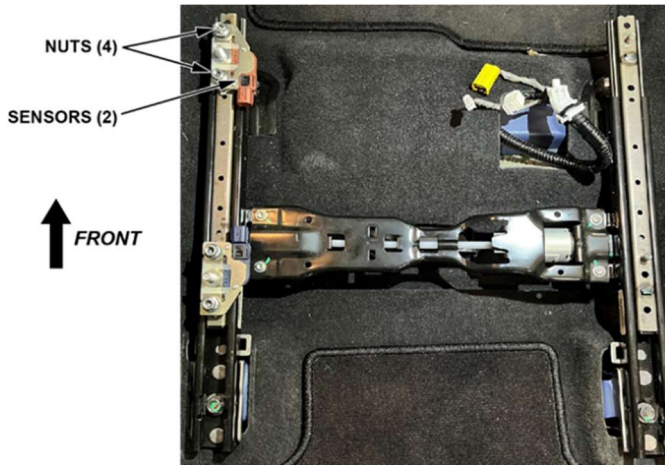

13. Loosely install the new sensors using new sensor nuts in the orientation shown.



NOTE: The new sensors have a number to install in the correct location.

**SENSOR POSITION 1
LEFT FRONT**

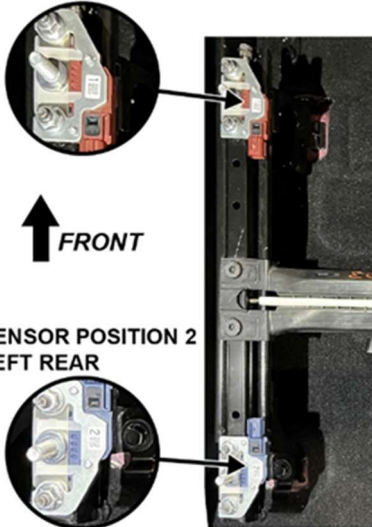

14. Place the **SWS Fixture Guide A** onto the new seat weight sensors with the tabs located to the inside of the seat track. With the guide properly seated on the sensors, **torque the nuts to 35 N·m (26 lb-ft) in the order shown on the SWS Fixture Guide**.


NOTE: Use the socket provided with the guide.

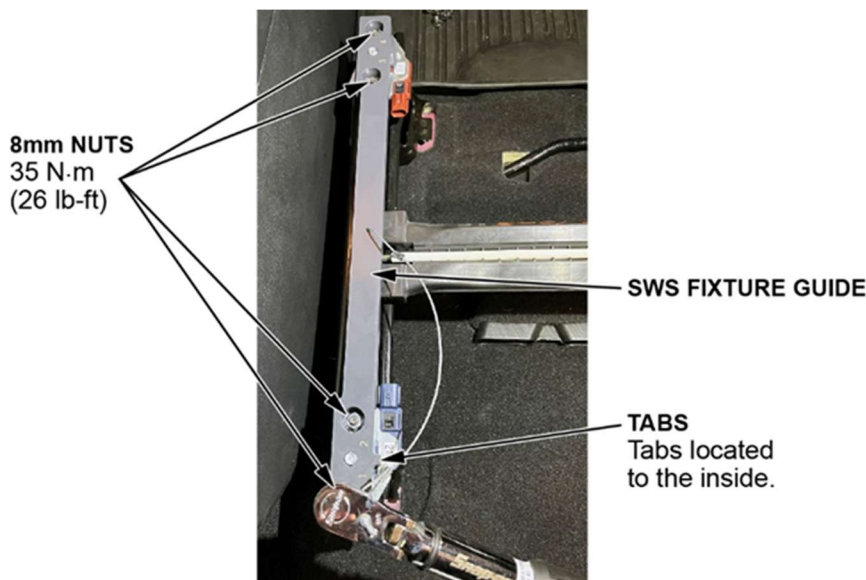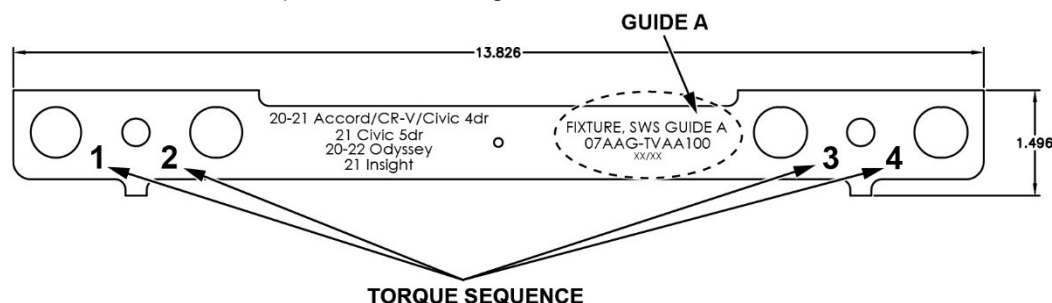


15. Remove the seat rail assembly from the vehicle.
16. Reinstall the seat rail assembly to the seat frame using new mounting nuts and spacers. Reuse the colored bushings and collars.

NOTE:

- Use the reference marks to align the seat rail and seat frame.
- The bushings and collars can be identified by their color.
- Make sure to install the bushing and collars as shown.

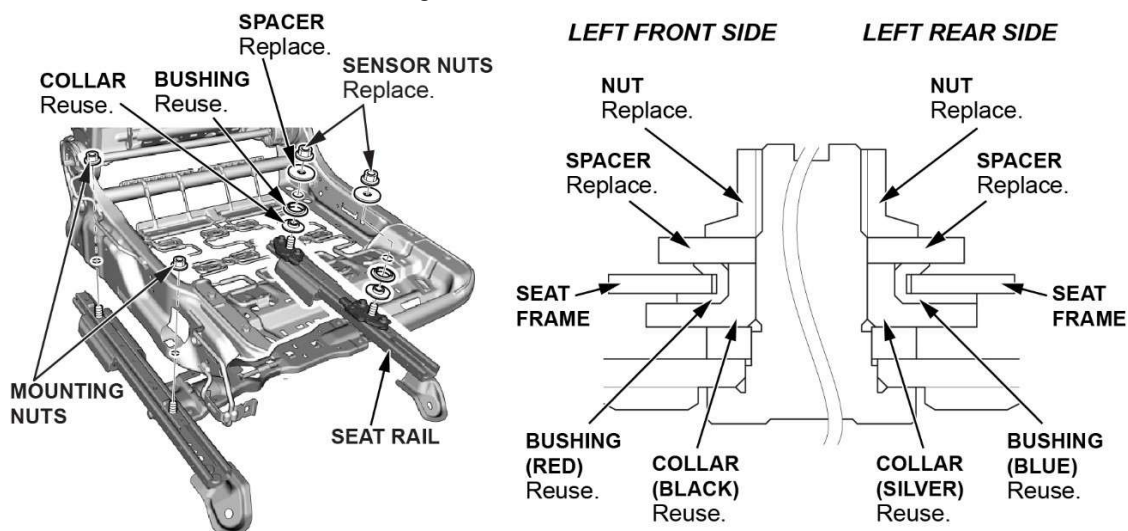


17. Use the Snap-On Torque Wrench (07AAA-TVAA400) and box-end head and torque the nuts to the specified torque **55 N·m (41 lb-ft)**.

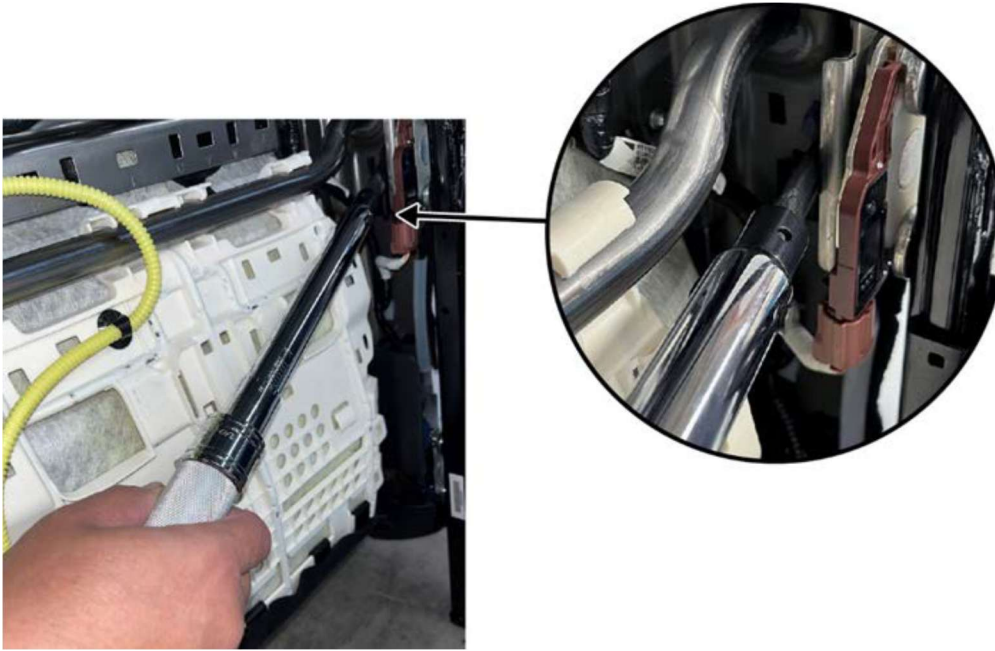

18. Reinstall all of the remaining parts removed in the reverse order of removal.
19. With the help of an assistant, reinstall the seat in the vehicle.
20. Reconnect the seat connectors and secure the harness clips.
21. Install the seat rail mounting bolts to the passenger seat, tighten the bolts by hand first.


NOTE: Torque the bolts to the specified torque **43 N·m (32 lb-ft)** and in the numbered sequence shown.

FRONT SIDE

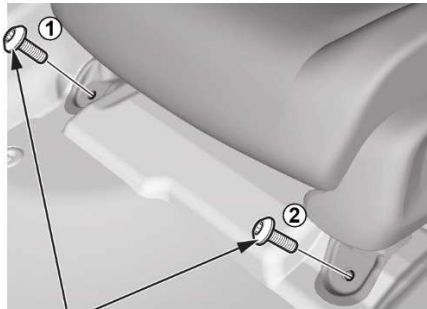

BOLTS
43 N·m
(32 lb-ft)

REAR SIDE

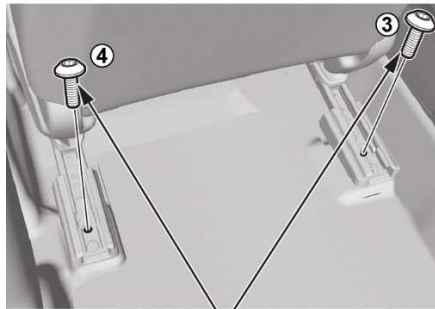


BOLTS
43 N·m
(32 lb-ft)

22. Connect the negative cable and the 12-volt battery sensor to the 12-volt battery.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))

NOTE: To protect the 12-volt battery sensor connector from damage, do not hold it when installing the negative terminal.

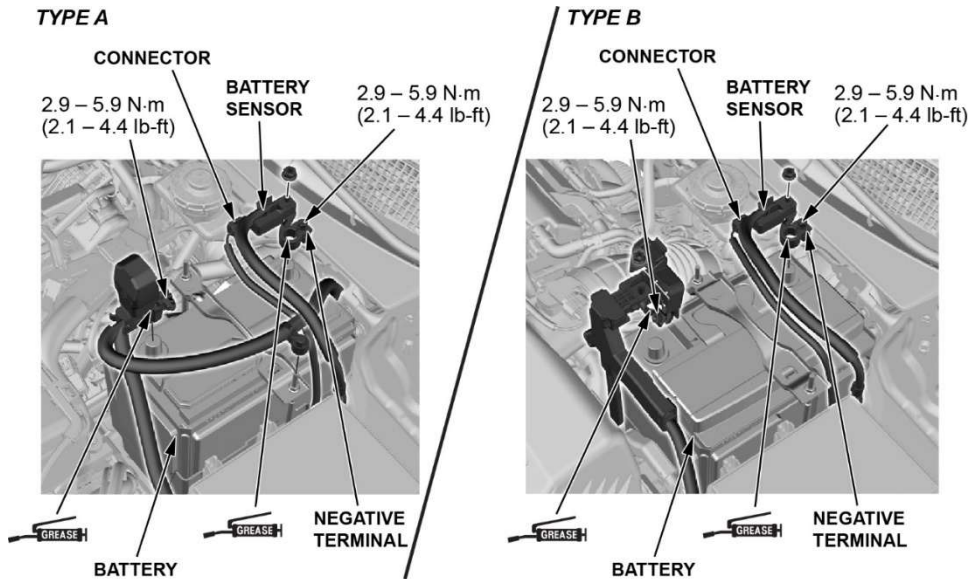

23. Do the seat weight sensor initialization.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))

24. Do the front weight sensor operation check.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))

25. Confirm SRS Operation: Turn the vehicle to the ON mode, check that the SRS indicator comes on for about **6 seconds** and then goes off.

26. Do the steering neutral position learn procedure using the method with the HDS.

- CR-V ([Click Here](#))
- CR-V Hybrid ([Click Here](#))