

# Emissions Recall

**Subject:** Fuel Tank Breather Hose Replacement

**Date:** 03-03-2009

**Bulletin:** R0029

**Campaign #:** A6230

**Affected Models:** Certain 2008 and 2009 NA6J (145), NB6J (165), NC6J (185), ND8J (238), NE8J (268), NJ8J (268A), NV8J (338)

**Important: Verify on the Hino DCS Warranty System that the vehicle still needs to have this work performed.**

**Description:**

This bulletin includes instructions for the replacement of the fuel tank breather hose. If the vehicle is equipped with dual fuel tanks the breather hose must be replaced on both fuel tanks.

**Condition:**

The fuel tank breather hose(s) has been modified to prevent water from entering into the fuel tank(s).

**Subject Vehicles:**

Certain 2008 and 2009 MY NA6J (145), NB6J (165) NC6J (185), ND8J (238), NE8J (268), NJ8J (268A), and NV8J (338) Hino conventional trucks assembled at the Long Beach, CA. or Williamstown, WV assembly plants.

**Before You Begin:**

*Read and understand all instructions and procedures before you begin. Read and observe all Caution and Warning safety alerts that precede these instructions while following these procedures. The alerts help to avoid damage to components, serious personal injury, or both.*




**Once Recall is completed**

Fill out the Recall Completion sticker as shown in the picture to the left. This sticker should be attached to the left door jam above the V.I.N. decal.

# Emissions Recall

## !!! WARNING !!!

- Park the vehicle on a flat and level surface.*
- Apply the parking brake.*
- Block the wheels to prevent the vehicle from moving.*
- Use care when working around surfaces which may be hot.*
- Wear safety glasses to prevent eye injuries.*
- Confirm the engine is stopped, the starter switch is in the off (LOCK) position, and the key is removed.*



**Campaign = A6230**

**Initial stock of campaign parts will be shipped to each dealer. The campaign number will be used as the purchase order: A6230.**

### Required Parts:

Part Number	Description	Quantity
SZ95061454	HOSE, Fuel Tank Breather	1 per fuel tank


1. Remove the top step to gain access to the fuel tank breather hose on top of fuel tank.

Open the right passenger side door to allow full access to the bolts.

**NOTE: The removal of the step is not required on 145, 165 or 185 models.**



2. Remove the fuel tank breather hose.

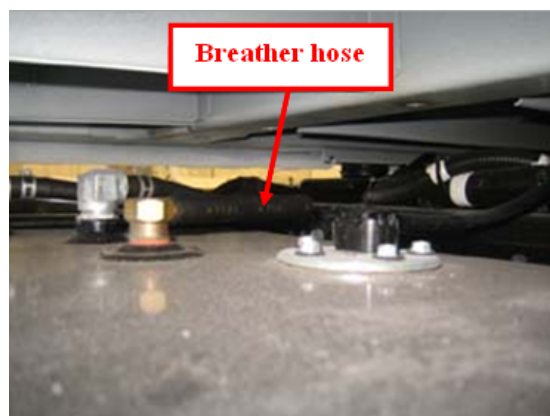

3. Install the new breather hose onto the fuel tank.

*If the vehicle is equipped with dual fuel tanks the fuel tank breather hose must be replaced on both fuel tanks.*



4. Reinstall the top step and torque the bolts to the specified torque.

**Specified Torque: 32 ft. lbs. (43 Nm)**



## **WARRANTY APPLICATION INFORMATION**

### **Single Tank**

CAMPAIGN NUMBER: A6230  
TIME ALLOWANCE: 0.3 Hours  
WARRANTY CODE: 12119/ TCode 98  
OPERATION CODE: 12250AOT  
ORIGINAL PART NUMBER: SZ95061484

### **Dual Tank**

CAMPAIGN NUMBER: A6230  
TIME ALLOWANCE: 0.4 Hours  
WARRANTY CODE: 12119/ TCode 98  
OPERATION CODE: 12250AOT  
ORIGINAL PART NUMBER: SZ95061484