

Date	Expiration	Release	Page
10.2012	10.2014	1	1(4)

PARKING BRAKE OVERRULE TANK SUPPORT - RETROFIT Prevost vehicles

DESCRIPTION

For the vehicles affected by this bulletin, reinforced parking brake overrule tank supports are available.

MODEL YEAR(S) AND VEHICLES INVOLVED

NOTICE TO SERVICE CENTERS	
Verify vehicle eligibility by checking warranty bulletin status with SAP or Vehicle Warranty Information tool found on Prevost-Systems tab of the Volvo Trucks Dealer Portal	
Model	VIN
NYCTA X3-45 Commuter Model Year : 2012	From 2PCG33495CC73 <u>5053</u> up to 2PCG33495CC73 <u>5232</u> incl.
This bulletin does not necessarily apply to all the above-mentioned vehicles, some vehicles may have been modified before delivery. The owners of the vehicles affected by this bulletin will be advised by a letter indicating the Vehicle Identification Number (VIN) of each vehicle concerned.	

The above list of VIN was valid at the time of publishing this document. Please refer to SAP for most recent information about outstanding vehicles

Order the following parts:

Part No.	Description	Qty
140921	MOUNTING SUPPORT	1
140922	SUPPORT BRACKET, AFT	1
140923	SUPPORT BRACKET, FORE	1
502830	SCREW, CAP HEX M6-1.08x20 G8.8	6
504775	T-BOLT BAND CLAMP, DIA. 9.85"	2
5001833	WASHER, SPRING BELLEVILLE 6.65x17.4	6

NOTE
Material can be obtained through regular channels.

Date	Expiration	Release	Page
10.2012	10.2014	1	2(4)

REQUIRED TOOLS

RATCHET AND 10mm METRIC SOCKET



TORQUE WRENCH



MEASURING TAPE



2x JACK STAND




PROCEDURE



DANGER


Park vehicle safely, apply parking brake, stop engine. In the battery box, set the battery cut-off switch to the OFF position prior to working on the vehicle.

- 1) Open the last L.H. side baggage compartment.
- 2) Place two appropriate jack stands under the parking brake overrule tank at about 12 inches from the tank.
- 3) Undo and discard the two t-bolt band clamps. Rest the tank on the jack stands.
- 4) Remove and discard the existing support brackets and mounting supports.
- 5) Preassemble the parking brake overrule tank as described on the image at right.


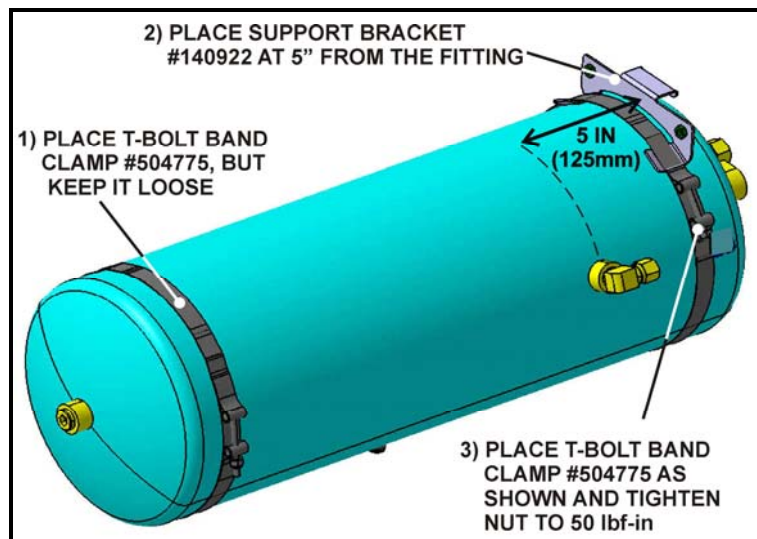


- 6) Mount the support bracket and the mounting support as described on the image at right.

CAP SCREW TORQUE: 84 lbf-in

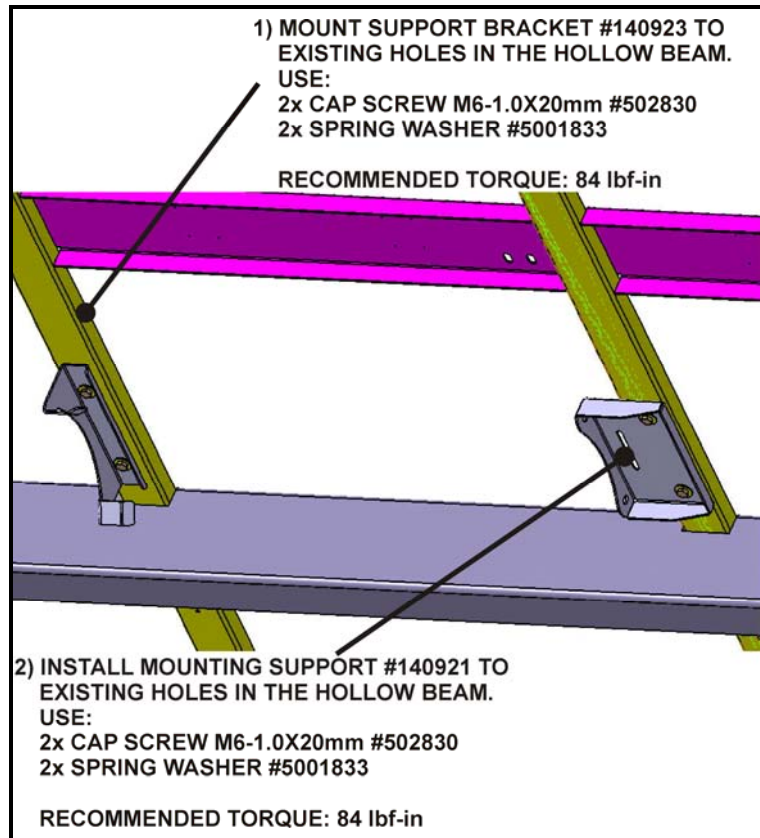

- 7) Mount the parking brake overrule tank onto the vehicle chassis as described on the image at right.

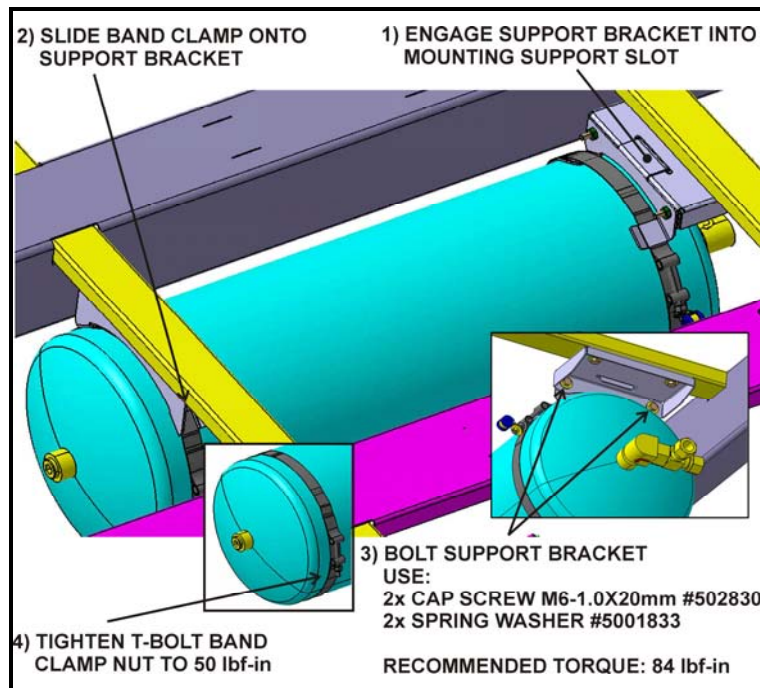

Date	Expiration	Release	Page
10.2012	10.2014	1	4(4)

PARTS / WASTE DISPOSAL

Discard waste according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

WARRANTY

This modification is covered by Prevost's normal warranty. We will reimburse you the parts and $\frac{3}{4}$ of hour (0.75) of labor upon receipt of a completed A.F.A. form on which you must specify as per "Special Bulletin 12-313".

OTHER

VBC Bulletin	n-a
Fail Code	12-05
Defect Code	09
System Condition	B
Causal Part	140898

Prevost engages in a continuous program of testing and evaluating to provide the best possible product. Prevost, however, is not committed to, or liable for updating existing products.