

General Information

When filing a warranty claim in OWL for this service bulletin, add the letter "T" to the end of the SB number. In this case, "49-5T".

When a vehicle equipped with a diesel exhaust fluid (DEF) system sits for an extended period of time, the DEF in the tank may crystallize around the float on the DEF level sending-unit tube and require cleaning. This crystallization may cause the float to stick on the tube. See **Fig. 1**. If the DEF level indicator displays an incorrect level reading, complete the procedure below.

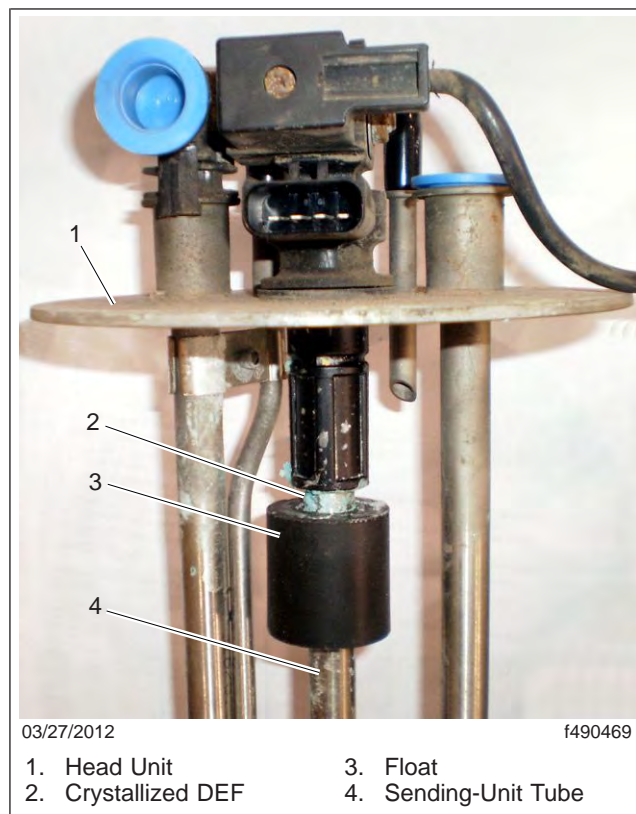


Fig. 1, Stuck DEF Float

1. Check to see if there is DEF in the tank. If the tank is not empty, drain the tank.
On vehicles with a 6-gallon DEF tank, disconnect the DEF line from the DEF outlet port and let the DEF drain into the drain pan.
On vehicles with a 13- or 23-gallon DEF tank, use a siphon to empty the DEF from the tank.
2. Remove the tank from the vehicle. For instructions refer to **Group 49** of the vehicle's Workshop Manual.
3. Remove the DEF-level sending unit. For instructions refer to **Group 49** of the vehicle's Workshop Manual.
4. Clean the float and tube thoroughly with hot water, to restore free movement of the float on the tube.
5. Clean all DEF crystallization from the remainder of the unit with hot water.
6. Using a digital multimeter (DMM), test the sending unit resistance to make sure it is working properly. Refer to **Table 1** for DEF level sensor resistance.

6.1 Connect the ohm meter to the sending unit connector on the pins identified in [Table 1](#).

NOTE: DEF level testing by moving the float with the sensor connected to the vehicle wiring is not recommended because the display response time to any movement in the DEF sensor float can take several minutes.

6.2 Position the float at the full, midpoint, and empty positions and compare the resistance to that shown in [Table 1](#).

If the readings are within approximately ± 10 percent of those listed in [Table 1](#), the unit is good. Go to the next step.

If the readings are not within range, replace the sending unit with a new one.

7. Install the sending unit in the tank. For instructions refer to [Group 49](#) of the vehicle's Workshop Manual.

8. Install the tank. For instructions refer to [Group 49](#) of the vehicle's Workshop Manual.

9. Fill the tank with DEF.

| DEF Level Sensor Resistance Measurement | | |
|-------------------------------------------|-----------------|----------------|
| Vehicle Engine | Detroit | Cummins |
| Test at Sensor Connector Pins | 1 and 2 | 1 and 4 |
| Resistance with Float at Top of Travel | ~19800 Ω | ~70 Ω |
| Resistance with Float at Center of Travel | ~2035 Ω | ~730 Ω |
| Resistance with Float at Bottom of Travel | ~240 Ω | ~4810 Ω |

Table 1, DEF Level Sensor Resistance Measurement

Warranty

This procedure is warrantable only if the described condition exists and the repair is performed within the applicable base or extended coverage warranty period. If a failure is not found, this procedure is considered preventive and warranty does not apply.

Normal warranty applies. See [Table 2](#) for QuickClaim damage code and labor allowance information. Refer to this service bulletin by number at the beginning of the claim comments. See [Table 3](#) for OWL VMRS codes and labor allowance information. Enter this service bulletin number in the *Service Bulletin #* field.

When filing warranty claims in OWL for this service bulletin, enter 49-5T as the service bulletin number.

| QuickClaim Damage Code and Labor Allowance | | | |
|--------------------------------------------|-----------|---------------------------------|-------------|
| Damage Code | SRT Code | Description | Time: Hours |
| 234-000A07130 | 234-5010A | DEF Level Sensor, R/R and Clean | 2.5 |

Table 2, QuickClaim Damage Code and Labor Allowance

| OWL VMRS Codes and Labor Allowance | | | | | |
|------------------------------------|----------------|------------|-----------|---------------------------------|-------------|
| Primary Failed Part | Component Code | Cause Code | SRT Code | Description | Time: Hours |
| DEF Level Sensor | 043-007-156 | 37 | 234-5010A | DEF Level Sensor, R/R and Clean | 2.5 |

Table 3, OWL VMRS Codes and Labor Allowance