

Front Wheel Opening Extension Pad Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports ASE Certification 

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2014	ES300H, ES350	

Introduction

The front wheel opening extension pad set (right and left front wheel opening extension pads, 2 tapping screws) is loaded in the luggage compartment at the assembly plant to avoid damage in transit. Install the front wheel opening extension pads to the vehicle during Pre-Delivery Service (PDS).

Warranty Information


OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-

Installation Procedure

1. Remove the 2 self-tapping screws from the left front engine under cover.

NOTE
The removed self-tapping screws will be reused.

Figure 1.

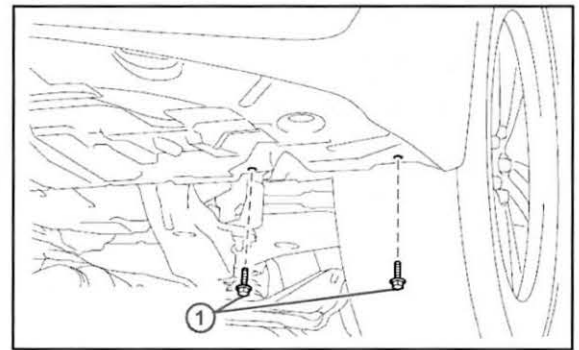

1	Tapping Screw
---	---------------

Front Wheel Opening Extension Pad Installation During PDS


Installation Procedure (Continued)

- Place the left front wheel opening extension pad in position. Using the 2 original self-tapping screws and 1 of the provided self-tapping screws, install the extension pad by tightening the 3 self-tapping screws as shown in Figure 2.

NOTE

There is a distinguishable mark on each pad that identifies the right and left side.

Figure 2.

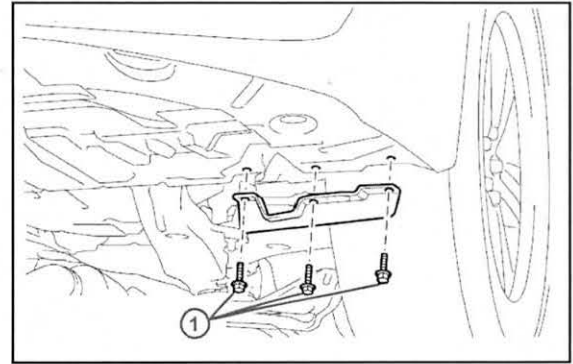

1	Tapping Screw
---	---------------

- Repeat steps 1 and 2 to install the right front wheel opening extension pad.