


**ElDorado
National - Kansas**
Thor Industries Mobility Division

Picture 1

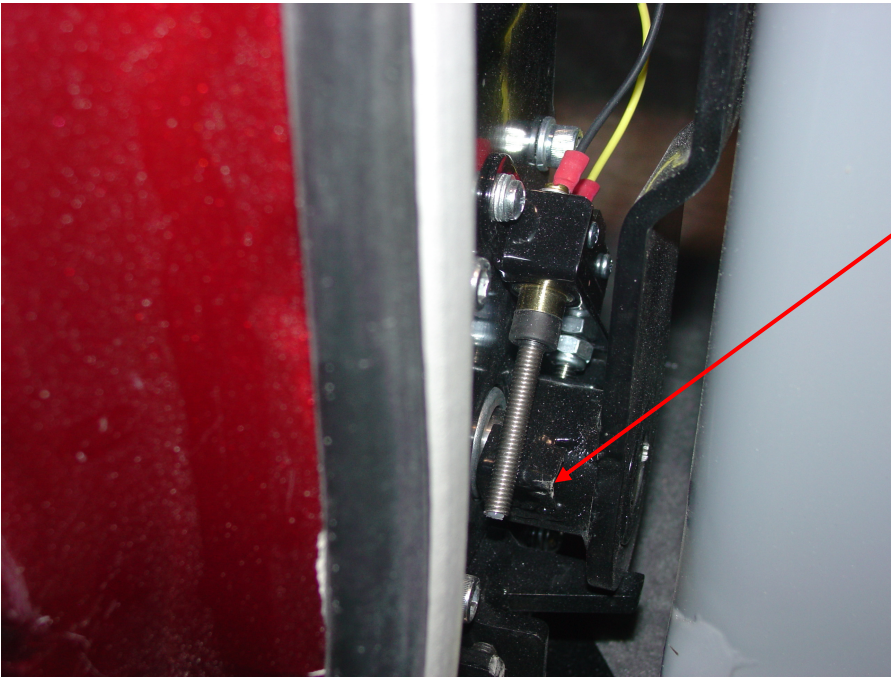


**ElDorado National Amerivan 08-13
Chrysler, Dodge or VW stow switch
adjustment information with a 14
inch drop.**

The main drive arm activates the switch

To access the switch there is ABS cover
that needs removed.

Picture 2

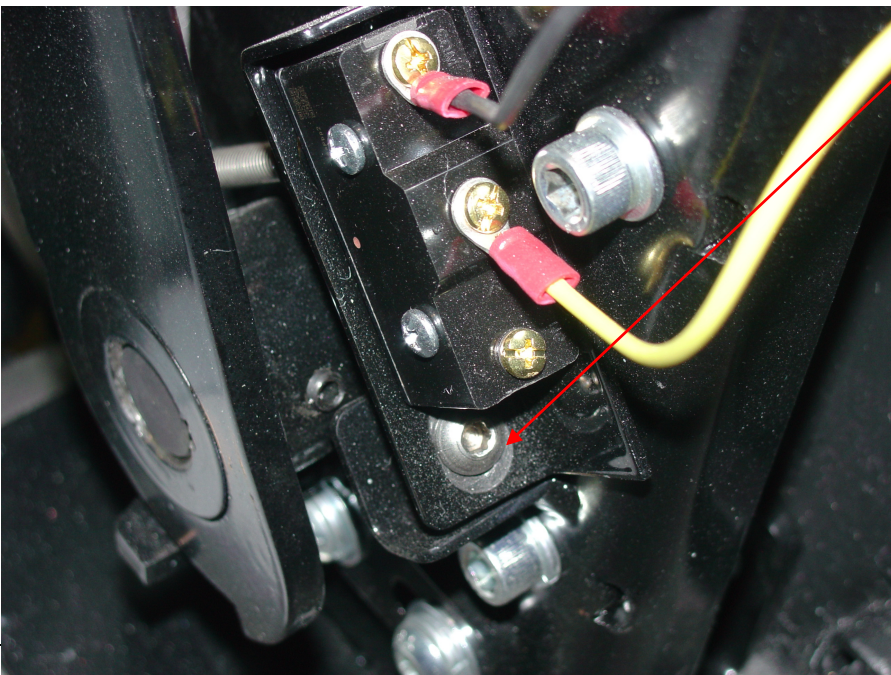

To adjust the switch you turn this
adjustment screw.


Turning it clockwise will activate the
switch later meaning the ramp will stow
further into the van.

Turning is counter clockwise will
activate the switch early meaning the
ramp stop faster.

785-827-1033 • Fax 785-493-2037

Web Page: www.amerivans.com • E-mail: sales@enconline.com

Picture 3

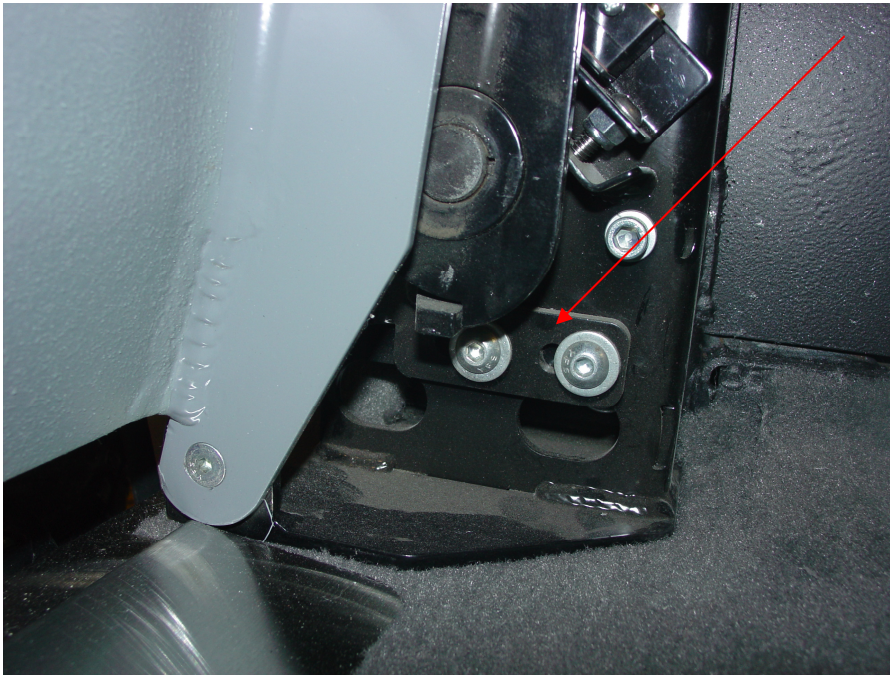

When adjusting the stow switch the location of the physical stop is critical. The red arrow in picture 3 shows the stop.

To adjust the physical stop, loosen the two bolts shown in picture 3, and the set screw shown in picture 4.

When making adjustments, please note the stow switch should stop the ramp at the desired location, allowing for proper door closing. Once the stow switch is set, then move the physical stop. With the ramp stowed and door open, the stop should not be touching; it should have roughly a 1/16 inch gap. Then, once the door is closed, the ramp will move against the stop.

Operate the system to confirm that the door closes every time. If the door auto-reverses when closing, the ramp will need to be adjusted further for proper clearance.

Picture 4

