


2014 PRF-DELIVERY SERVICE CHECK SHEET

2017		1 ,			OHEON OHEER	November 2013	
BEFORE INSPECTIO	N	OK Adjust/ Repair	uebau	UNDER VEH	IICLE (ON HOIST)	OK Adjust/ Repair	
				01 Remove disc brake anti-rust covers/anti-corrosion wheel film* 02 Inspect tires for defects/damage and adjust air pressure		e	
FUNCTIONAL OPERATION					re tire) Pressure Warning System (TPWS) (see	0 0	
Apply parking brake and cycle ignition "IG-ON"; place gear selector in rever turn on lights and rear defogger. Unlock doors; release fuel door.				page 2)	🗖		
02 Check warning/indicator lig 03 Check windshield wipers a 04 Check headlights, instrum emergency flashers, and b	orake lights			06 Inspect under 07 Visually check for looseness 08 Install rubber I	the vehicle for damage, rust, etc		
05 Check inside/outside rear adjustment*	view mirror operation/	00		ROAD TEST			
06 Check cigarette lighter* ar 07 Check audio/navigation*/b set clock	nd power outlets packup camera* systems and				helps assure customer satisfaction. Drive vehicle es and driving conditions. Check for unusual nois		
09 Check Rear Seat Entertain	8 Check sliding roof* 9 Check Rear Seat Entertainment System operation* 0 Install shift-lock override button cover			Enter Odometer Rea Reading Before Test:	.		
WALKAROUND INSPECTION				01 Check cold engine operation			
Start at left front door. Check window and door lock operation (from master switch, if equipped). Continue around vehicle in a counterclockwise dichecking each door and window operation, child door locks, seat belts, it condition, all lights, luggage compartment contents. Finish by checking he aim and continue into UNDER HOOD checks.			-	04 Check automatic transmission operation		0 0 r. 0 0 0 0	
01 Check Smart Key System*				09 Check front ar 10 Check cruise of	nd rear* heater and A/C operationcontrol operation*eat heater/ventilation operation*		
04 Check that engine starts with all keys				FINAL INSPE	ECTION AND CLEANING		
(unlocked) position	(unlocked) position			 01 Remove interior protective covers, unnecessary labels, tags, etc. (Remove just before delivery to customer) 02 Visually inspect all interior parts for installation, damage, fit, dirt, etc 03 Verify floor mat application and install using retaining clips* 04 Remove Rapgard™ and clear protective bumper film* 05 Wash and clean vehicle 			
UNDER HOOD				06 Inspect paint finish for scratches, chips, rust, dents, damage, etc			
01 Check engine oil level				08 Place oil change sticker on inside of windshield, top left corner			
* Inspect or install when equipped/required.			┤	COMMENTS:			
Completion and retention of this from is required to comply with Toyota's Warranty Policy. We hereby certify that all items						all items	
TECHNICIAN'S SIGNATURE SERVICE			AGEF	R'S SIGNATURE	on this form have been of and corrected for pro-	checked oper	
NAME (PLEASE PRINT)	NAME (PLEASE	PRI	NT)			
Date Dealer Na	ame		Dea	aler Code	Vehicle Identification Number (Sticker)		

D/C CUT FUSE INSTALLATION

To minimize battery discharge the D/C Cut Fuse has been removed and is stored in the engine compartment Relay Block. Install the D/C Cut Fuse and confirm all related DTCs are cleared.



1 D/C Cut Fuse Storage Location

2 Install D/C Cut Fuse Here

TPWS INITIALIZATION

Refer to the Repair Manual for the Initialization Procedure.

NOTE

- Please note the spare tire does NOT have a TPWS sensor.
- To adjust the tire pressure correctly when the outside temperature is significantly colder than shop temperature, perform a Health Check using Techstream and select the "Compensation Tire Pressure" checkbox. Compensation pressures will be displayed on the Health Check results screen. Adjust the tire pressure when the tires are cold.

FRONT LICENSE PLATE & MOUNTING BRACKET INSTALLATION*

1. Align holes "A" of the mounting bracket with the dimples on the front bumper cover. Mark the location of holes "B" on the front bumper cover.

NOTE

- Holes "A" are used for installation of the mounting bracket to the bumper cover.
- Holes "B" are used for the installation of the front license plate to the mounting bracket.
- 2. Drill 2 relief holes with a diameter of 11 mm (0.43 in.) at the hole "B" marks on the front bumper cover to prevent the license plate retaining bolt end from contacting cover.


NOTICE

Do NOT drill at the dimples on the front bumper cover.

- 3. Install the mounting bracket to the front bumper cover by attaching the 2 self-tapping screws into the dimples.
- 4. Install the front license plate to the mounting bracket using bolts with the following measurements:

Length: 15.0 - 23.0 mm (0.59 - 0.91 in.)

Diameter: 6.0 mm (0.24 in.) Pitch: 1.0 mm (0.04 in.)

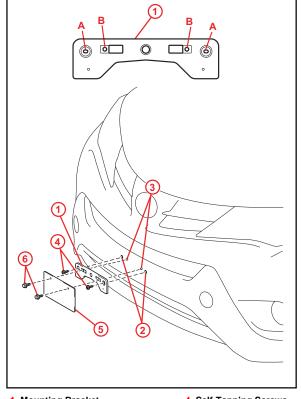

- 1 Mounting Bracket
- 2 Dimples
- 3 Mark and Drill Holes
- 4 Self-Tapping Screws
- 5 License Plate
- 6 Bolts