



Technical Service Bulletin

SUBJECT:		No: TSB-13-42A-004	
FRONT FENDER REMOVAL AND INSTALLATION – SERVICE MANUAL REVISION		DATE: April, 2013	
		MODEL: 2011-13 Outlander Sport /RVR	
CIRCULATE TO:	<input type="checkbox"/> GENERAL MANAGER	<input checked="" type="checkbox"/> PARTS MANAGER	<input checked="" type="checkbox"/> TECHNICIAN
<input checked="" type="checkbox"/> SERVICE ADVISOR	<input checked="" type="checkbox"/> SERVICE MANAGER	<input type="checkbox"/> WARRANTY PROCESSOR	<input type="checkbox"/> SALES MANAGER

PURPOSE

This TSB updates the front fender removal and installation procedures in affected service manuals.

AFFECTED VEHICLES

2011-2013 Outlander Sport/RVR

AFFECTED SERVICE MANUALS

2011 – 2013 Outlander Sport Service Manuals: Group 42A Body > Front Fender > Removal and Installation

Continued

Copyright 2013, Mitsubishi Motors North America, Inc.


(3992)

The information contained in this bulletin is subject to change. For the latest version of this document, go to the Mitsubishi Dealer Link, MEDIC, or the Mitsubishi Service Information website (www.mitsubishitechinfo.com).

Please add the following information to:
 2011 – 2013 Outlander Sport Service Manuals: Group 42A Body > Front Fender > Removal and Installation

REMOVAL AND INSTALLATION

- Pre-removal and post-installation operation**
- Front wheelhouse splash shield removal and installation (Refer to P42-9).
 - Front bumper assembly removal and installation (Refer to GROUP 51 – Front Bumper Assembly .)
 - Headlight assembly removal and installation (Refer to GROUP 54A – Headlight .)
 - Side turn-signal light removal and installation (Refer to GROUP 54A – Side turn-signal light .)
 - Front deck garnish removal and installation (Refer to GROUP 51 – Windshield Wiper .)
 - Side air dam removal and installation (Refer to GROUP 51 – Side Air Dams .)

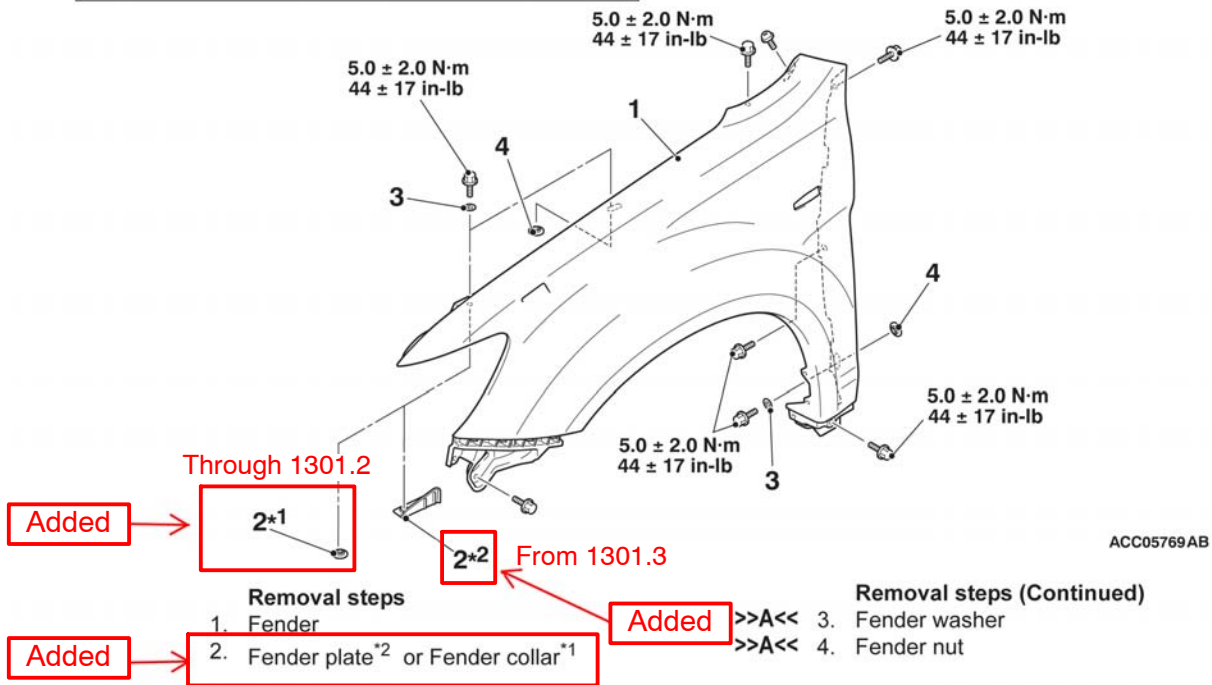

INSTALLATION SERVICE POINT

>>A<< FENDER NUT/ FENDER WASHER INSTALLATION

1. Fit the fender nut to the fender.
2. Fit the fender washer to the fender and fender plate.
3. Install the bolts.

