Audi of America, Inc.

Audi

Dear Audi Dealers,

We would like to inform you of some new tools that will be shipped to your dealership by the beginning of April.

In cooperation with AUDI AG, the AoA Product Support department has created a new method for cleaning the accumulated carbon in the secondary air system in the Audi Q5 AVS, A6 3.0T & 3.2AVS, and the Q7 3.0T, as well as designed a special set of required cleaning tools.

For the new cleaning procedure you need:


1. Tool set VAS6825 and VAS6825/1 (mandatory VAS tool)
2. Ready to use Hausfeld & Campbell pressure washer (supplied free of charge by AoA Product Quality) Model: CP532 specification: 220V, 20A, 2900psi at 2.5GPM
3. For safe use complete WBT *Audi Secondary Air Injection Port Cleaning (*Audi Academy Course #940134) before performing cleaning for the first time
4. Apply new TSB 2033001

Audi of America, Inc.
3800 Hamlin Road
Auburn Hills, MI 48326
+1 248 754 4800
www.audiusa.com

The new cylinder head cleaning process is much less labor-intensive. From a customer point-of-view, the new cleaning process is not as intrusive to their Audi, as no engine removal is needed and the repair can be completed in one day, which leads to customer confidence and K*b*.



Pressure Washer

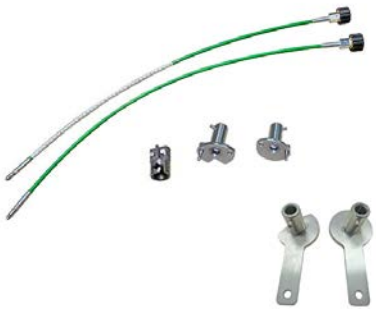

Special Tool Set