

SB-10051885-4353

Countries:	CANADA, UNITED STATES, MEXICO	Document ID:	IK1200431
Availability:	ISIS, Fleet! ISIS, Body Builder	Revision:	2
Major System:	ENGINES	Created:	1/8/2010
Current Language:	English	Last Modified:	3/5/2013
Other Languages:	Portuguese ,	Author:	Al Schnellenberger
Viewed:	483		

[Less Info](#)
☒ Hide Details

Coding Information


Copy Link	Copy Relative Link	Bookmark	Add to Favorites	Print	Provide Feedback	Helpful	Not Helpful
		 View My Bookmarks				 95	 118

Title: 2006-2009 Cummins Ambient Air Temperature (AAT) Sensor Located Rear of Vehicle

Applies To: ProStar, LoneStar, TransStar

DESCRIPTION

The Cummins engine air temperature sensor may be relocated at the rear of the chassis, instead of the front, on some models. This can be mistaken for a ground connector. Do not bolt this sensor to ground. It should remain strapped to the harness.

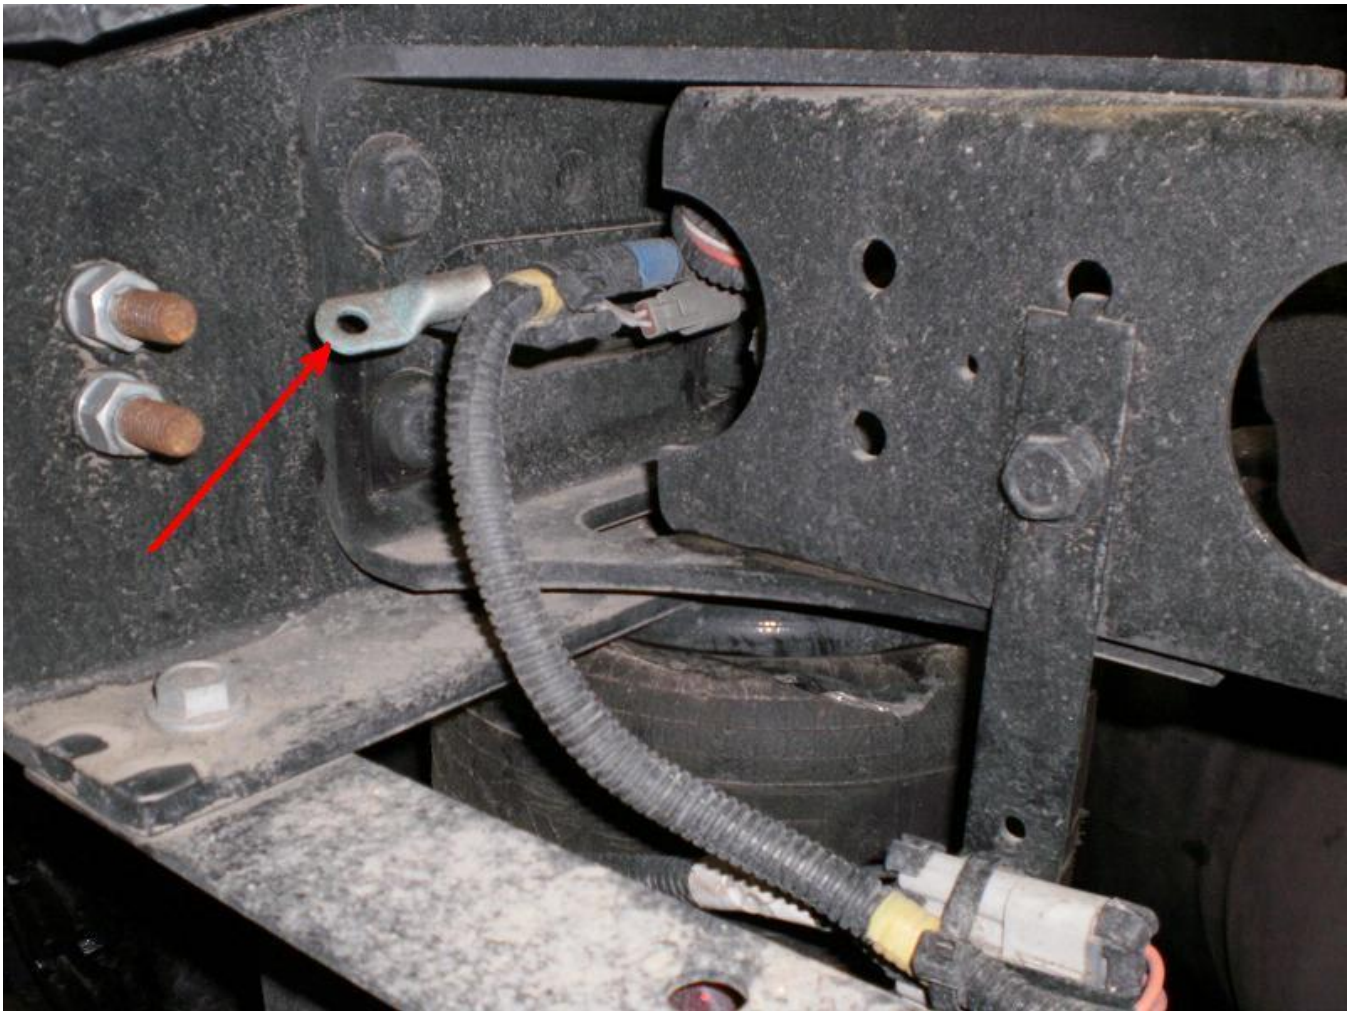

RESOLUTION

This can be mistaken for a ground connector (lug). Do not bolt this sensor to ground. It should remain strapped to the harness.

 Hide Details

Feedback Information

Viewed: 482

Helpful: 95

Not Helpful: 118

No Feedback Found

Copyright © 2013 Navistar, Inc.