



Date: June 20, 2013  
 Order No.: V-B-47.25/02  
 Group: 47

**SUBJECT: MY-All, Model 906 with Engine 642  
 Information on Low-Pressure Fuel Hoses**


Please note that improper disassembly of the low-pressure fuel hoses on the fuel filter can cause damage (e.g. when changing the fuel filter).

Inserting a sharp-edged tool between the hose and fitting may damage the inside of the low-pressure fuel hose. This can result in the low-pressure fuel hose leaking over time or detached hose particles from damaged hose can contaminate the high-pressure pump and the fuel system.

**Procedure**

1. Remove the fuel hose from the fitting by pressing a blunt object, such as a plastic wedge, or by using a blunt or broad-edged tool at the end of the hose while twisting the hose with your hand. Do not use any sharp-edged pliers.

**NOTE:** Do not insert any sharp-edged tools between the hose and fitting or you risk damaging the fuel low-pressure hose. (Figure 1.)

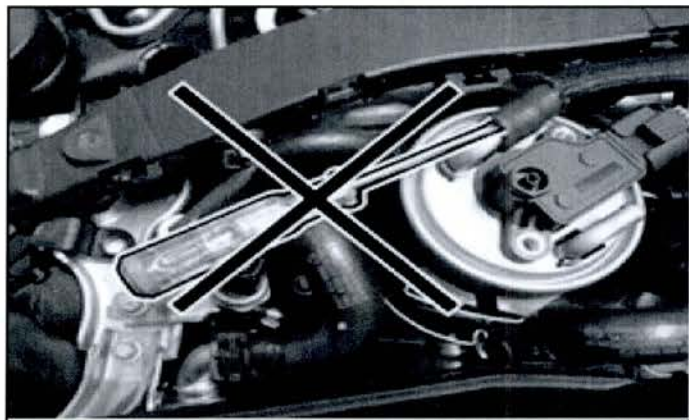

**Figure 1.**

P47.00-2219-01

This bulletin has been created and maintained in accordance with MBUSA-SLP S423QH001, Document and Data Control, and MBUSA-SLP S424HH001, Control of Quality Records.