

 HYUNDAI NEW THINKING. NEW POSSIBILITIES. Technical Service Bulletin	GROUP CAMPAIGN	NUMBER 13-01-043
	DATE NOVEMBER 2013	MODEL(S) ELANTRA (UD)
SUBJECT: MANUAL TRANSAXLE FLUID FILL (SERVICE CAMPAIGN TQ9)		

★ IMPORTANT
***** DEALER STOCK ONLY *****

Dealers must perform this Service Campaign on all affected vehicles prior to customer retail delivery.

When a vehicle arrives at the Service Department, access Hyundai Motor America's "Warranty Vehicle Information" screen via WEBDCS to identify open Campaigns.

Description: This bulletin describes the procedure to drain and refill the manual transaxle oil to the specified capacity.



Applicable Vehicles: Produced: 10/17/2013~11/1/2013. 2013MY Elantra (UD) 1.8L with manual transmissions

Parts Information:

Part Name	Part Number	QTY
Transaxle Gear Oil	08950-00020-B	2

Warranty Information:

Model	Op Code	Operation	Op Time
Elantra (UD)	30CA04R0	Transmission Fill	0.3

Circulate To: General Manager, Service Manager, Parts Manager, Warranty Manager, Service Advisors, Technicians, Body Shop Manager, Fleet Repair


SUBJECT: MANUAL TRANSAXLE FLUID FILL (SERVICE CAMPAIGN TQ9)

NOTE: Submit Claim on Campaign Claim Entry Screen

Service Procedure:

1. Park the vehicle on a level surface and stop the engine.


Loosen the drain plug **(A)** and drain the manual transaxle oil.

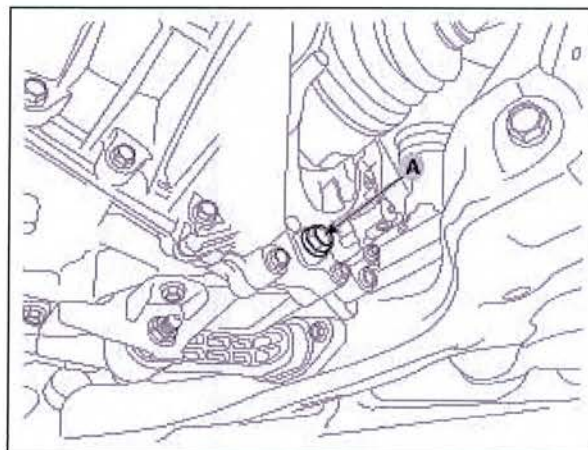

2. Install the drain plug.

Tightening Torque:
59~79 Nm (6~8 kgf-m, 43~58 lb-ft).


3. Remove the filler plug bolt **(A)** and add new oil through the filler plug hole.

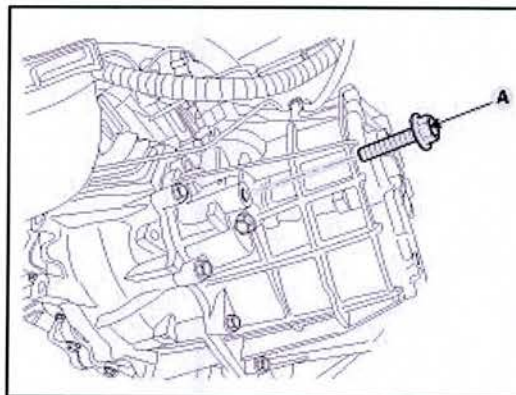

4. Fill until the fluid flows out in a thin steady stream.

Standard oil: SAE 75W/85, API GL-4

Oil capacity: 1.9L (0.50 U.S.gal., 2.0 U.S.
qt., 1.67 Imp qt.)

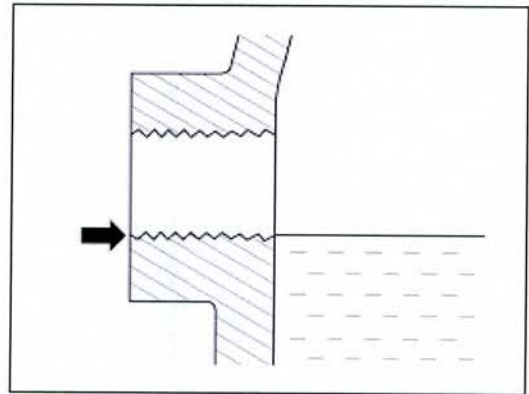

5. Install the filler plug bolt.

Tightening Torque:
59~79 Nm (6~8 kgf-m, 43~58 lb-ft).