



HYUNDAI

Technical Service Bulletin

GROUP

HVAC

NUMBER

13-HA-001

DATE

FEBRUARY 2013


MODEL

ALL MODELS

SUBJECT A/C PRESSURE TRANSDUCER SERVICE PROCEDURE

Description:

This bulletin provides important service information to properly remove and install the A/C pressure transducer during A/C system repair.

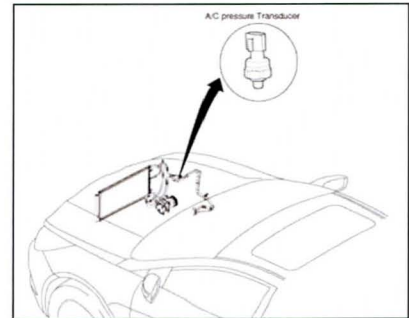

Applicable Vehicles:

- All models equipped with an air conditioning system

Service Information:

- Refer to applicable Shop Manual to perform the required service work.
- When removing or installing the A/C pressure transducer, **ALWAYS** support the hex portion of the sensor port with an open ended wrench.
 - This prevents any damage to the A/C pipe due to twisting force of the wrench.



NOTICE

Failure to do so may cause damage to the A/C pipe, resulting in leakage of refrigerant.

- While the sensor port is supported with the open-ended wrench, the A/C pressure transducer can now be safely removed or installed by using a deep socket wrench.
 - Refer to applicable Shop Manual for tightening torque specification.



Circulate To: General Manager, Service Manager, Parts Manager, Warranty Manager, Service Advisors, Technicians, Body Shop Manager, Fleet Repair