

NUMBER: 08-084-13 REV. A

GROUP: Electrical

DATE: November 13, 2013

This bulletin is supplied as technical information only and is not an authorization for repair. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without written permission of Chrysler Group LLC.

THIS BULLETIN SUPERSEDES SERVICE BULLETIN 08-084-13, DATED NOVEMBER 02, 2013, WHICH SHOULD BE REMOVED FROM YOUR FILES. ALL REVISIONS ARE HIGHLIGHTED WITH **ASTERISKS**** AND INCLUDE ADDING POLICE VEHICLES TO THIS RRT.**

THIS SERVICE BULLETIN IS ALSO BEING RELEASED AS RAPID RESPONSE TRANSMITTAL (RRT) 13-080. ALL APPLICABLE SOLD AND UN-SOLD RRT VIN's HAVE BEEN LOADED. TO VERIFY THAT THIS RRT SERVICE ACTION IS APPLICABLE TO THE VEHICLE, USE VIP OR PERFORM A VIN SEARCH IN TECHCONNECT. ALL REPAIRS ARE REIMBURSABLE WITHIN THE PROVISIONS OF WARRANTY.

SUBJECT:

Decklid Opens Unintentionally

OVERVIEW:

This bulletin involves inspecting the decklid passive entry switch and replacing if necessary.

MODELS:

2011 - 2013	LD	Charger
2011 - 2013	LX	300

NOTE: **This bulletin applies to vehicles built on or after May 5, 2010 (MDH 0505XX) and on or before June 20, 2013 (MDH 0620XX) with Center High Mounted Stop Lamp (Sales Code LPA or LPN)**.****

SYMPTOM/CONDITION:

The decklid opens unintentionally when the vehicle is in park and the customer is within proximity.

DIAGNOSIS:

If a customer's VIN is listed in VIP or your RRT VIN list, perform the repair. For all other customers that describe the symptom/condition, perform the Repair Procedure.

PARTS REQUIRED:

Qty.	Part No.	Description
1	68087978AC	Switch, Passive Entry / Decklid Passive Entry Switch

REPAIR PROCEDURE:

1. Determine if the trunk passive entry switch button surface is plastic (slippery) or rubber (grippy) by rubbing a finger across the switch button surface to detect the surface material. Appearance is very similar and may require careful examination to detect which version of switch is installed (Fig. 1).
 - a. Plastic (1) (Fig. 1) replace the switch, perform the repair procedure.
 - b. Rubber (2) (Fig. 1) no further action is required, return the vehicle to the customer.

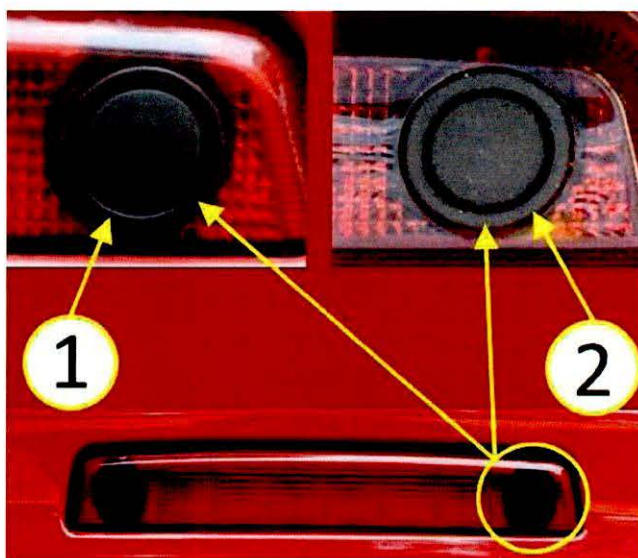


Fig. 1 Passive Entry Switch Button Surface

- 1 - Plastic Button
2 - Rubber Button

NOTE: On LX vehicles the passive entry switch may be replaced without removing the center high mounted stop lamp (CHMSL) from the decklid. However all other procedure steps published in this bulletin and in TechCONNECT Service Info still apply to passive entry switch replacement.

2. Remove the center high mounted stop lamp (CHMSL) from the decklid. Refer to the detailed removal procedures available in DealerCONNECT>TechCONNECT> under: Service Info> 08 - Electrical> 8L - Lamps and Lighting> Lamps/Lighting - Exterior> LAMP, Center High Mounted Stop> Removal.
3. Inspect the CHMSL to decklid seal for any damage and/or deterioration. Replace if necessary to prevent water intrusion (Fig. 2).

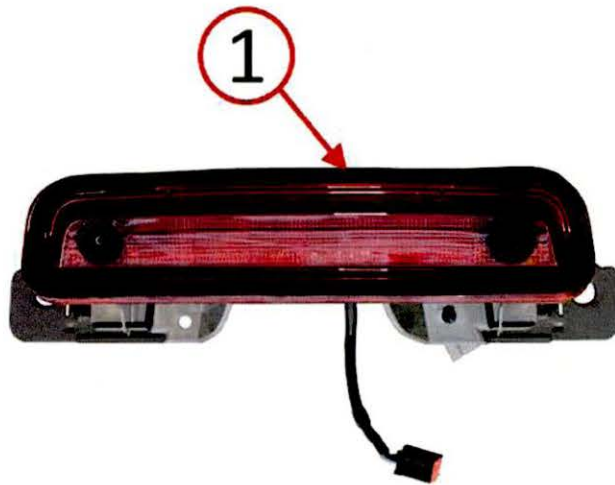


Fig. 2 CHMSL Seal

1 - CHMSL Seal

-
4. Remove the passive entry switch from the CHMSL housing. Refer to the detailed removal procedures available in DealerCONNECT>TechCONNECT> under: Service Info> 08 - Electrical> 8N - Power Systems> Power Locks> SWITCH, Deck Lid Release> Removal ([Fig. 3](#)).

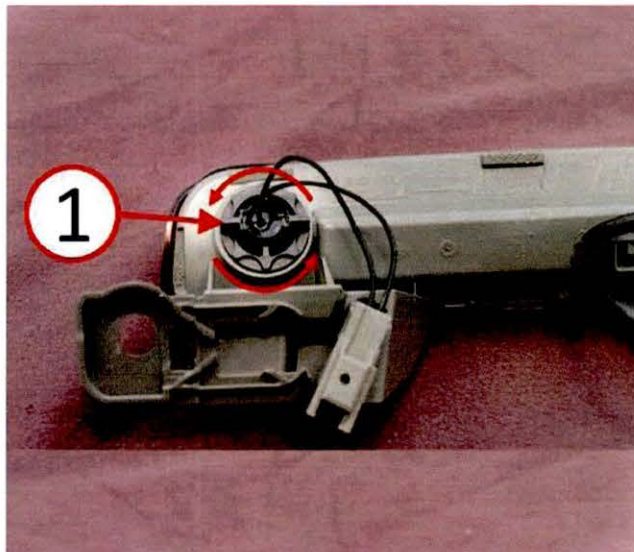


Fig. 3 Passive Entry Switch Removal

1 - Passive Entry Switch

5. Replace previous version plastic button passive entry switch (1) with new version rubber button passive entry switch (2) (Fig. 4).

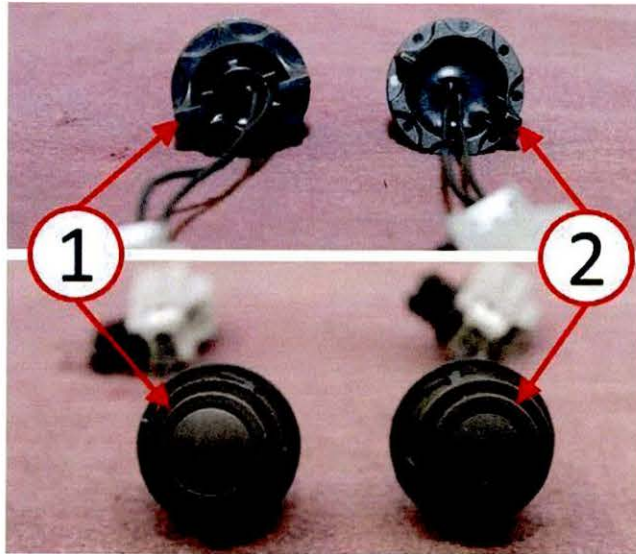


Fig. 4 Switch Version

- 1 - Plastic Button Passive Entry Switch
- 2 - Rubber Button Passive Entry Switch

-
6. Install the NEW passive entry switch into the CHMSL housing. Refer to the detailed installation procedures available in DealerCONNECT>TechCONNECT> under: Service Info> 08 - Electrical> 8N - Power Systems> Power Locks> SWITCH, Deck Lid Release> Installation (Fig. 5).

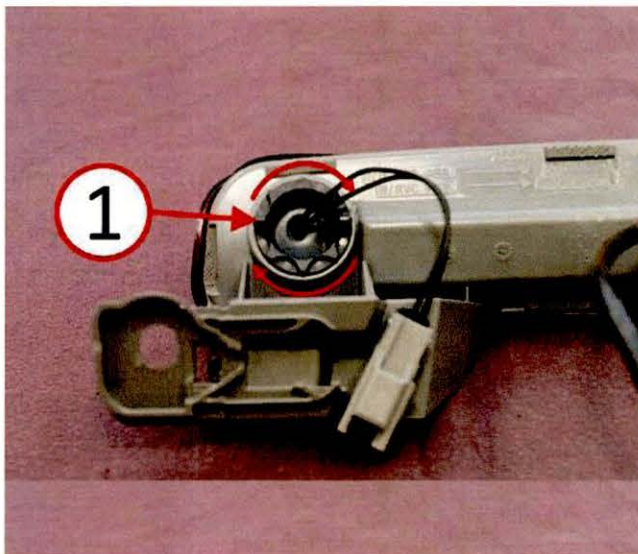


Fig. 5 Passive Entry Switch Installation

1 - Passive Entry Switch

-
7. Install the CHMSL to the decklid and tighten the CHMSL fasteners to 10 N·m (89 in. lbs.), refer to the detailed installation procedures available in DealerCONNECT>TechCONNECT> under: Service Info> 08 - Electrical> 8L - Lamps and Lighting> Lamps/Lighting - Exterior> LAMP, Center High Mounted Stop> Installation.

POLICY:

Reimbursable within the provisions of the warranty.

TIME ALLOWANCE:

Labor Operation No:	Description	Skill Category	Amount
08-80-20-92	Inspect Passive Entry Switch (1 - Semi-Skilled)	6- Electrical And Body Systems	0.2 Hrs.
08-80-20-93	Inspect and Replace Passive Entry Switch (1 - Semi-Skilled)	6- Electrical And Body Systems	0.3 Hrs.

FAILURE CODE:

ZZ	Service Action
----	----------------