


2014 PRE-DELIVERY SERVICE CHECK SHEET

November 2013

BEFORE INSPECTION	OK	Adjust/ Repair	UNDER VEHICLE (ON HOIST)	OK Adjust/ Repair
01 Install D/C Cut Fuse (see page 2)	00		01 Remove disc brake anti-rust covers/anti-corrosion wheel film* 02 Inspect tires for defects/damage and adjust air pressure	0 0
FUNCTIONAL OPERATION			(including spare tire)	00
Apply parking brake and cycle ignition "IG-ON"; place gear selector in reverse; turn on lights and rear defogger. Unlock doors; release fuel door.			page 2)	The state of the s
O1 Check dome, courtesy, map, and sun visor lights	000 0		O5 Inspect for fuel, oil, coolant, and other fluid leaks	00 00 0
adjustment*			ROAD TEST	NE BIGI
06 Check cigarette lighter* and power outlets			A complete road test helps assure customer satisfaction. Drive vehicle ov variety of road surfaces and driving conditions. Check for unusual noise ardriving performance.	
08 Check sliding roof* 09 Check Rear Seat Entertainment System operation* 10 Install shift-lock override button cover	000		Enter Odometer Readings Reading Before Test: Reading After Test:	
WALKAROUND INSPECTION		i i	01 Check cold engine operation	
Start at left front door. Check window and door lock operation (from mass switch, if equipped). Continue around vehicle in a counterclockwise checking each door and window operation, child door locks, seat belt condition, all lights, luggage compartment contents. Finish by checking aim and continue into UNDER HOOD checks.	direc s, inte	tion erior	03 Check engine at normal operating temperature	000000
O1 Check Smart Key System* O2 Check door and door lock operation, including each wireless remote control/theft deterrent system* O3 Check window operation	0 000		08 Inspect for squeaks and rattles	0000
04 Check that engine starts with all keys			FINAL INSPECTION AND CLEANING	
(unlocked) position 06 Check seats and seat belt operation 07 Check rear defogger/rear view mirror defogger* 08 Check side marker, tail, backup, cargo*, and license plate lights 09 Check luggage compartment light* and trim appearance 10 Check jack and tool installation 11 Check headlight aim	000 0000	000 000	 01 Remove interior protective covers, unnecessary labels, tags, etc. (Remove just before delivery to customer) 02 Visually inspect all interior parts for installation, damage, fit, dirt, etc 03 Verify floor mat application and install using retaining clips* 04 Remove Rapgard™ and clear protective bumper film* 05 Wash and clean vehicle 06 Inspect paint finish for scratches, chips, rust, dents, 	0 0 0 0
UNDER HOOD			damage, etc	
01 Check engine oil level	00 0000		07 Inspect exterior body parts for proper installation, damage, rust, etc	0 000 0
* Inspect or install when equipped/required.	1	-	COMMENTS:	
Completion and retention of this from is required to comply with Toyota's Warranty Policy. We hereby certify that all items				
TECHNICIAN'S SIGNATURE SERVICE	On this form have been check and corrected for proper operation as required.			ecked er
NAME (PLEASE PRINT) NAME (PLEASE PRINT)				
Date Dealer Name Dealer Code Vehicle Identification Number (Sticker)				

D/C CUT FUSE INSTALLATION

To minimize battery discharge the D/C Cut Fuse has been removed and is stored in the engine compartment Relay Block. Install the D/C Cut Fuse and confirm all related DTCs are cleared.



1 D/C Cut Fuse Storage Location

2 Install D/C Cut Fuse Here

TPWS INITIALIZATION

Refer to the Repair Manual for the Initialization Procedure.

NOTE

- Please note the spare tire does NOT have a TPWS sensor.
- To adjust the tire pressure correctly when the outside temperature is significantly colder than shop temperature, perform a Health Check using Techstream and select the "Compensation Tire Pressure" checkbox. Compensation pressures will be displayed on the Health Check results screen. Adjust the tire pressure when the tires are cold.

FRONT LICENSE PLATE & MOUNTING BRACKET INSTALLATION*

1. Align holes "A" of the mounting bracket with the dimples on the front bumper cover. Mark the location of holes "B" on the front bumper cover.

NOTE


- · Holes "A" are used for installation of the mounting bracket to the bumper cover.
- · Holes "B" are used for the installation of the front license plate to the mounting bracket.
- 2. Drill 2 relief holes with a diameter of 11 mm (0.43 in.) at the hole "B" marks on the front bumper cover to prevent the license plate retaining bolt end from contacting cover.

Do NOT drill at the dimples on the front bumper cover.

- 3. Install the mounting bracket to the front bumper cover by attaching the 2 self-tapping screws into the dimples.
- 4. Install the front license plate to the mounting bracket using bolts with the following measurements:

Length: 15.0 - 23.0 mm (0.59 - 0.91 in.)

Diameter: 6.0 mm (0.24 in.) Pitch: 1.0 mm (0.04 in.)

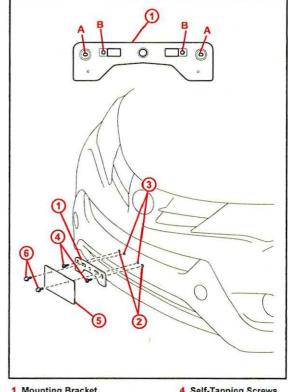

- **Mounting Bracket**
- 2 Dimples
- 3 Mark and Drill Holes
- 4 Self-Tapping Screws
- 5 License Plate
- 6 Bolts