

**RIDE THE DUCKS INTERNATIONAL**  
Fleet Operations & Safety  
2320 West Highway 76  
Branson MO 65616

**Bulletin No.** SB-00-10-13  
**Release Date:** 5/20/13  
**Effective Date:** 5/20/13  
**Supersedes:** N/A  
**Completion Date:** 250 P/I  
**Applicable to:** All Diesel Truck  
Ducks  
**Total Pages:** 1



## SERVICE BULLETIN

**REASON FOR RELEASE:** To mitigate the risk associated with axle shaft bolts coming loose.


**Urgency:**

Modification should take place as part of the 250 hour Periodic Inspection or sooner.

**General:**

This modification consists of a drilling a single hole in the head of each bolt that secures the axle shaft to the wheel hub (8 bolts total)

**Visual Direction**

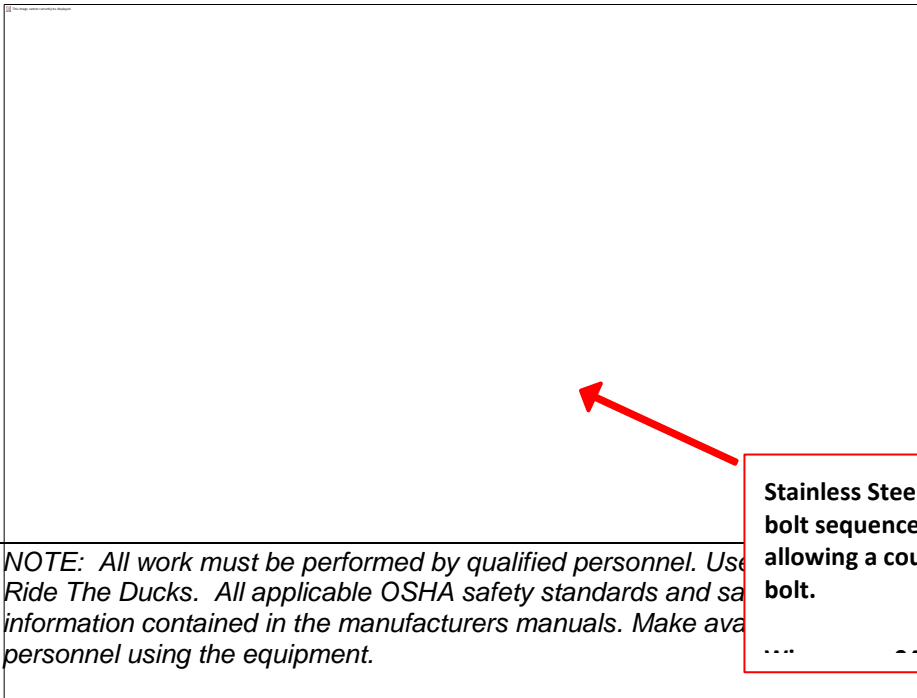

**Stainless Steel Lock Wire, attached in a two bolt sequence. Ensure wire is secured not allowing a counter clockwise rotation of the bolt.**

*NOTE: All work must be performed by qualified personnel. Use Ride The Ducks. All applicable OSHA safety standards and safety information contained in the manufacturers manuals. Make available to personnel using the equipment.*

*provided by  
serve all safety  
information to*

[CONTACT US VIA EMAIL](#)

RTDI FLEET OPS HOTLINE: 417 266 7676

RTDI PARTS: 417 266 7626