

Subject

**Shift Knob Service Precaution - Disengage Shift Boot before tightening/loosening**

Market

**USA**

Service Category

**Drivetrain**

Section

**Automatic Transmission/Transaxle**

Applicability

**2015 Camry, Camry HV**

**APPLICABLE VEHICLES**

2015

Camry

2015

Camry HV

**CONDITION**

When performing a service in which the shift knob is either tightened or loosened, the shift boot must be disengaged to prevent the boot from twisting around the shift lever.




**RECOMMENDATIONS**

Prior to tightening/loosening the shift knob, disengage the shift boot.

PROCEDURE TO DISENGAGE THE SHIFT BOOT

Simultaneously pull down on the boot from both sides where it attaches to the knob (either the front/back or the left/right sides) and the attaching claws will disengage from the shift knob.

Note: If the boot is pulled at only one side it will be difficult to disengage the claws.

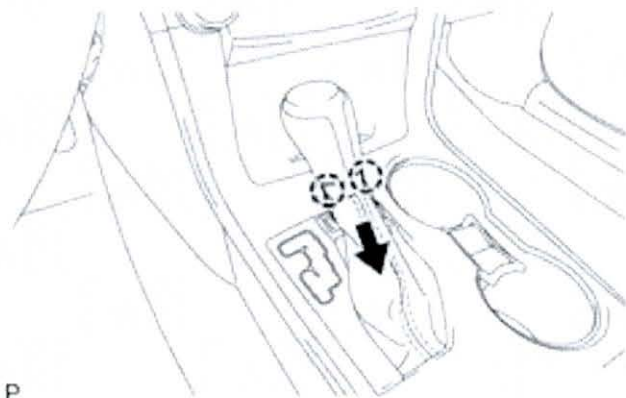

P

Subject

# Shift Knob Service Precaution - Disengage Shift Boot before tightening/loosening


Market

**USA**

Applicability


## INSTALLATION PROCEDURE FOR SHIFT KNOB

1. Screw the shift knob onto the shift lever shaft. After the shaft thread reaches the incomplete thread portion of the knob insert, the knob must be rotated an additional one (1) full rotation clockwise.
2. In the tightening direction (clockwise), rotate the knob such that it is oriented correctly.

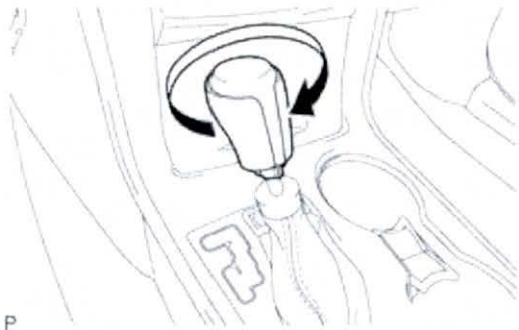

3. After installing the knob, pull the shift boot up to the shift knob to engage the claws.

Note: During installation do not twist the boot.

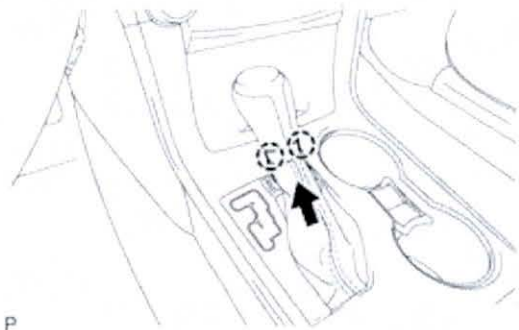

## **LINK REFERENCES**

This Tech Tip does not contain any link references